


MAGNUM FUTURE LED XS

GENERAL CARD

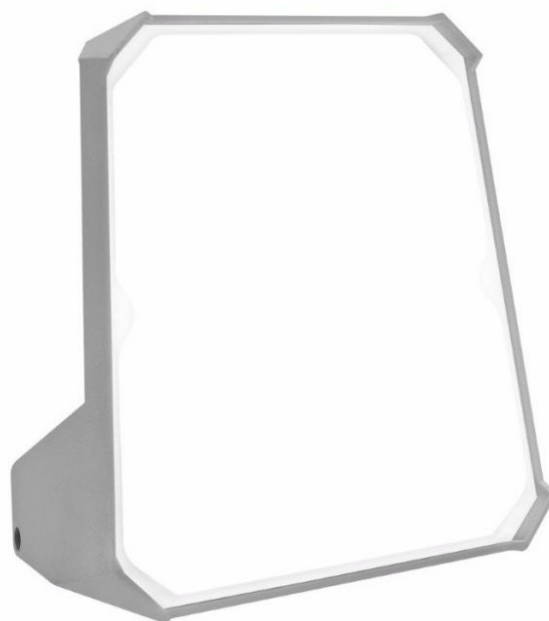

TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Nominal power [W]:	20.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	2300
Supply voltage [V]:	220-240; 24; 42-48
Electrical protection class:	I; II; III
Material of the body:	PP
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	192/193/123;
Energy efficiency class:	D

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylene (PP). Anti-glare diffuser which transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

MAGNUM FUTURE LED XS

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	4000	2300	CEE			3	III	IP44	192/193/123	D	>> 248467
20	4000	2300	TRAFO			3	III	IP44	192/193/123	D	>> 248474
20	4000	2300	CEE			3	III	IP44	192/193/123	D	>> 248450
20	4000	2300	DK			3	II	IP44	192/193/123	D	>> 248481
20	4000	2300	UNI-SCHUKO			3	II	IP54	192/193/123	D	>> 248351
20	4000	2300	DK	DK	1	3	I	IP44	192/193/123	D	>> 248498
20	4000	2300	UNI-SCHUKO	PL-FR	1	3	I	IP54	192/193/123	D	>> 248368
20	4000	2300	UNI-SCHUKO	SCHUKO	1	3	I	IP54	192/193/123	D	>> 248405
20	4000	2300	TRAFO			3	III	IP44	192/193/123	D	>> 248740
20	4000	2300	CEE			3	III	IP44	192/193/123	D	>> 248726
20	4000	2300	DK			3	II	IP44	192/193/123	D	>> 248757
20	4000	2300	DK	DK	1	3	I	IP44	192/193/123	D	>> 248764
20	4000	2300	UNI-SCHUKO	PL-FR	1	3	I	IP54	192/193/123	D	>> 248535
20	4000	2300	UNI-SCHUKO	SCHUKO	1	3	I	IP54	192/193/123	D	>> 248689
20	4000	2300	CEE			3	III	IP44	192/193/123	D	>> 248733
20	4000	2300	UNI-SCHUKO			3	II	IP54	192/193/123	D	>> 248528

MAGNUM FUTURE LED XS

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

Card creation date: 11 May 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 173/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl