


# MAGNUM FUTURE LED XS

GENERAL CARD

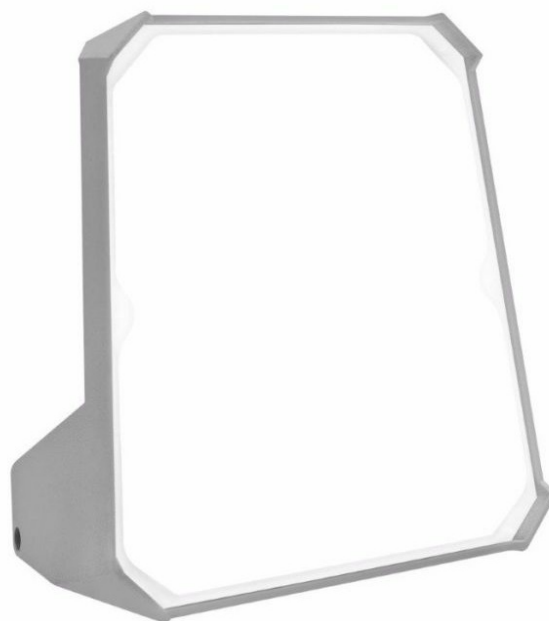

## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP44; IP54
<b>Impact resistance:</b>	IK10
<b>Nominal power [W]:</b>	20.00
<b>Colour temperature [K]:</b>	4000
<b>Luminous flux [lm]*:</b>	2300
<b>Supply voltage [V]:</b>	220-240; 24; 42-48
<b>Electrical protection class:</b>	I; II; III
<b>Material of the body:</b>	PP
<b>Colour of the body:</b>	grey
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	frozen
<b>Dimensions (H/W/T/S) [mm]:</b>	192/193/123;
<b>Energy efficiency class:</b>	D

## CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylene (PP). Anti-glare diffuser which transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

## APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

# MAGNUM FUTURE LED XS

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	4000	2300	CEE			3	III	IP44	192/193/123	D	<a href="#">&gt;&gt; 248467</a>
20	4000	2300	TRAFO			3	III	IP44	192/193/123	D	<a href="#">&gt;&gt; 248474</a>
20	4000	2300	CEE			3	III	IP44	192/193/123	D	<a href="#">&gt;&gt; 248450</a>
20	4000	2300	DK			3	II	IP44	192/193/123	D	<a href="#">&gt;&gt; 248481</a>
20	4000	2300	UNI-SCHUKO			3	II	IP54	192/193/123	D	<a href="#">&gt;&gt; 248351</a>
20	4000	2300	DK	DK	1	3	I	IP44	192/193/123	D	<a href="#">&gt;&gt; 248498</a>
20	4000	2300	UNI-SCHUKO	PL-FR	1	3	I	IP54	192/193/123	D	<a href="#">&gt;&gt; 248368</a>
20	4000	2300	UNI-SCHUKO	SCHUKO	1	3	I	IP54	192/193/123	D	<a href="#">&gt;&gt; 248405</a>
20	4000	2300	TRAFO			3	III	IP44	192/193/123	D	<a href="#">&gt;&gt; 248740</a>
20	4000	2300	CEE			3	III	IP44	192/193/123	D	<a href="#">&gt;&gt; 248726</a>
20	4000	2300	DK			3	II	IP44	192/193/123	D	<a href="#">&gt;&gt; 248757</a>
20	4000	2300	DK	DK	1	3	I	IP44	192/193/123	D	<a href="#">&gt;&gt; 248764</a>
20	4000	2300	UNI-SCHUKO	PL-FR	1	3	I	IP54	192/193/123	D	<a href="#">&gt;&gt; 248535</a>
20	4000	2300	UNI-SCHUKO	SCHUKO	1	3	I	IP54	192/193/123	D	<a href="#">&gt;&gt; 248689</a>
20	4000	2300	CEE			3	III	IP44	192/193/123	D	<a href="#">&gt;&gt; 248733</a>
20	4000	2300	UNI-SCHUKO			3	II	IP54	192/193/123	D	<a href="#">&gt;&gt; 248528</a>

# MAGNUM FUTURE LED XS

GENERAL CARD

## ACCESSORIES AVAILABLE

index	Name
<a href="#">000737</a>	FUTURE STAND Tripod with Click Head System
<a href="#">000720</a>	Standard tripod



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

Card creation date: 08 November 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 173/2023