


MAGNUM FUTURE LED XS ACCU

GENERAL CARD

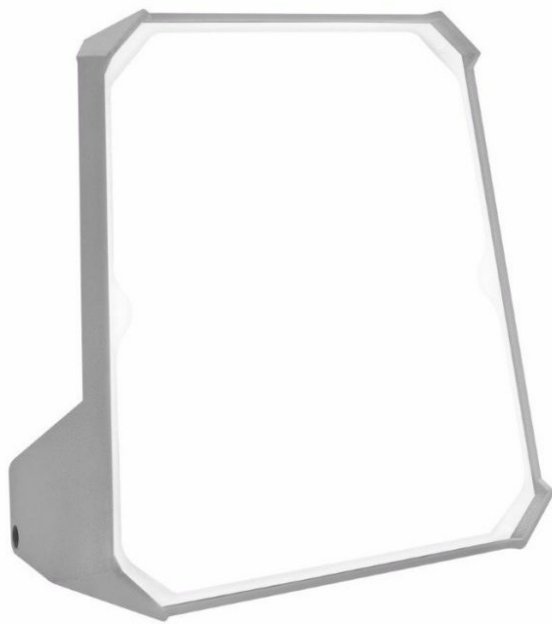

TECHNICAL PARAMETERS

Ingress protection:	IP54/20
Impact resistance:	IK10
Nominal power [W]:	20.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	2000
Supply voltage [V]:	220-240
Energy efficiency class:	E
Electrical protection class:	II
Material of the body:	PP
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	192/193/123;

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polipropylene (PP). Anti-glare diffuser made of polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

MAGNUM FUTURE LED XS ACCU

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Cable length [m]	Switch	Index
20	4000	2000	120	2	yes	>> 248511
20	4000	2000	45	2	yes	>> 248818

MAGNUM FUTURE LED XS ACCU

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
000737	FUTURE STAND Tripod with Click Head System
000720	Standard tripod
315039	Set of magnets for Magnum XS (2 pcs.)



FUTURE STAND Tripod with Click Head System (000737)



Standard tripod (000720)

Card creation date: 08 November 2023
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 174/2023