
SQ 160 LED N

GENERAL CARD

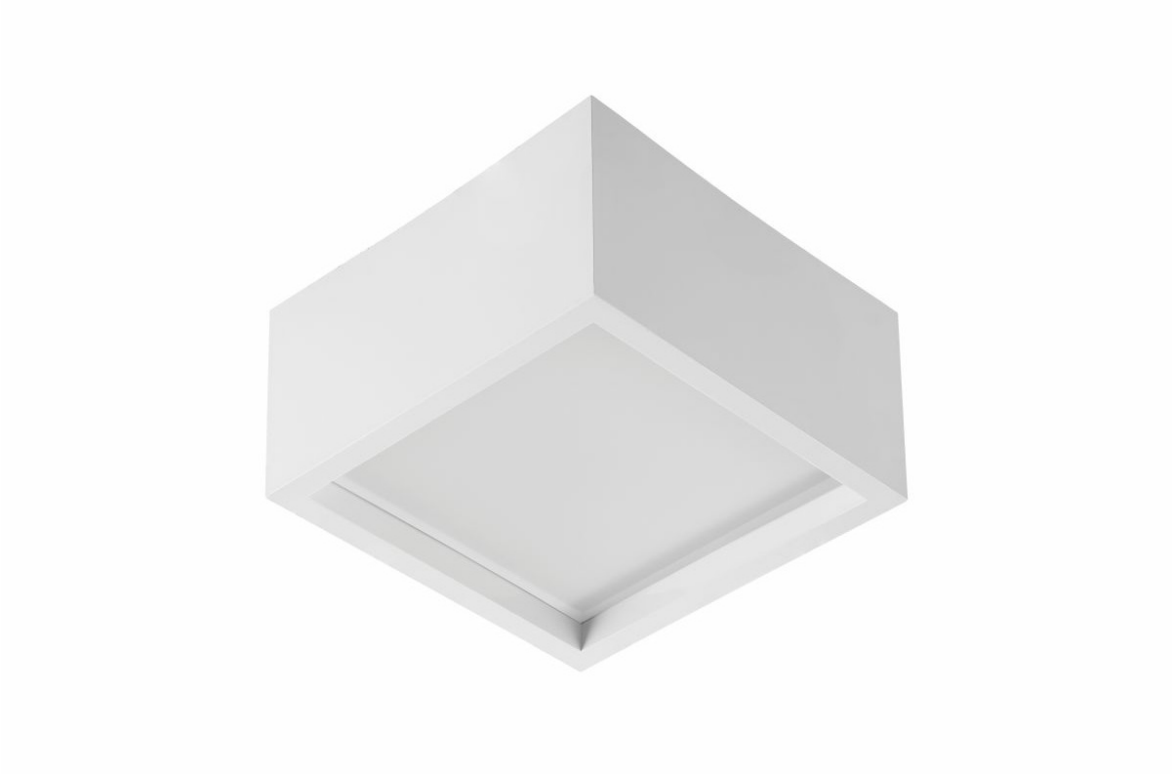

TECHNICAL PARAMETERS

Ingress protection:	IP33
Impact resistance:	IK08
Nominal power [W]:	17.00
Luminous flux [lm]*:	1700 - 2200
Colour temperature [K]:	3000; 4000
Color rendering index (Ra) >:	80
Energy efficiency class:	D; E
Material of the body:	ABS
Colour of the body:	white
Diffuser material:	PS
Diffuser type:	OPAL; PRM; matt
Beam angle [°]:	75; 110; 115
Mounting version:	surface
Working temperature [°C]:	from -20 to +35
Dimensions (H/W/T/S) [mm]:	162/162/86;
Warranty [years]:	5

CHARACTERISTICS

SQ 160 LED N is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

APPLICATION

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.

SQ 160 LED N

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

SQ 160 LED N 17W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	Energy efficiency class	Index
17	3000	1700	matt	110	E	>> 571084
17	4000	1800	matt	110	E	>> 570933
17	3000	2100	PRM	115	D	>> 571138
17	4000	2200	PRM	115	D	>> 570988
17	3000	2050	OPAL	75	E	>> 571183
17	4000	2050	OPAL	75	E	>> 571039

SQ 160 LED N

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
573743	Suspension SQ160 157x157mm black ON/OFF. DALI

Card creation date: 30 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 314/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl