


# SQ 160 LED PLUS N

GENERAL CARD

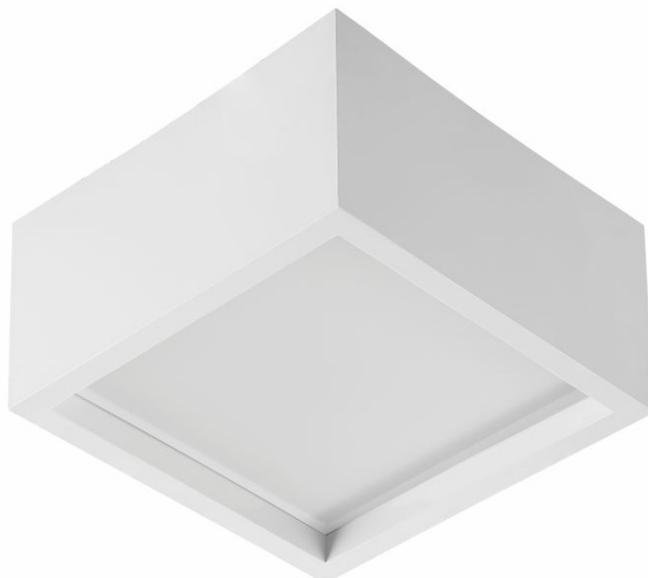

## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP33
<b>Impact resistance:</b>	IK08
<b>Nominal power [W]:</b>	17.00
<b>Luminous flux [lm]*:</b>	1700 - 2200
<b>Colour temperature [K]:</b>	3000; 4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>SDCM:</b>	3
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	D; E; F
<b>Material of the body:</b>	ABS
<b>Colour of the body:</b>	white
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	OPAL; PRM; matt
<b>Mounting version:</b>	surface
<b>Dimensions (H/W/T/S) [mm]:</b>	162/162/86;

## CHARACTERISTICS

SQ 160 LED PLUS N is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.

# SQ 160 LED PLUS N

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details


### SQ 160 LED PLUS N 17W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	DIMM DALI	Emergency lighting [h]	Index
17	3000	1700	matt	110			<a href="#">&gt;&gt; 572340</a>
17	3000	1700	matt	110	yes		<a href="#">&gt;&gt; 572364</a>
17	3000	1700	matt	110		3	<a href="#">&gt;&gt; 572357</a>
17	4000	1800	matt	110		3	<a href="#">&gt;&gt; 572265</a>
17	4000	1800	matt	110			<a href="#">&gt;&gt; 572258</a>
17	4000	1800	matt	110	yes		<a href="#">&gt;&gt; 572272</a>
17	3000	1900	OPAL	75			<a href="#">&gt;&gt; 572401</a>
17	3000	1900	OPAL	75		3	<a href="#">&gt;&gt; 572418</a>
17	3000	1900	OPAL	75	yes		<a href="#">&gt;&gt; 572425</a>
17	4000	2050	OPAL	75			<a href="#">&gt;&gt; 572319</a>
17	4000	2050	OPAL	75	yes		<a href="#">&gt;&gt; 572333</a>
17	4000	2050	OPAL	75		3	<a href="#">&gt;&gt; 572326</a>
17	3000	2100	PRM	115		3	<a href="#">&gt;&gt; 572388</a>
17	3000	2100	PRM	115			<a href="#">&gt;&gt; 572371</a>
17	3000	2100	PRM	115	yes		<a href="#">&gt;&gt; 572395</a>
17	4000	2200	PRM	115		3	<a href="#">&gt;&gt; 572296</a>
17	4000	2200	PRM	115			<a href="#">&gt;&gt; 572289</a>
17	4000	2200	PRM	115	yes		<a href="#">&gt;&gt; 572302</a>


# SQ 160 LED PLUS N

GENERAL CARD


## LUMINOUS INTENSITY DISTRIB. CURVE



SQ MAT



SQ OPAL



SQ PRM

# SQ 160 LED PLUS N

GENERAL CARD

## ACCESSORIES AVAILABLE

index	Name
573743	Suspension SQ160 157x157mm black ON/OFF. DALI

Card creation date: 24 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 13/2024; 208/2020



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl