


SQ 100 LED PLUS N

GENERAL CARD

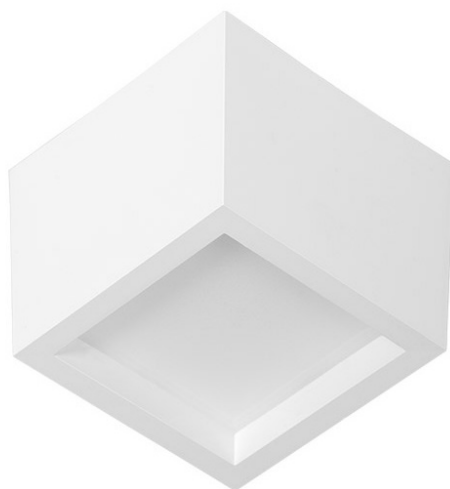

TECHNICAL PARAMETERS

Ingress protection:	IP33
Rated power of the luminaire [W]*:	6.00
Luminous flux [lm]*:	590; 630
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Energy efficiency class:	E
Material of the body:	ABS
Colour of the body:	white
Diffuser material:	PC
Diffuser type:	MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	108/108/85;
Warranty [years]:	5

CHARACTERISTICS

SQ 100 LED PLUS N is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

APPLICATION

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.

SQ 100 LED PLUS N

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
6	3000	590	E	>> 572654
6	4000	630	E	>> 572630