


BARIS 52 LED

GENERAL CARD

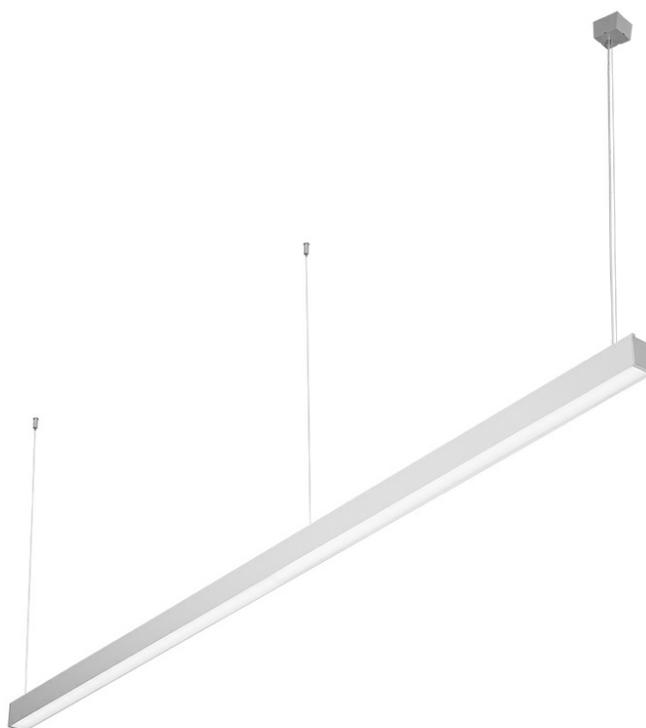

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	18.00 - 150.00
Luminaire power [W/m]:	18.00; 30.00
Luminous flux [lm]*:	2400 - 19800
Colour temperature [K]:	4000
Energy efficiency class:	D
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	69/52/1143-5623
Impact resistance:	IK03

CHARACTERISTICS

A suspended or surface-mounted luminaire with classic proportions and a modern design. The lamp's design allows for the creation of lines up to 6 meters long without profile joints and up to 25 meters without shade joints. Straight connectors and luminous L-, T-, X-, and V-shaped bends allow for the creation of virtually unlimited straight lines, shapes, and patterns. The lamp body is made of an anodized gray aluminum profile or an aluminum profile painted white or black (other colors available upon request). The optical system consists of a prismatic shade (PRM) or a dedicated, flexible opal diffuser that evenly illuminates the lamp. The lamp's modularity and disassembly allow for the replacement of electronic components, such as the LED strip and power supply, and the lampshade itself. The lamp's profile has been adapted for use with intelligent IOT modules, further optimizing the level and quantity of light delivered. A Direct/Indirect version is also available, allowing for some of the light to be directed upwards, illuminating the ceiling. The pendant lamp is not equipped with suspension system components. Due to the extensive customization options, the number of power supply and 1.2m support suspensions, as well as surface-mounted boxes, can be selected from the accessories, depending on your specific needs. **Custom color versions, CRI90, with IoT modules and sensors, DALI versions, and emergency modules are available upon request. Standard colors include anodized gray, black, and white.**

APPLICATION

This lamp is designed for indoor use. It can be used as a main light source and supports office work requiring visual focus. Its unique design, energy-efficient LED modules, and compatibility with external DALI lighting control systems make it suitable for use in modern Class A+ office buildings, with particular emphasis on representative rooms, conference rooms, passageways, and anywhere else requiring IP44 ingress protection. For surface-mounted and pendant BARIS 52 LED lamps (OPAL, PRM), a separate shade (available as an accessory) with the appropriate length, representing the sum of all lines, must be ordered separately. The shade, available in 0.5m increments, is cut by the contractor and has a maximum length of 25m.

BARIS 52 LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 52 LED 1143/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	2400	133	OPAL	grey	yes	1143/69/52	suspended	>> 153242
18	4000	2400	133	OPAL	grey		1143/69/52	suspended	>> 153228
30	4000	3975	133	OPAL	grey	yes	1143/69/52	suspended	>> 153259
30	4000	3975	133	OPAL	grey		1143/69/52	suspended	>> 153235
18	4000	2400	133	OPAL	grey	yes	1143/69/52	surface	>> 152542
18	4000	2400	133	OPAL	grey		1143/69/52	surface	>> 152511
30	4000	3975	133	OPAL	grey	yes	1143/69/52	surface	>> 152559
30	4000	3975	133	OPAL	grey		1143/69/52	surface	>> 152528

BARIS 52 LED 1423/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	2925	133	OPAL	grey	yes	1423/69/52	suspended	>> 153280
18	4000	2925	133	OPAL	grey		1423/69/52	suspended	>> 153266
30	4000	5025	132	OPAL	grey	yes	1423/69/52	suspended	>> 153297
30	4000	5025	132	OPAL	grey		1423/69/52	suspended	>> 153273
18	4000	2925	133	OPAL	grey	yes	1423/69/52	surface	>> 152580
18	4000	2925	133	OPAL	grey		1423/69/52	surface	>> 152566
30	4000	5025	132	OPAL	grey	yes	1423/69/52	surface	>> 152597
30	4000	5025	132	OPAL	grey		1423/69/52	surface	>> 152573

BARIS 52 LED 1703/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	3575	132	OPAL	grey	yes	1703/69/52	suspended	>> 153327
18	4000	3575	132	OPAL	grey		1703/69/52	suspended	>> 153303
30	4000	5950	132	OPAL	grey	yes	1703/69/52	suspended	>> 153334
30	4000	5950	132	OPAL	grey		1703/69/52	suspended	>> 153310
18	4000	3575	132	OPAL	grey	yes	1703/69/52	surface	>> 152627
18	4000	3575	132	OPAL	grey		1703/69/52	surface	>> 152603
30	4000	5950	132	OPAL	grey	yes	1703/69/52	surface	>> 152641
30	4000	5950	132	OPAL	grey		1703/69/52	surface	>> 152610

BARIS 52 LED

GENERAL CARD

BARIS 52 LED 1983/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	4175	135	OPAL	grey	yes	1983/69/52	suspended	>> 153365
18	4000	4175	135	OPAL	grey		1983/69/52	suspended	>> 153341
30	4000	6950	134	OPAL	grey	yes	1983/69/52	suspended	>> 153372
30	4000	6950	134	OPAL	grey		1983/69/52	suspended	>> 153358
18	4000	4175	135	OPAL	grey	yes	1983/69/52	surface	>> 152672
18	4000	4175	135	OPAL	grey		1983/69/52	surface	>> 152658
30	4000	6950	134	OPAL	grey	yes	1983/69/52	surface	>> 152689
30	4000	6950	134	OPAL	grey		1983/69/52	surface	>> 152665

BARIS 52 LED 2263/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	4775	133	OPAL	grey	yes	2263/69/52	suspended	>> 153402
18	4000	4775	133	OPAL	grey		2263/69/52	suspended	>> 153389
30	4000	7925	132	OPAL	grey	yes	2263/69/52	suspended	>> 153419
30	4000	7925	132	OPAL	grey		2263/69/52	suspended	>> 153396
18	4000	4775	133	OPAL	grey	yes	2263/69/52	surface	>> 152719
18	4000	4775	133	OPAL	grey		2263/69/52	surface	>> 152696
30	4000	7925	132	OPAL	grey	yes	2263/69/52	surface	>> 152726
30	4000	7925	132	OPAL	grey		2263/69/52	surface	>> 152702

BARIS 52 LED 2543/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	5350	134	OPAL	grey	yes	2543/69/52	suspended	>> 153440
18	4000	5350	134	OPAL	grey		2543/69/52	suspended	>> 153426
30	4000	8925	133	OPAL	grey	yes	2543/69/52	suspended	>> 153457
30	4000	8925	133	OPAL	grey		2543/69/52	suspended	>> 153433
18	4000	5350	134	OPAL	grey	yes	2543/69/52	surface	>> 152757
18	4000	5350	134	OPAL	grey		2543/69/52	surface	>> 152733
30	4000	8925	133	OPAL	grey	yes	2543/69/52	surface	>> 152764
30	4000	8925	133	OPAL	grey		2543/69/52	surface	>> 152740

BARIS 52 LED 2823/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	5950	132	OPAL	grey	yes	2823/69/52	suspended	>> 153488
18	4000	5950	132	OPAL	grey		2823/69/52	suspended	>> 153464
30	4000	9900	132	OPAL	grey	yes	2823/69/52	suspended	>> 153495

BARIS 52 LED

GENERAL CARD

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
30	4000	9900	132	OPAL	grey		2823/69/52	suspended	>> 153471
18	4000	5950	132	OPAL	grey	yes	2823/69/52	surface	>> 152795
18	4000	5950	132	OPAL	grey		2823/69/52	surface	>> 152771
30	4000	9900	132	OPAL	grey	yes	2823/69/52	surface	>> 152801
30	4000	9900	132	OPAL	grey		2823/69/52	surface	>> 152788

BARIS 52 LED 3103/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	6550	134	OPAL	grey	yes	3103/69/52	suspended	>> 153525
18	4000	6550	134	OPAL	grey		3103/69/52	suspended	>> 153501
30	4000	10900	133	OPAL	grey	yes	3103/69/52	suspended	>> 153532
30	4000	10900	133	OPAL	grey		3103/69/52	suspended	>> 153518
18	4000	6550	134	OPAL	grey	yes	3103/69/52	surface	>> 152832
18	4000	6550	134	OPAL	grey		3103/69/52	surface	>> 152818
30	4000	10900	133	OPAL	grey	yes	3103/69/52	surface	>> 152849
30	4000	10900	133	OPAL	grey		3103/69/52	surface	>> 152825

BARIS 52 LED 3383/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	7150	132	OPAL	grey	yes	3383/69/52	suspended	>> 153563
18	4000	7150	132	OPAL	grey		3383/69/52	suspended	>> 153549
30	4000	11900	132	OPAL	grey	yes	3383/69/52	suspended	>> 153570
30	4000	11900	132	OPAL	grey		3383/69/52	suspended	>> 153556
18	4000	7150	132	OPAL	grey	yes	3383/69/52	surface	>> 152870
18	4000	7150	132	OPAL	grey		3383/69/52	surface	>> 152856
30	4000	11900	132	OPAL	grey	yes	3383/69/52	surface	>> 152887
30	4000	11900	132	OPAL	grey		3383/69/52	surface	>> 152863

BARIS 52 LED 3663/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	7725	133	OPAL	grey	yes	3663/69/52	suspended	>> 153600
18	4000	7725	133	OPAL	grey		3663/69/52	suspended	>> 153587
30	4000	12875	133	OPAL	grey	yes	3663/69/52	suspended	>> 153617
30	4000	12875	133	OPAL	grey		3663/69/52	suspended	>> 153594
18	4000	7725	133	OPAL	grey	yes	3663/69/52	surface	>> 152917
18	4000	7725	133	OPAL	grey		3663/69/52	surface	>> 152894
30	4000	12875	133	OPAL	grey	yes	3663/69/52	surface	>> 152924
30	4000	12875	133	OPAL	grey		3663/69/52	surface	>> 152900

BARIS 52 LED

GENERAL CARD

BARIS 52 LED 3943/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	8325	132	OPAL	grey	yes	3943/69/52	suspended	>> 153648
18	4000	8325	132	OPAL	grey		3943/69/52	suspended	>> 153624
30	4000	13875	132	OPAL	grey	yes	3943/69/52	suspended	>> 153655
30	4000	13875	132	OPAL	grey		3943/69/52	suspended	>> 153631
18	4000	8325	132	OPAL	grey	yes	3943/69/52	surface	>> 152955
18	4000	8325	132	OPAL	grey		3943/69/52	surface	>> 152931
30	4000	13875	132	OPAL	grey	yes	3943/69/52	surface	>> 152962
30	4000	13875	132	OPAL	grey		3943/69/52	surface	>> 152948

BARIS 52 LED 4223/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	8925	133	OPAL	grey	yes	4223/69/52	suspended	>> 153686
18	4000	8925	133	OPAL	grey		4223/69/52	suspended	>> 153662
30	4000	14850	133	OPAL	grey	yes	4223/69/52	suspended	>> 153693
30	4000	14850	133	OPAL	grey		4223/69/52	suspended	>> 153679
18	4000	8925	133	OPAL	grey	yes	4223/69/52	surface	>> 152993
18	4000	8925	133	OPAL	grey		4223/69/52	surface	>> 152979
30	4000	14850	133	OPAL	grey	yes	4223/69/52	surface	>> 153013
30	4000	14850	133	OPAL	grey		4223/69/52	surface	>> 152986

BARIS 52 LED 4503/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	9525	132	OPAL	grey	yes	4503/69/52	suspended	>> 153723
18	4000	9525	132	OPAL	grey		4503/69/52	suspended	>> 153709
30	4000	15850	132	OPAL	grey	yes	4503/69/52	suspended	>> 153730
30	4000	15850	132	OPAL	grey		4503/69/52	suspended	>> 153716
18	4000	9525	132	OPAL	grey	yes	4503/69/52	surface	>> 153044
18	4000	9525	132	OPAL	grey		4503/69/52	surface	>> 153020
30	4000	15850	132	OPAL	grey	yes	4503/69/52	surface	>> 153051
30	4000	15850	132	OPAL	grey		4503/69/52	surface	>> 153037

BARIS 52 LED 4783/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	10100	133	OPAL	grey	yes	4783/69/52	suspended	>> 153761
18	4000	10100	133	OPAL	grey		4783/69/52	suspended	>> 153747
30	4000	16850	133	OPAL	grey	yes	4783/69/52	suspended	>> 153778

BARIS 52 LED

GENERAL CARD

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
30	4000	16850	133	OPAL	grey		4783/69/52	suspended	>> 153754
18	4000	10100	133	OPAL	grey	yes	4783/69/52	surface	>> 153082
18	4000	10100	133	OPAL	grey		4783/69/52	surface	>> 153068
30	4000	16850	133	OPAL	grey	yes	4783/69/52	surface	>> 153099
30	4000	16850	133	OPAL	grey		4783/69/52	surface	>> 153075

BARIS 52 LED 5063/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	10700	132	OPAL	grey	yes	5063/69/52	suspended	>> 153808
18	4000	10700	132	OPAL	grey		5063/69/52	suspended	>> 153785
30	4000	17825	132	OPAL	grey	yes	5063/69/52	suspended	>> 153815
30	4000	17825	132	OPAL	grey		5063/69/52	suspended	>> 153792
18	4000	10700	132	OPAL	grey	yes	5063/69/52	surface	>> 153129
18	4000	10700	132	OPAL	grey		5063/69/52	surface	>> 153105
30	4000	17825	132	OPAL	grey	yes	5063/69/52	surface	>> 153136
30	4000	17825	132	OPAL	grey		5063/69/52	surface	>> 153112

BARIS 52 LED 5343/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	11300	133	OPAL	grey	yes	5343/69/52	suspended	>> 153846
18	4000	11300	133	OPAL	grey		5343/69/52	suspended	>> 153822
30	4000	18825	133	OPAL	grey	yes	5343/69/52	suspended	>> 153853
30	4000	18825	133	OPAL	grey		5343/69/52	suspended	>> 153839
18	4000	11300	133	OPAL	grey	yes	5343/69/52	surface	>> 153167
18	4000	11300	133	OPAL	grey		5343/69/52	surface	>> 153143
30	4000	18825	133	OPAL	grey	yes	5343/69/52	surface	>> 153174
30	4000	18825	133	OPAL	grey		5343/69/52	surface	>> 153150

BARIS 52 LED 5623/69/52mm

Luminaire power [W/m]	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
18	4000	11900	132	OPAL	grey	yes	5623/69/52	suspended	>> 153884
18	4000	11900	132	OPAL	grey		5623/69/52	suspended	>> 153860
30	4000	19800	132	OPAL	grey	yes	5623/69/52	suspended	>> 153891
30	4000	19800	132	OPAL	grey		5623/69/52	suspended	>> 153877
18	4000	11900	132	OPAL	grey	yes	5623/69/52	surface	>> 153204
18	4000	11900	132	OPAL	grey		5623/69/52	surface	>> 153181
30	4000	19800	132	OPAL	grey	yes	5623/69/52	surface	>> 153211
30	4000	19800	132	OPAL	grey		5623/69/52	surface	>> 153198

BARIS 52 LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
318023	Baris 52 - linear connector. straight
318030	Baris 52 - white power suspension
318047	Baris 52 - black power suspension
318054	Baris 52 - anodized power suspension
318061	Baris 52 - Dali white power suspension
318078	Baris 52 - Dali black power suspension
318085	Dali anodized power suspension
318092	Baris 52 – suspension
673979	Baris 52 - DALI linear connector
442629	Baris 52 - Touch DIM linear connector
465703	Baris 52 diffuser UGR length of 12500mm (12.5m)
465710	Baris 52 diffuser UGR length of 13000mm (13.0m)
465727	Baris 52 diffuser UGR length of 13500mm (13.5m)
465734	Baris 52 diffuser UGR length of 14000mm (14.0m)
465741	Baris 52 diffuser UGR length of 14500mm (14.5m)
465758	Baris 52 diffuser UGR length of 15000mm (15.0m)
465765	Baris 52 diffuser UGR length of 15500mm (15.5m)
465772	Baris 52 diffuser UGR length of 16000mm (16.0m)
465789	Baris 52 diffuser UGR length of 16500mm (16.5m)
465796	Baris 52 diffuser UGR length of 17000mm (17.0m)
465802	Baris 52 diffuser UGR length of 17500mm (17.5m)
465819	Baris 52 diffuser UGR length of 18000mm (18.0m)
465826	Baris 52 diffuser UGR length of 18500mm (18.5m)
465833	Baris 52 diffuser UGR length of 19000mm (19.0m)
465840	Baris 52 diffuser UGR length of 19500mm (19.5m)
465857	Baris 52 diffuser UGR length of 20000mm (20.0m)
465864	Baris 52 diffuser UGR length of 20500mm (20.5m)
465871	Baris 52 diffuser UGR length of 21000mm (21.0m)
465888	Baris 52 diffuser UGR length of 21500mm (21.5m)
465895	Baris 52 diffuser UGR length of 22000mm (22.0m)
465901	Baris 52 diffuser UGR length of 22500mm (22.5m)
465918	Baris 52 diffuser UGR length of 23000mm (23.0m)
465925	Baris 52 diffuser UGR length of 23500mm (23.5m)
465000	Baris 52 diffuser PLX length of 1500mm (1.5m)
465017	Baris 52 diffuser PLX length of 2000mm (2.0m)
465024	Baris 52 diffuser PLX length of 2500mm (2.5m)
465031	Baris 52 diffuser PLX length of 3000mm (3.0m)

BARIS 52 LED

GENERAL CARD

465048	Baris 52 diffuser PLX length of 3500mm (3.5m)
465055	Baris 52 diffuser PLX length of 4000mm (4.0m)
465062	Baris 52 diffuser PLX length of 4500mm (4.5m)
465079	Baris 52 diffuser PLX length of 5000mm (5.0m)
465086	Baris 52 diffuser PLX length of 5500mm (5.5m)
465093	Baris 52 diffuser PLX length of 6000mm (6.0m)
465109	Baris 52 diffuser PLX length of 6500mm (6.5m)
465116	Baris 52 diffuser PLX length of 7000mm (7.0m)
465123	Baris 52 diffuser PLX length of 7500mm (7.5m)
465130	Baris 52 diffuser PLX length of 8000mm (8.0m)
465147	Baris 52 diffuser PLX length of 8500mm (8.5m)
465154	Baris 52 diffuser PLX length of 9000mm (9.0m)
465161	Baris 52 diffuser PLX length of 9500mm (9.5m)
465178	Baris 52 diffuser PLX length of 10000mm (10.0m)
465185	Baris 52 diffuser PLX length of 10500mm (10.5m)
465192	Baris 52 diffuser PLX length of 11000mm (11.0m)
465208	Baris 52 diffuser PLX length of 11500mm (11.5m)
465215	Baris 52 diffuser PLX length of 12000mm (12.0m)
465222	Baris 52 diffuser PLX length of 12500mm (12.5m)
465239	Baris 52 diffuser PLX length of 13000mm (13.0m)
465246	Baris 52 diffuser PLX length of 13500mm (13.5m)
465253	Baris 52 diffuser PLX length of 14000mm (14.0m)
465260	Baris 52 diffuser PLX length of 14500mm (14.5m)
465277	Baris 52 diffuser PLX length of 15000mm (15.0m)
465284	Baris 52 diffuser PLX length of 15500mm (15.5m)
465291	Baris 52 diffuser PLX length of 16000mm (16.0m)
465307	Baris 52 diffuser PLX length of 16500mm (16.5m)
465314	Baris 52 diffuser PLX length of 17000mm (17.0m)
465321	Baris 52 diffuser PLX length of 17500mm (17.5m)
465338	Baris 52 diffuser PLX length of 18000mm (18.0m)
465345	Baris 52 diffuser PLX length of 18500mm (18.5m)
465352	Baris 52 diffuser PLX length of 19000mm (19.0m)
465369	Baris 52 diffuser PLX length of 19500mm (19.5m)
465376	Baris 52 diffuser PLX length of 20000mm (20.0m)
465383	Baris 52 diffuser PLX length of 20500mm (20.5m)
465390	Baris 52 diffuser PLX length of 21000mm (21.0m)
465406	Baris 52 diffuser PLX length of 21500mm (21.5m)
465413	Baris 52 diffuser PLX length of 22000mm (22.0m)
465420	Baris 52 diffuser PLX length of 22500mm (22.5m)

BARIS 52 LED

GENERAL CARD

465437	Baris 52 diffuser PLX length of 23000mm (23.0m)
465444	Baris 52 diffuser PLX length of 23500mm (23.5m)
465451	Baris 52 diffuser PLX length of 24000mm (24.0m)
465468	Baris 52 diffuser PLX length of 24500mm (24.5m)
465475	Baris 52 diffuser PLX length of 25000mm (25.0m)
465482	Baris 52 diffuser UGR length of 1500mm (1.5m)
465499	Baris 52 diffuser UGR length of 2000mm (2.0m)
465505	Baris 52 diffuser UGR length of 2500mm (2.5m)
465512	Baris 52 diffuser UGR length of 3000mm (3.0m)
465529	Baris 52 diffuser UGR length of 3500mm (3.5m)
465536	Baris 52 diffuser UGR length of 4000mm (4.0m)
465543	Baris 52 diffuser UGR length of 4500mm (4.5m)
465550	Baris 52 diffuser UGR length of 5000mm (5.0m)
465567	Baris 52 diffuser UGR length of 5500mm (5.5m)
465574	Baris 52 diffuser UGR length of 6000mm (6.0m)
465581	Baris 52 diffuser UGR length of 6500mm (6.5m)
465598	Baris 52 diffuser UGR length of 7000mm (7.0m)
465604	Baris 52 diffuser UGR length of 7500mm (7.5m)
465611	Baris 52 diffuser UGR length of 8000mm (8.0m)
465628	Baris 52 diffuser UGR length of 8500mm (8.5m)
465635	Baris 52 diffuser UGR length of 9000mm (9.0m)
465642	Baris 52 diffuser UGR length of 9500mm (9.5m)
465659	Baris 52 diffuser UGR length of 10000mm (10.0m)
465666	Baris 52 diffuser UGR length of 10500mm (10.5m)
465673	Baris 52 diffuser UGR length of 11000mm (11.0m)
465680	Baris 52 diffuser UGR length of 11500mm (11.5m)
465697	Baris 52 diffuser UGR length of 12000mm (12.0m)
465932	Baris 52 diffuser UGR length of 24000mm (24.0m)
465949	Baris 52 diffuser UGR length of 24500mm (24.5m)
465956	Baris 52 diffuser UGR length of 25000mm (25.0m)
465963	Baris 52 diffuser PRM length of 1500mm (1.5m)
465970	Baris 52 diffuser PRM length of 2000mm (2.0m)
465987	Baris 52 diffuser PRM length of 2500mm (2.5m)
465994	Baris 52 diffuser PRM length of 3000mm (3.0m)
466007	Baris 52 diffuser PRM length of 3500mm (3.5m)
466014	Baris 52 diffuser PRM length of 4000mm (4.0m)
466021	Baris 52 diffuser PRM length of 4500mm (4.5m)
466038	Baris 52 diffuser PRM length of 5000mm (5.0m)
466045	Baris 52 diffuser PRM length of 5500mm (5.5m)


BARIS 52 LED

GENERAL CARD

466052	Baris 52 diffuser PRM length of 6000mm (6.0m)
466069	Baris 52 diffuser PRM length of 6500mm (6.5m)
466076	Baris 52 diffuser PRM length of 7000mm (7.0m)
466083	Baris 52 diffuser PRM length of 7500mm (7.5m)
466090	Baris 52 diffuser PRM length of 8000mm (8.0m)
466106	Baris 52 diffuser PRM length of 8500mm (8.5m)
466113	Baris 52 diffuser PRM length of 9000mm (9.0m)
466120	Baris 52 diffuser PRM length of 9500mm (9.5m)
466137	Baris 52 diffuser PRM length of 10000mm (10.0m)
466144	Baris 52 diffuser PRM length of 10500mm (10.5m)
466151	Baris 52 diffuser PRM length of 11000mm (11.0m)
466168	Baris 52 diffuser PRM length of 11500mm (11.5m)
466175	Baris 52 diffuser PRM length of 12000mm (12.0m)
466182	Baris 52 diffuser PRM length of 12500mm (12.5m)
466199	Baris 52 diffuser PRM length of 13000mm (13.0m)
466205	Baris 52 diffuser PRM length of 13500mm (13.5m)
466212	Baris 52 diffuser PRM length of 14000mm (14.0m)
466229	Baris 52 diffuser PRM length of 14500mm (14.5m)
466236	Baris 52 diffuser PRM length of 15000mm (15.0m)
466243	Baris 52 diffuser PRM length of 15500mm (15.5m)
466250	Baris 52 diffuser PRM length of 16000mm (16.0m)
466267	Baris 52 diffuser PRM length of 16500mm (16.5m)
466274	Baris 52 diffuser PRM length of 17000mm (17.0m)
466281	Baris 52 diffuser PRM length of 17500mm (17.5m)
466298	Baris 52 diffuser PRM length of 18000mm (18.0m)
466304	Baris 52 diffuser PRM length of 18500mm (18.5m)
466311	Baris 52 diffuser PRM length of 19000mm (19.0m)
466328	Baris 52 diffuser PRM length of 19500mm (19.5m)
466335	Baris 52 diffuser PRM length of 20000mm (20.0m)
466342	Baris 52 diffuser PRM length of 20500mm (20.5m)
466359	Baris 52 diffuser PRM length of 21000mm (21.0m)
466366	Baris 52 diffuser PRM length of 21500mm (21.5m)
466373	Baris 52 diffuser PRM length of 22000mm (22.0m)
466380	Baris 52 diffuser PRM length of 22500mm (22.5m)
466397	Baris 52 diffuser PRM length of 23000mm (23.0m)
466403	Baris 52 diffuser PRM length of 23500mm (23.5m)
466410	Baris 52 diffuser PRM length of 24000mm (24.0m)
466427	Baris 52 diffuser PRM length of 24500mm (24.5m)
466434	Baris 52 diffuser PRM length of 25000mm (25.0m)

BARIS 52 LED

GENERAL CARD



Baris 52 - linear connector.
straight (318023)



Baris 52 - Dali black power
suspension (318078)

Card creation date: 23 March 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: max 232/2023

