
SOLANTO

GENERAL CARD

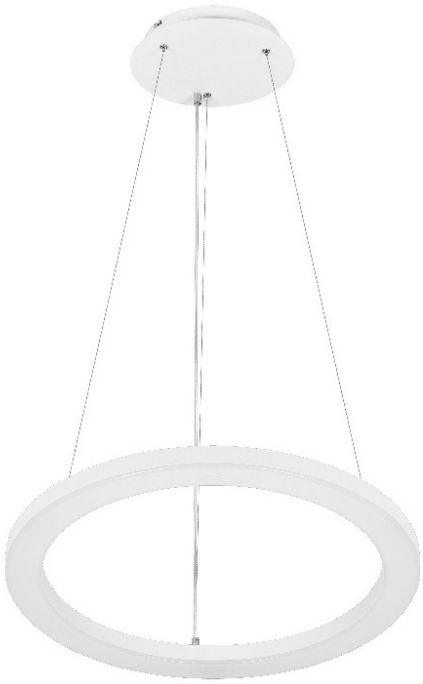

TECHNICAL PARAMETERS

Ingress protection:	IP20
Rated power [W] - range:	30-53
Luminous flux of the luminaire [lm] - range:	1890 - 6100
Colour temperature [K]:	3000; 4000
Colour temperature [K] - range:	2700 - 6500
Frequency [Hz]:	50 - 60
SDCM:	3
Color rendering index (Ra) >:	80
Electrical protection class:	I
Diffuser material:	PMMA; PS
Diffuser type:	OPAL
Colour of the body:	black; white
Dimensions (H/W/T/S) [mm]:	ø602/32; ø602/68; ø900/32; ø900/68; ø1200/32
Mounting version:	surface; suspended
Warranty [years]:	5

CHARACTERISTICS

Solanto – Light That Defines Space.Elegance in the Form of a Ring.
Solanto is an LED fixture that combines minimalist design with functionality, creating a striking focal point in any arrangement. Its timeless ring shape emphasizes the prestige of prestigious interiors such as lobbies, reception areas, galleries, and sales areas, and also blends perfectly into apartments and modern homes.

Why choose Solanto?

• Freedom of arrangement – available in suspended or surface-mounted versions, it allows for adaptation to the character of the space.

• Customizable colors – powder-coated steel body in white, black, or a color individually selected for the project.

• Harmonious light – the opal thermoformed diffuser provides soft, even light distribution, emphasizing the decorative character of the fixture.

• Flexible Multi-LED technology – four flux and power settings in one fixture, simplifying design and reducing the number of indexes.

• Complete mounting system – the pendant version includes a central box and all accessories, ready for installation.

Benefits for designers:

• Flexible design – a single design language across various mounting options.

• Freedom to create lighting arrangements – lamps of different sizes can be suspended at different heights.

• Visual lightness – the delicate rings do not dominate the interior, but are its decoration.

Solanto – more than just lighting. It is a design element.

APPLICATION

SOLANTO is an extremely glamorous pendant or surface mounted luminaire, dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can be also used in apartments and apartments, perfectly fitting into stylish surroundings.

SOLANTO

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

SOLANTO surface

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
30/38/45/53	4000	2820/3570/4200/4980	white		ø602/68	surface	>> 463006
30/38/45/53	3000	2550/3200/3800/4500	white		ø602/68	surface	>> 463013
30/38/45/53	4000	2040/2600/3000/3600	black		ø602/68	surface	>> 463129
30/38/45/53	3000	1890/2400/2800/3330	black		ø602/68	surface	>> 463136
30/38/45/53	3000	1890/2400/2800/3330	black		ø900/68	surface	>> 463372
30/38/45/53	4000	2040/2600/3000/3600	black		ø900/68	surface	>> 463365
30/38/45/53	3000	2550/3200/3800/4500	white		ø900/68	surface	>> 463259
30/38/45/53	4000	2820/3570/4200/4980	white		ø900/68	surface	>> 463242
38	4000	2590	black	yes	ø602/68	surface	>> 463143
38	3000	2400	black	yes	ø602/68	surface	>> 463150
38	3000	3230	white	yes	ø602/68	surface	>> 463037
38	4000	3570	white	yes	ø602/68	surface	>> 463020
38	4000	2590	black	yes	ø900/68	surface	>> 463389
38	4000	3570	white	yes	ø900/68	surface	>> 463266
38	3000	3230	white	yes	ø900/68	surface	>> 463273
38	3000	2400	black	yes	ø900/68	surface	>> 463396
53	4000	3600	black	yes	ø602/68	surface	>> 463167
53	4000	4980	white	yes	ø602/68	surface	>> 463044
53	3000	4500	white	yes	ø602/68	surface	>> 463051
53	3000	3340	black	yes	ø602/68	surface	>> 463174
53	4000	4980	white	yes	ø900/68	surface	>> 463280
53	3000	4500	white	yes	ø900/68	surface	>> 463297
53	4000	3600	black	yes	ø900/68	surface	>> 463402
53	3000	3340	black	yes	ø900/68	surface	>> 463419

SOLANTO suspended

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
30/38/45/53	4000	2820/3570/4200/4980	white		ø602/32	suspended	>> 463068
30/38/45/53	3000	2550/3200/3800/4500	white		ø602/32	suspended	>> 463075
30/38/45/53	4000	2040/2600/3000/3600	black		ø602/32	suspended	>> 463181
30/38/45/53	3000	1890/2400/2800/3330	black		ø602/32	suspended	>> 463198
30/38/45/53	3000	1890/2400/2800/3330	black		ø900/32	suspended	>> 463433
30/38/45/53	4000	2040/2600/3000/3600	black		ø900/32	suspended	>> 463426

SOLANTO

GENERAL CARD

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Mounting version	Index
30/38/45/53	3000	2550/3200/3800/4500	white		ø900/32	suspended	>> 463310
30/38/45/53	4000	2820/3570/4200/4980	white		ø900/32	suspended	>> 463303
38	4000	3570	white	yes	ø602/32	suspended	>> 463082
38	3000	3230	white	yes	ø602/32	suspended	>> 463099
38	4000	2590	black	yes	ø602/32	suspended	>> 463204
38	3000	2400	black	yes	ø602/32	suspended	>> 463211
38	4000	3570	white	yes	ø900/32	suspended	>> 463327
38	3000	3230	white	yes	ø900/32	suspended	>> 463334
38	4000	2590	black	yes	ø900/32	suspended	>> 463440
38	3000	2400	black	yes	ø900/32	suspended	>> 463457
53	3000	3340	black	yes	ø602/32	suspended	>> 463235
53	4000	3600	black	yes	ø602/32	suspended	>> 463228
53	3000	4500	white	yes	ø602/32	suspended	>> 463112
53	4000	4980	white	yes	ø602/32	suspended	>> 463105
53	3000	4500	white	yes	ø900/32	suspended	>> 463358
53	3000	3340	black	yes	ø900/32	suspended	>> 463471
53	4000	3600	black	yes	ø900/32	suspended	>> 463464
53	4000	4980	white	yes	ø900/32	suspended	>> 463341
62	3000	3900	black	yes	ø1200/32	suspended	>> 467974
62	3000	3900	black		ø1200/32	suspended	>> 467936
62	4000	4300	black	yes	ø1200/32	suspended	>> 467967
62	4000	4300	black		ø1200/32	suspended	>> 467929
62	3000	5060	white	yes	ø1200/32	suspended	>> 467998
62	3000	5060	white		ø1200/32	suspended	>> 467950
62	4000	5620	white	yes	ø1200/32	suspended	>> 467981
62	4000	5620	white		ø1200/32	suspended	>> 467943
68		4300	black		ø1200/32	suspended	>> 467370

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 217/2023; 218/2023; 34/2022

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl