


SOLANTO DUO

GENERAL CARD

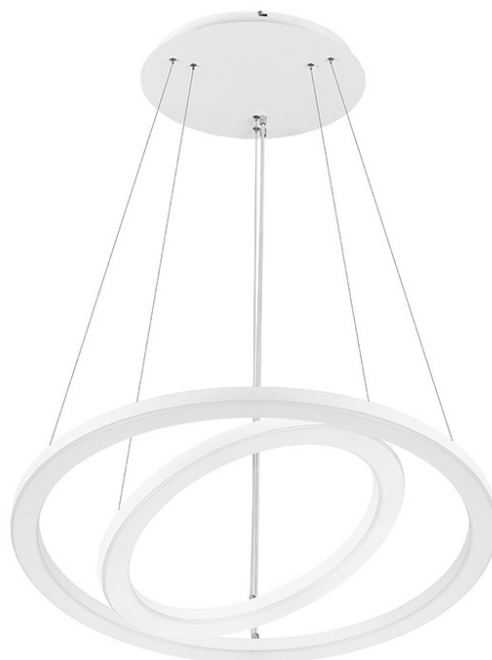

TECHNICAL PARAMETERS

Rated power [W] - range:	26 - 44; 26 – 44; 38; 54
Luminous flux of the luminaire [lm] - range:	1900-3250; 2080-3520; 3050; 3960; 4300
Energy efficiency class:	D; E; F
Electrical protection class:	I
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Diffuser material:	PS
Diffuser type:	OPAL
Diffuser colour:	milky
Colour of the body:	black; white
Dimensions (H/W/T/S) [mm]:	Ø 900/32; Ø 602/32; 900/32;
Ingress protection:	IP20
Mounting version:	suspended
Warranty [years]:	5

CHARACTERISTICS

Suspended LED luminaire composed of two rings (602 and 900mm), allowing for attractive arrangement of representative interiors. The luminaire is made of powder-coated steel in white, black, or any other color which matches the character of the interior. The diffusers made with thermoforming method emphasize the decorative character of the luminaire. The pendant option includes a complete pendant system with a central box. Multi LED version allows to choose from 4 lumens and power settings increasing its versatility and functionality and at the same time reducing the number of indexes to the minimum.

APPLICATION

SOLANTO DUO is a very impressive pendant luminaire dedicated to such interiors as lobbies, receptions, shopping malls, showrooms. It can also be used in flats or apartments and perfectly fits into stylish surroundings.

SOLANTO DUO

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Colour of the body	DIMM DALI	Energy efficiency class	Index
26 - 44	3000	1500-2500	black		F	>> 463730
26 - 44	3000	1900-3250	white		E	>> 463570
26 - 44	4000	1650-2800	black		F	>> 463723
26 - 44	4000	2080-3520	white		D	>> 463563
38	3000	3300	black	yes	F	>> 463778
38	3000	2800	white	yes	E	>> 463617
38	4000	2400	black	yes	F	>> 463761
38	4000	3050	white	yes	D	>> 463600
54	3000	3050	black	yes	F	>> 463792
54	3000	4600	black		F	>> 463754
54	3000	3960	white	yes	E	>> 463631
54	3000	3960	white		E	>> 463594
54	4000	3300	black	yes	F	>> 463785
54	4000	3300	black		F	>> 463747
54	4000	4300	white	yes	D	>> 463624
54	4000	4300	white		D	>> 463587

Card creation date: 24 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 219/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl