


# UV-C STERILON SQUARE

GENERAL CARD

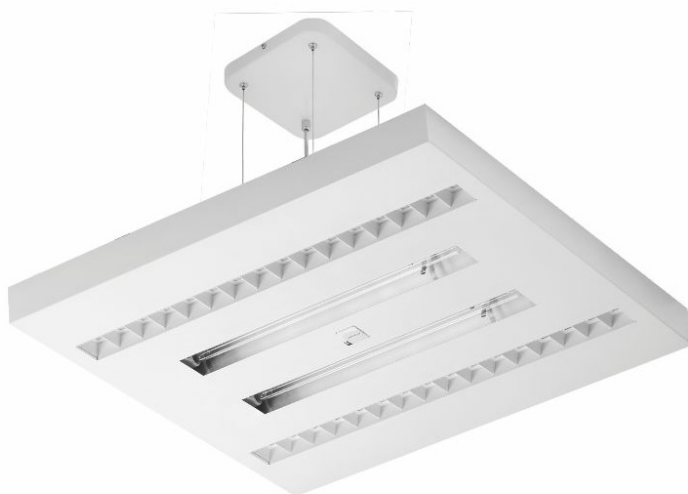

## TECHNICAL PARAMETERS

<b>Nominal power [W]:</b>	92.00; 103.00; 108.00
<b>Supply voltage [V]:</b>	220 - 240
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	4000
<b>Material of the body:</b>	Steel
<b>Colour of the body:</b>	white gloss; white mat
<b>Dimensions (H/W/T/S) [mm]:</b>	595/595/47; 595/595/50;
<b>Ingress protection:</b>	IP20
<b>Mounting version:</b>	recessed; surface; suspended
<b>Version:</b>	inverted RCR motion sensor
<b>Warranty [years]:</b>	2

## CHARACTERISTICS

STERILON SQUARE UV-C luminaires combine the functions of lighting and surface disinfection. Luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms.

## APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities, as well as other spaces requiring general lighting and periodic disinfection.

# UV-C STERILON SQUARE

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Electrical protection class	Supply voltage [V]	Motion sensor	Net weight [kg]	Index
103	9000	white mat	595/595/47	recessed	I	220 - 240	yes	2.960	<a href="#">&gt;&gt; 240232</a>
103	9000	white gloss	595/595/47	recessed	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240225</a>
108	9000	white mat	595/595/47	recessed	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240218</a>
108	9000	white gloss	595/595/47	recessed	I	220 - 240	yes	2.920	<a href="#">&gt;&gt; 240201</a>
92	9000	white gloss	595/595/50	surface	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240300</a>
92	9000	white mat	595/595/50	surface	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240317</a>
103	9000	white gloss	595/595/50	surface	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240324</a>
103	9000	white mat	595/595/50	surface	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240331</a>
108	9000	white gloss	595/595/50	surface	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240348</a>
108	9000	white mat	595/595/50	surface	I	220 - 240	yes	2.800	<a href="#">&gt;&gt; 240355</a>
92	9000	white gloss	595/595/50	suspended	I	220 - 240	yes	4.500	<a href="#">&gt;&gt; 240249</a>
92	9000	white mat	595/595/50	suspended	I	220 - 240	yes	5.840	<a href="#">&gt;&gt; 240256</a>
103	9000	white gloss	595/595/50	suspended	I	220 - 240	yes	4.500	<a href="#">&gt;&gt; 240263</a>
103	9000	white mat	595/595/50	suspended	I	220 - 240	yes	4.500	<a href="#">&gt;&gt; 240270</a>
108	9000	white gloss	595/595/50	suspended	I	220 - 240	yes	4.500	<a href="#">&gt;&gt; 240287</a>
108	9000	white mat	595/595/50	suspended	I	220 - 240	yes	4.500	<a href="#">&gt;&gt; 240294</a>

# UV-C STERILON SQUARE

GENERAL CARD

## ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
243639	UV-C protective glasses



UV-C protective glasses (243639)

Card creation date: 24 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 147/2020; 434/2023; 435/2023; 440/2023