
BARIS 52 LED BRACKET

GENERAL CARD

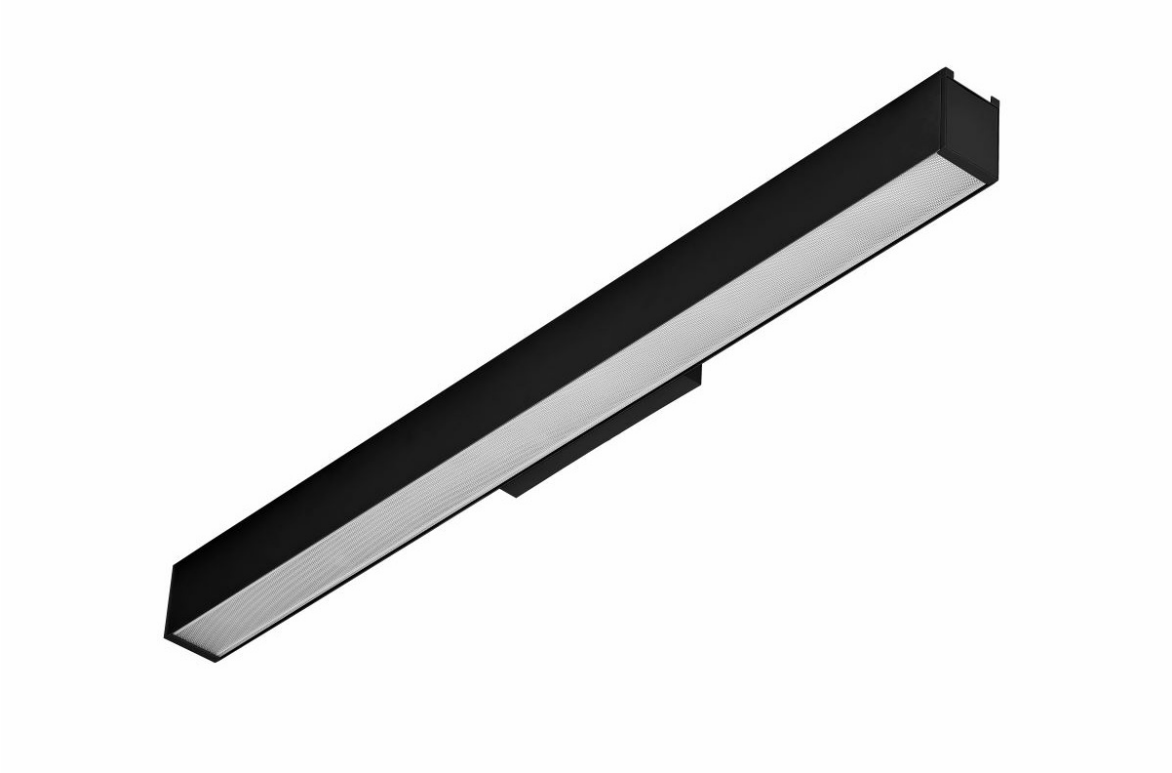

TECHNICAL PARAMETERS

Rated power [W] - range:	13.00-39.00
Luminous flux of the luminaire [lm] - range:	1100-4450
Colour temperature [K]:	3000; 4000
Ingress protection:	IP40; IP44
Impact resistance:	IK06
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser material:	PC
Diffuser type:	OPAL; PRM
Mounting version:	surface, wall mounted
Dimensions (H/W/T/S) [mm]:	82/69/864;
Warranty [years]:	5

CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms.
The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.

BARIS 52 LED BRACKET

GENERAL CARD

AVAILABLE VERSIONS


Click index >>, to see details

BARIS 52 LED BRACKET

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
13	3000	1575	PRM	grey	yes	IP44	82/69/864	>> 674143
13	3000	1575	PRM	white	yes	IP44	82/69/864	>> 675270
13	3000	1575	PRM	black	yes	IP44	82/69/864	>> 674914
13	3000	1575	PRM	grey		IP44	82/69/864	>> 455919
13	3000	1575	PRM	white		IP44	82/69/864	>> 675058
13	3000	1575	PRM	black		IP44	82/69/864	>> 674693
13	3000	1600	OPAL	white	yes	IP44	82/69/864	>> 675263
13	3000	1600	OPAL	black	yes	IP44	82/69/864	>> 674907
13	3000	1600	OPAL	grey		IP44	82/69/864	>> 455896
13	3000	1600	OPAL	white		IP44	82/69/864	>> 675034
13	3000	1600	OPAL	black		IP44	82/69/864	>> 674679
13	3000	1600	OPAL	grey	yes	IP44	82/69/864	>> 674136
13	4000	1650	PRM	white		IP44	82/69/864	>> 675041
13	4000	1650	PRM	black		IP44	82/69/864	>> 674686
13	4000	1650	PRM	grey		IP44	82/69/864	>> 455902
13	4000	1650	PRM	black	yes	IP44	82/69/864	>> 674891
13	4000	1650	PRM	grey	yes	IP44	82/69/864	>> 674129
13	4000	1650	PRM	white	yes	IP44	82/69/864	>> 675256
13	4000	1675	OPAL	grey		IP44	82/69/864	>> 455889
13	4000	1675	OPAL	white		IP44	82/69/864	>> 675027
13	4000	1675	OPAL	black		IP44	82/69/864	>> 674662
13	4000	1675	OPAL	black	yes	IP44	82/69/864	>> 674884
13	4000	1675	OPAL	grey	yes	IP44	82/69/864	>> 674112
13	4000	1675	OPAL	white	yes	IP44	82/69/864	>> 675249
26	3000	3125	PRM	black		IP44	82/69/864	>> 674952
26	3000	3125	PRM	white		IP44	82/69/864	>> 675317
26	3000	3125	PRM	grey		IP44	82/69/864	>> 674181
26	3000	3125	PRM	grey	yes	IP44	82/69/864	>> 674204
26	3000	3125	PRM	white	yes	IP44	82/69/864	>> 675331
26	3000	3125	PRM	black	yes	IP44	82/69/864	>> 674976
26	3000	3200	OPAL	grey		IP44	82/69/864	>> 674174
26	3000	3200	OPAL	black		IP44	82/69/864	>> 674945
26	3000	3200	OPAL	white		IP44	82/69/864	>> 675300

BARIS 52 LED BRACKET

GENERAL CARD

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
26	3000	3200	OPAL	black	yes	IP44	82/69/864	>> 674969
26	3000	3200	OPAL	white	yes	IP44	82/69/864	>> 675324
26	3000	3200	OPAL	grey	yes	IP44	82/69/864	>> 674198
26	4000	3275	PRM	black		IP44	82/69/864	>> 674709
26	4000	3275	PRM	white		IP44	82/69/864	>> 675065
26	4000	3275	PRM	grey	yes	IP44	82/69/864	>> 674167
26	4000	3275	PRM	white	yes	IP44	82/69/864	>> 675294
26	4000	3275	PRM	black	yes	IP44	82/69/864	>> 674938
26	4000	3275	PRM	grey		IP44	82/69/864	>> 455926
26	4000	3350	OPAL	grey	yes	IP44	82/69/864	>> 674150
26	4000	3350	OPAL	black		IP44	82/69/864	>> 674761
26	4000	3350	OPAL	grey		IP44	82/69/864	>> 455988
26	4000	3350	OPAL	black	yes	IP44	82/69/864	>> 674921
26	4000	3350	OPAL	white	yes	IP44	82/69/864	>> 675287
26	4000	3350	OPAL	white		IP44	82/69/864	>> 675126

BARIS 52 LED BRACKET DIR/IND 24/13W

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
24/13	3000	2900/1575	PRM	white		IP40	82/69/864	>> 675393
24/13	3000	2900/1575	PRM	black		IP40	82/69/864	>> 674631
24/13	3000	2900/1575	PRM	grey		IP40	82/69/864	>> 674280
24/13	3000	2900/1575	PRM	black	yes	IP40	82/69/864	>> 674617
24/13	3000	2900/1575	PRM	grey	yes	IP40	82/69/864	>> 674242
24/13	3000	2900/1575	PRM	white	yes	IP40	82/69/864	>> 675379
24/13	3000	2950/1600	OPAL	grey		IP40	82/69/864	>> 674273
24/13	3000	2950/1600	OPAL	white		IP40	82/69/864	>> 675386
24/13	3000	2950/1600	OPAL	black		IP40	82/69/864	>> 674624
24/13	3000	2950/1600	OPAL	black	yes	IP40	82/69/864	>> 674600
24/13	3000	2950/1600	OPAL	white	yes	IP40	82/69/864	>> 675362
24/13	3000	2950/1600	OPAL	grey	yes	IP40	82/69/864	>> 674235
24/13	4000	3025/1650	PRM	black		IP40	82/69/864	>> 674716
24/13	4000	3025/1650	PRM	white		IP40	82/69/864	>> 675072
24/13	4000	3025/1650	PRM	grey		IP40	82/69/864	>> 455933
24/13	4000	3025/1650	PRM	black	yes	IP40	82/69/864	>> 674990
24/13	4000	3025/1650	PRM	white	yes	IP40	82/69/864	>> 675355
24/13	4000	3025/1650	PRM	grey	yes	IP40	82/69/864	>> 674228
24/13	4000	3075/1675	OPAL	grey		IP40	82/69/864	>> 455940
24/13	4000	3075/1675	OPAL	white		IP40	82/69/864	>> 675089

BARIS 52 LED BRACKET


GENERAL CARD

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
24/13	4000	3075/1675	OPAL	black		IP40	82/69/864	>> 674723
24/13	4000	3075/1675	OPAL	black	yes	IP40	82/69/864	>> 674983
24/13	4000	3075/1675	OPAL	white	yes	IP40	82/69/864	>> 675348
24/13	4000	3075/1675	OPAL	grey	yes	IP40	82/69/864	>> 674211


BARIS 52 LED BRACKET

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



BARIS 52 LED KINKIET DIR/IND



BARIS 52 LED KINKIET DIR/IND

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 228/2023; 39/2026

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl

