
BARIS 52 LED CONNECTORS GK

GENERAL CARD

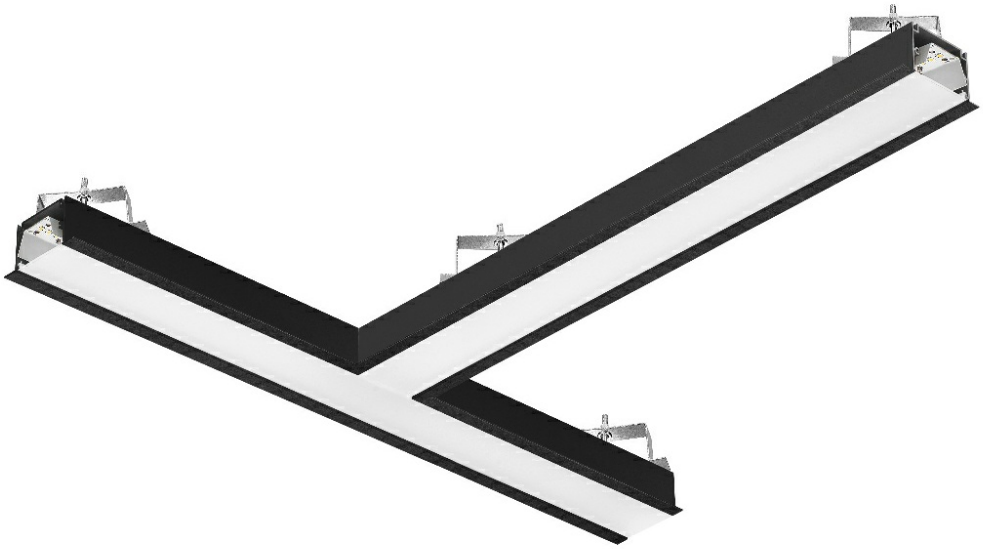

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	18.00; 30.00
Luminous flux [lm]*:	2400; 3975
Energy efficiency class:	D
Colour temperature [K]:	4000
Diffuser type:	OPAL
Dimensions (H/W/T/S) [mm]:	610/610/52; 591/591/52;

CHARACTERISTICS

The key feature of L, T, X connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.
Connectors (T, X, L) are supplied with an OPAL diffuser.

Connectors T, X, L UGR, and PRM diffusers are available on request.

APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.

BARIS 52 LED CONNECTORS GK

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

BARIS 52 LED CONNECTORS GK L connector

Rated power of the luminaire [W]*	Luminous flux [lm]*	DIMM DALI	Diffuser type	Colour of the body	Version	Dimensions (H/W/T/S) [mm]	Index
18	2400	yes	OPAL	grey	L connector	610/610/52	>> 268687
18	2400		OPAL	grey	L connector	610/610/52	>> 268663
30	3975	yes	OPAL	grey	L connector	610/610/52	>> 268694
30	3975		OPAL	grey	L connector	610/610/52	>> 268670

BARIS 52 LED CONNECTORS GK T connector

Rated power of the luminaire [W]*	Luminous flux [lm]*	DIMM DALI	Diffuser type	Colour of the body	Version	Dimensions (H/W/T/S) [mm]	Index
18	2400	yes	OPAL	grey	T connector	591/591/52	>> 268724
18	2400		OPAL	grey	T connector	591/591/52	>> 268700
30	3975	yes	OPAL	grey	T connector	591/591/52	>> 268731
30	3975		OPAL	grey	T connector	591/591/52	>> 268717

BARIS 52 LED CONNECTORS GK X connector

Rated power of the luminaire [W]*	Luminous flux [lm]*	DIMM DALI	Diffuser type	Colour of the body	Version	Dimensions (H/W/T/S) [mm]	Index
18	2400	yes	OPAL	grey	X connector	591/591/52	>> 268762
18	2400		OPAL	grey	X connector	591/591/52	>> 268748
30	3975	yes	OPAL	grey	X connector	591/591/52	>> 268779
30	3975		OPAL	grey	X connector	591/591/52	>> 268755

Card creation date: 19 March 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 343/2023; 42/2026

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl