


# BARIS SQUARE 52 LED

GENERAL CARD

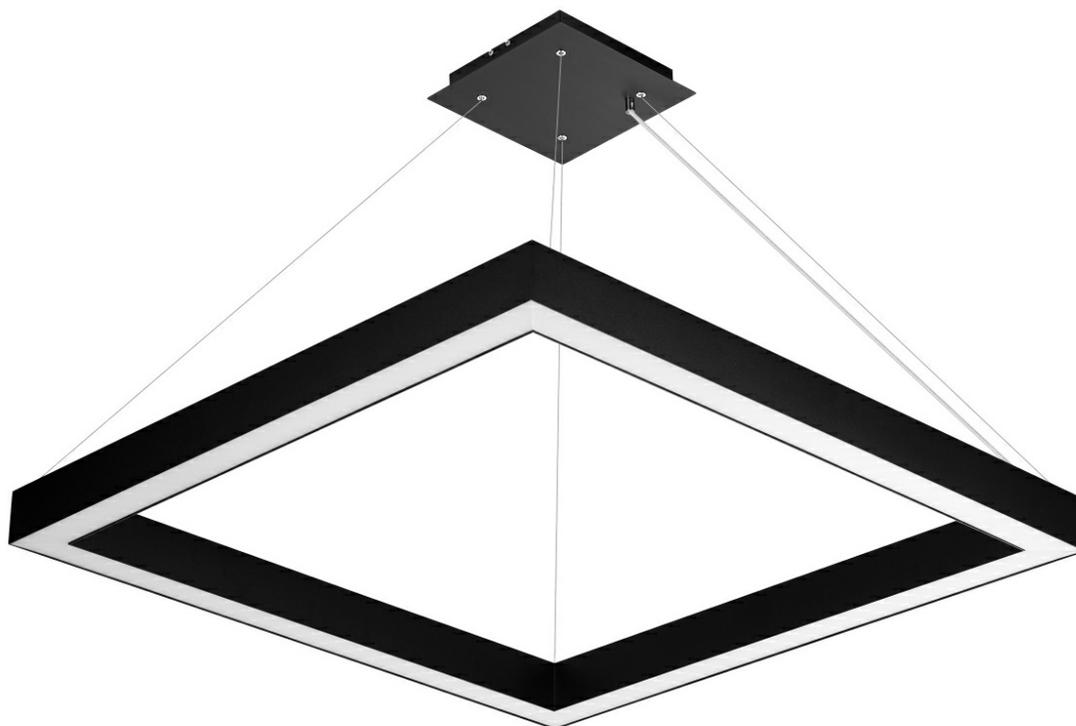

## TECHNICAL PARAMETERS

<b>Light source:</b>	LED module
<b>Rated power of the luminaire [W]*:</b>	32.00 - 145.00
<b>Luminous flux [lm]*:</b>	3850 - 18575
<b>Supply voltage [V]:</b>	220-240
<b>Frequency [Hz]:</b>	50-60
<b>Energy efficiency class:</b>	D
<b>Electrical protection class:</b>	I
<b>Colour temperature [K]:</b>	3000; 4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>Diffuser type:</b>	OPAL; transparent
<b>Diffuser colour:</b>	milky; transparent
<b>Colour of the body:</b>	black; grey; white
<b>Impact resistance:</b>	IK06
<b>Ingress protection:</b>	IP40

## CHARACTERISTICS

Baris Square 52 Led is a striking pendant lamp. Its classic shape fits perfectly into modern design. The lamp body is made of anodized aluminum profile in gray or aluminum profile painted in white or black (other colors available on request). The lamp is offered with two types of lampshade - prismatic or milky. The availability of the lamp in four sizes allows you to design the distribution of lighting in an individually tailored way. Lamps of different sizes and hung at different lengths can create an unlimited number of lighting compositions in the room.

## APPLICATION

The lamp is dedicated for indoor use. It is used as a source of main light in representative rooms, hotels, restaurants, conference rooms. The unique design and energy-saving LED modules also dedicate the lamp for use in modern office buildings or where the requirement is IP40 protection.

# BARIS SQUARE 52 LED

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

### BARIS SQUARE 52 LED 1173/1173/69mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
65	7825	3000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 938818</a>
65	7825	3000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 939013</a>
65	7950	3000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 939112</a>
65	7950	3000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 938917</a>
65	8200	4000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 938023</a>
65	8200	4000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 938610</a>
65	8325	4000	milky	grey	1173/1173/69	<a href="#">&gt;&gt; 939310</a>
65	8325	4000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 938245</a>
65	8325	4000	milky	white	1173/1173/69	<a href="#">&gt;&gt; 939303</a>
65	8325	4000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 938719</a>
116	13950	3000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 938863</a>
116	13950	3000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 939068</a>
116	14200	3000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 938993</a>
116	14200	3000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 939198</a>
116	14600	4000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 938139</a>
116	14600	4000	transparent	black	1173/1173/69	<a href="#">&gt;&gt; 938665</a>
116	14850	4000	milky	grey	1173/1173/69	<a href="#">&gt;&gt; 939297</a>
116	14850	4000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 938597</a>
116	14850	4000	transparent	white	1173/1173/69	<a href="#">&gt;&gt; 939280</a>
116	14850	4000	milky	black	1173/1173/69	<a href="#">&gt;&gt; 938795</a>

### BARIS SQUARE 52 LED 1453/1453/69mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
80	9625	3000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 938825</a>
80	9625	3000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 939020</a>
80	9800	3000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 938924</a>
80	9800	3000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 939129</a>
80	10075	4000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 938030</a>
80	10075	4000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 938627</a>
80	10250	4000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 938726</a>
80	10250	4000	transparent	white	1453/1453/69	<a href="#">&gt;&gt; 939426</a>
80	10250	4000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 938252</a>
80	10250	4000	milky	grey	1453/1453/69	<a href="#">&gt;&gt; 939433</a>
145	17425	3000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 938870</a>

# BARIS SQUARE 52 LED

## GENERAL CARD

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
145	17425	3000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 939075</a>
145	17750	3000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 939174</a>
145	17750	3000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 938979</a>
145	18250	4000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 938672</a>
145	18250	4000	transparent	black	1453/1453/69	<a href="#">&gt;&gt; 938146</a>
145	18575	4000	milky	grey	1453/1453/69	<a href="#">&gt;&gt; 939419</a>
145	18575	4000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 938573</a>
145	18575	4000	milky	black	1453/1453/69	<a href="#">&gt;&gt; 938771</a>
145	18575	4000	milky	white	1453/1453/69	<a href="#">&gt;&gt; 939402</a>

## BARIS SQUARE 52 LED 613/613/69mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
32	3850	3000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938450</a>
32	3850	3000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938474</a>
32	3925	3000	milky	black	613/613/69	<a href="#">&gt;&gt; 938481</a>
32	3925	3000	milky	black	613/613/69	<a href="#">&gt;&gt; 938467</a>
32	4050	4000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938412</a>
32	4050	4000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938009</a>
32	4100	4000	milky	black	613/613/69	<a href="#">&gt;&gt; 938429</a>
32	4100	4000	milky	black	613/613/69	<a href="#">&gt;&gt; 938221</a>
56	6750	3000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938399</a>
56	6750	3000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938382</a>
56	6850	3000	milky	black	613/613/69	<a href="#">&gt;&gt; 938375</a>
56	6850	3000	milky	black	613/613/69	<a href="#">&gt;&gt; 938368</a>
56	7050	4000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938115</a>
56	7050	4000	transparent	black	613/613/69	<a href="#">&gt;&gt; 938283</a>
56	7175	4000	milky	black	613/613/69	<a href="#">&gt;&gt; 938290</a>
56	7175	4000	milky	black	613/613/69	<a href="#">&gt;&gt; 938269</a>
56	7175	4000	transparent	white	613/613/69	<a href="#">&gt;&gt; 939204</a>
56	7175	4000	milky	grey	613/613/69	<a href="#">&gt;&gt; 939211</a>

## BARIS SQUARE 52 LED 893/893/69mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
48	5775	3000	transparent	black	893/893/69	<a href="#">&gt;&gt; 939006</a>
48	5775	3000	transparent	black	893/893/69	<a href="#">&gt;&gt; 938801</a>
48	5875	3000	milky	black	893/893/69	<a href="#">&gt;&gt; 939105</a>
48	5875	3000	milky	black	893/893/69	<a href="#">&gt;&gt; 938900</a>
48	6050	4000	transparent	black	893/893/69	<a href="#">&gt;&gt; 938603</a>
48	6050	4000	transparent	black	893/893/69	<a href="#">&gt;&gt; 938016</a>
48	6150	4000	milky	black	893/893/69	<a href="#">&gt;&gt; 938238</a>

# BARIS SQUARE 52 LED

## GENERAL CARD

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
48	6150	4000	milky	grey	893/893/69	<a href="#">&gt;&gt; 939396</a>
48	6150	4000	transparent	white	893/893/69	<a href="#">&gt;&gt; 939389</a>
48	6150	4000	milky	black	893/893/69	<a href="#">&gt;&gt; 938702</a>
86	10350	3000	transparent	black	893/893/69	<a href="#">&gt;&gt; 939051</a>
86	10350	3000	transparent	black	893/893/69	<a href="#">&gt;&gt; 938856</a>
86	10525	3000	milky	black	893/893/69	<a href="#">&gt;&gt; 939181</a>
86	10525	3000	milky	black	893/893/69	<a href="#">&gt;&gt; 938986</a>
86	10825	4000	transparent	black	893/893/69	<a href="#">&gt;&gt; 938658</a>
86	10825	4000	transparent	black	893/893/69	<a href="#">&gt;&gt; 938122</a>
86	11025	4000	milky	black	893/893/69	<a href="#">&gt;&gt; 938788</a>
86	11025	4000	milky	white	893/893/69	<a href="#">&gt;&gt; 939365</a>
86	11025	4000	milky	black	893/893/69	<a href="#">&gt;&gt; 938580</a>
86	11025	4000	milky	grey	893/893/69	<a href="#">&gt;&gt; 939372</a>

Card creation date: 02 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 210/2023

