
BARIS SQUARE 40 LED

GENERAL CARD

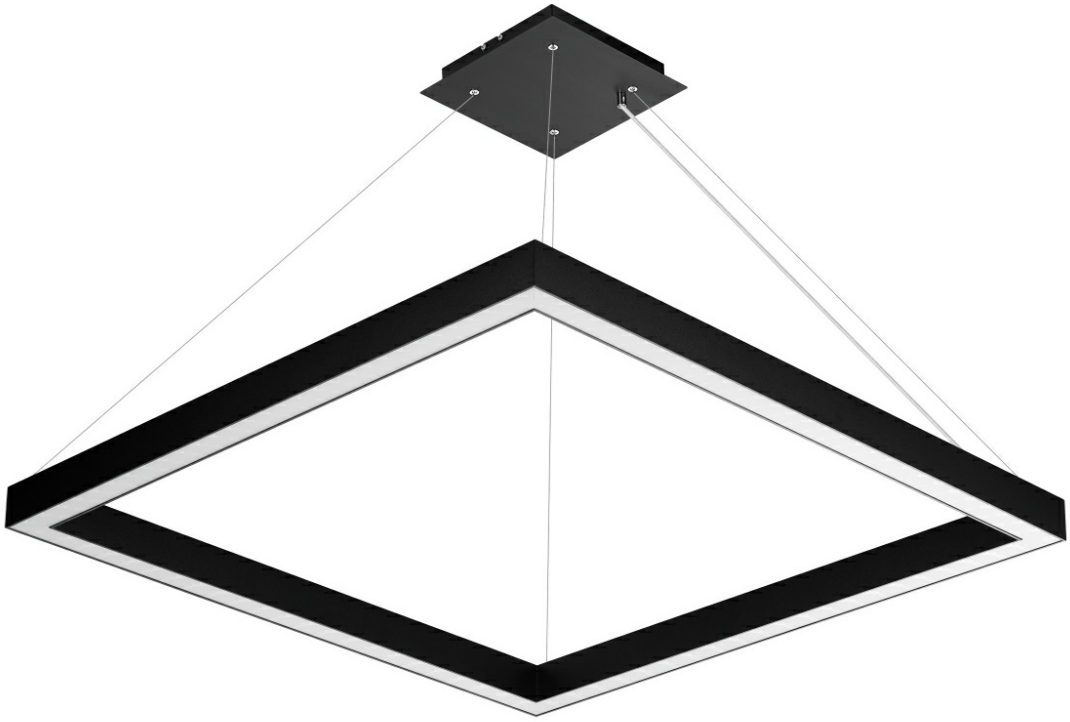

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	32.00 - 116.00
Luminous flux [lm]*:	4275 - 16450
Supply voltage [V]:	220-240
Frequency [Hz]:	50-60
Energy efficiency class:	C; D
Electrical protection class:	I
Colour temperature [K]:	3000; 4000
Diffuser type:	OPAL; transparent
Material of the body:	aluminium
Colour of the body:	black; grey; white
Impact resistance:	IK06
Ingress protection:	IP20

CHARACTERISTICS

Baris Square 40 Led is a striking pendant lamp. Its classic shape fits perfectly into modern design. The lamp body is made of anodized aluminum profile in gray or aluminum profile painted in white or black (other colors available on request). The lamp is offered with two types of lampshade - prismatic or milky. The availability of the lamp in three sizes allows you to design the distribution of lighting in an individually tailored way. Lamps of different sizes and hung at different lengths can create an unlimited number of lighting compositions in the room.

APPLICATION

The lamp is dedicated for indoor use. It is used as a source of main light in representative rooms, hotels, restaurants, conference rooms. Unique design and energy-saving LED modules also dedicate the lamp for use in modern office buildings.

BARIS SQUARE 40 LED

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

Baris SQUARE 40 LED 1162/1162/52mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
65	8675	3000	milky	black		1162/1162/52	>> 938962
65	8675	3000	milky	black	yes	1162/1162/52	>> 939167
65	8850	3000	transparent	black		1162/1162/52	>> 938849
65	8850	3000	transparent	black	yes	1162/1162/52	>> 939044
65	9125	4000	milky	grey		1162/1162/52	>> 939273
65	9125	4000	milky	black		1162/1162/52	>> 938566
65	9125	4000	milky	white		1162/1162/52	>> 939266
65	9125	4000	milky	black	yes	1162/1162/52	>> 938764
65	9225	4000	transparent	black		1162/1162/52	>> 938108
65	9225	4000	transparent	black	yes	1162/1162/52	>> 938641
116	15475	3000	milky	black	yes	1162/1162/52	>> 939150
116	15475	3000	milky	black		1162/1162/52	>> 938955
116	15800	3000	transparent	black		1162/1162/52	>> 938894
116	15800	3000	transparent	black	yes	1162/1162/52	>> 939099
116	16275	4000	milky	grey		1162/1162/52	>> 939259
116	16275	4000	milky	black		1162/1162/52	>> 938559
116	16275	4000	milky	white		1162/1162/52	>> 939242
116	16275	4000	milky	black	yes	1162/1162/52	>> 938757
116	16450	4000	transparent	black	yes	1162/1162/52	>> 938696
116	16450	4000	transparent	black		1162/1162/52	>> 938214

Baris SQUARE 40 LED 602/602/52mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
32	4275	3000	milky	black	yes	602/602/52	>> 938528
32	4275	3000	milky	black		602/602/52	>> 938504
32	4375	3000	transparent	black	yes	602/602/52	>> 938511
32	4375	3000	transparent	black		602/602/52	>> 938498
32	4500	4000	milky	black	yes	602/602/52	>> 938443
32	4500	4000	milky	black		602/602/52	>> 938405
32	4550	4000	transparent	black	yes	602/602/52	>> 938436
32	4550	4000	transparent	black		602/602/52	>> 938085
56	7475	4000	milky	black		602/602/52	>> 938337
56	7475	3000	milky	black	yes	602/602/52	>> 938351

BARIS SQUARE 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
56	7625	3000	transparent	black	yes	602/602/52	>> 938344
56	7625	4000	transparent	black		602/602/52	>> 938320
56	7875	4000	milky	black	yes	602/602/52	>> 938313
56	7875	4000	milky	white		602/602/52	>> 939228
56	7875	4000	milky	black		602/602/52	>> 938276
56	7875	4000	milky	grey		602/602/52	>> 939235
56	7950	4000	transparent	black	yes	602/602/52	>> 938306
56	7950	4000	transparent	black		602/602/52	>> 938191

Baris SQUARE 40 LED 882/882/52mm

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Diffuser colour	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
48	6400	3000	milky	black	yes	882/882/52	>> 939143
48	6400	3000	milky	black		882/882/52	>> 938948
48	6550	3000	transparent	black	yes	882/882/52	>> 939037
48	6550	3000	transparent	black		882/882/52	>> 938832
48	6750	4000	milky	white		882/882/52	>> 939341
48	6750	4000	milky	grey		882/882/52	>> 939358
48	6750	4000	milky	black		882/882/52	>> 938542
48	6750	4000	milky	black	yes	882/882/52	>> 938740
48	6800	4000	transparent	black	yes	882/882/52	>> 938634
48	6800	4000	transparent	black		882/882/52	>> 938092
86	11475	3000	milky	black	yes	882/882/52	>> 939136
86	11475	3000	milky	black		882/882/52	>> 938931
86	11725	3000	transparent	black	yes	882/882/52	>> 939082
86	11725	3000	transparent	black		882/882/52	>> 938887
86	12075	4000	milky	black	yes	882/882/52	>> 938733
86	12075	4000	milky	white		882/882/52	>> 939327
86	12075	4000	milky	black		882/882/52	>> 938535
86	12075	4000	milky	grey		882/882/52	>> 939334
86	12200	4000	transparent	black	yes	882/882/52	>> 938689
86	12200	4000	transparent	black		882/882/52	>> 938207



