

# TIARA LED CLUE IOT

GENERAL CARD



## TECHNICAL PARAMETERS

<b>Rated power of the luminaire [W]*:</b>	54.00; 78.00; 184.00
<b>Luminous flux [lm]*:</b>	8475; 11500; 20200
<b>Energy efficiency class:</b>	B - E
<b>Electrical protection class:</b>	I; II
<b>Colour temperature [K]:</b>	4000
<b>Diffuser material:</b>	toughened glass

## CHARACTERISTICS

TIARA LED is a new generation of road luminaires dedicated to LED technology. Designed from scratch, it introduces new solutions to improve light distribution and temperature balance, thus introducing new standards in road lighting. The luminaire uses directional lenticular matrices made of PMMA or PC, thanks to which it is possible to obtain a light distribution meeting the lighting classes defined in the PN-EN 13201: 2007 standard. Components of renowned manufacturers and new LED they have an effect on very high luminous efficiency - close to 130 lm / W. The luminaire uses a solution that integrates the diffuser with the LED module. The body and the handle are made of a pressure cast aluminum. The whole has been powder coated in gray (RAL9006). The luminaire design allows for tool-free access to the electrical equipment compartment. The luminaire is characterized by a very high degree of protection IP66 and resistance to mechanical impacts IK09 (vandal resistance). The fitting has many improvements to facilitate and accelerate assembly: an independent body with an ergonomic suspension system of the light module; handle adjustable in increments: -5° to +15° (peak to pole); -15° to +5° (side to boom). Lamp compatible with modern control systems (additional NEMA and ZHAGA connectors).

Standard equipment: protection against accidental overheating of the NTC fitting; overvoltage protection up to 10kV; fully programmable DALI driver; hardened glass.

## APPLICATION

Streetlight fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.

# TIARA LED CLUE IOT

GENERAL CARD

## AVAILABLE VERSIONS




Click index >>, to see details

Rated power of the luminaire [W]*	Luminous flux [lm]*	Surge protection [kV]	Index
54	8475	10	<a href="#">&gt;&gt; 920332</a>
54	8475	10	<a href="#">&gt;&gt; 917035</a>
78	11500	10	<a href="#">&gt;&gt; 956973</a>
184	20200	10	<a href="#">&gt;&gt; 956980</a>


# TIARA LED CLUE IOT

## GENERAL CARD


### LUMINOUS INTENSITY DISTRIB. CURVE




ASM2




ASN




ASW




PL1




PP1




RM10




RM11




RM11+




RM12




RM13




RM14




RM15




RM16



RM17




RM18+




RM19

# TIARA LED CLUE IOT


## GENERAL CARD




RM3




RM4




RM5




RM6




RM7




RM8+




RM9




RMW




RN1




RN2




RP




RW10




RW2



RW3




RW4




RW5

# TIARA LED CLUE IOT


## GENERAL CARD




RW6



RW7



RW8

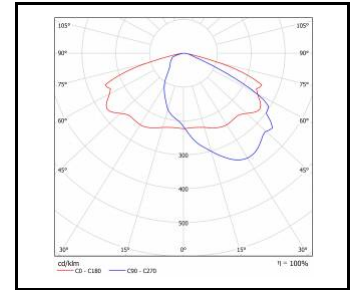

RW9

# TIARA LED CLUE IOT

GENERAL CARD

## ACCESSORIES AVAILABLE

index	Name
	wall holder (galvanized)
	wall holder (grey)
830UL109	Module CLUE CITY GATEWAY IP67 GSM
UL00184	mounting grip 78 mm TIARA LED



wall holder (galvanized) (314049)



wall holder (grey) (314056)




mounting grip 78 mm TIARA LED (UL00184)

Card creation date: 13 November 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 448/2023; 62/2023; 66/2020