
CONTRA LED

GENERAL CARD

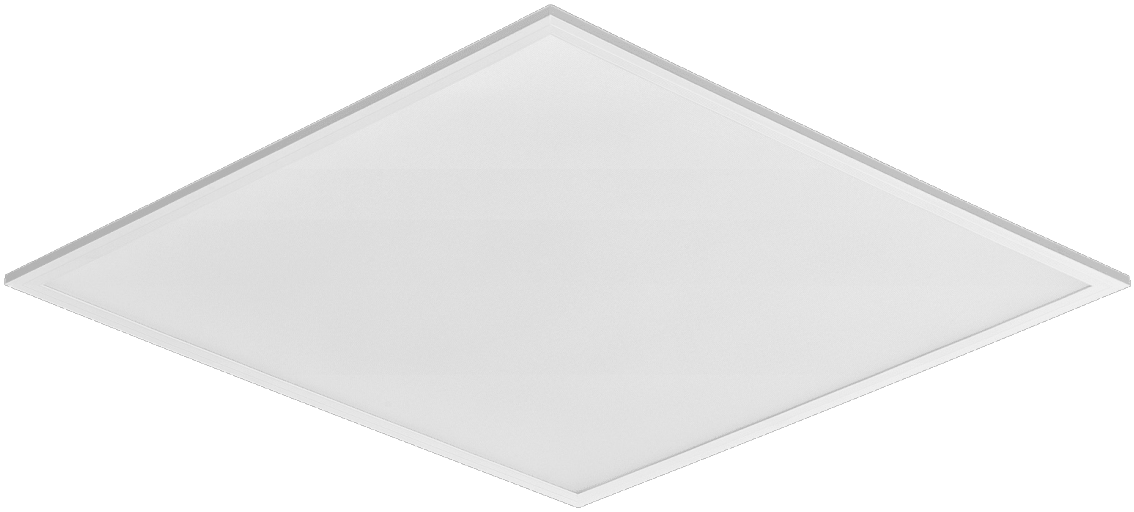

TECHNICAL PARAMETERS

Ingress protection:	IP40/IP20; IP44/IP20
Impact resistance:	IK06
Rated power of the luminaire [W]*:	24.00 - 36.00
Luminous flux [lm]*:	3200 - 5000
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Electrical protection class:	II
Material of the body:	coated aluminium
Diffuser type:	PRM; matt
Mounting version:	recessed, surface, suspended
Dimensions (H/W/T/S) [mm]:	595/595/30; 1195/295/30;
SDCM:	2; 3

CHARACTERISTICS

Contra LED versatile LED panel characterised by its low, slim profile and elegant design. Adapted for flush-mounted installation in modular ceilings, surface-mounted or suspended using an additional frame (available as an accessory). Luminaire with integrated energy-saving LED module, made of white painted aluminium profile, equipped with structured multi-layer PS MAT or PRM shade for perfect light diffusion.

APPLICATION

The luminaire is intended for indoor use in office (offices, conference rooms) or representative use (hotels, restaurants); illumination of public facilities, including hospitals, educational facilities, offices, halls, garages, passageways, warehouses, shops, as well as in the food industry and food-related retail and service facilities. The unique design and excellent light performance enable CONTRA LED to be used as the main source of light, also for work that requires visual focus. The lamp is suitable for both new applications and the replacement of traditional T8 and T5 luminaires with energy-efficient LED solutions.

CONTRA LED

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

CONTRA LED IP40/IP20

Rated power of the luminaire [W]*	Luminous flux [lm]*	Emergency luminous flux [lm]*	Diffuser type	UGR (4H8H)	DIMM DALI	Motion sensor	Emergency lighting [h]	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
24	3200		matt					IP40/IP20	1195/295/30	>> 374548
24	3200		matt			yes		IP40/IP20	595/595/30	>> 761386
24	3200		matt		yes			IP40/IP20	595/595/30	>> 374579
24	3200		matt			yes		IP40/IP20	1195/295/30	>> 761416
24	3200		matt		yes			IP40/IP20	1195/295/30	>> 374609
24	3400		PRM	<19				IP40/IP20	595/595/30	>> 375552
24	3400		PRM	<19				IP40/IP20	1195/295/30	>> 375958
31	4300	250	matt				3	IP40/IP20	595/595/30	>> 761447
31	4300		matt					IP40/IP20	595/595/30	>> 374500
31	4300		matt			yes		IP40/IP20	1195/295/30	>> 761355
31	4300		matt			yes		IP40/IP20	595/595/30	>> 761379
31	4300		matt					IP40/IP20	1195/295/30	>> 374555
31	4300		matt		yes			IP40/IP20	595/595/30	>> 374562
31	4300		matt		yes			IP40/IP20	1195/295/30	>> 374616
31	4500		PRM	<19				IP40/IP20	1195/295/30	>> 375941
31	4500		PRM	<19				IP40/IP20	595/595/30	>> 374524
31	4500		PRM	<19		yes		IP40/IP20	595/595/30	>> 761362
31	4500		PRM	<19	yes			IP40/IP20	595/595/30	>> 374586
31	4500		PRM	<19	yes			IP40/IP20	1195/295/30	>> 375972
36	5000		matt		yes			IP40/IP20	595/595/30	>> 374593
36	5000		matt			yes		IP40/IP20	595/595/30	>> 761393
36	5000		matt					IP40/IP20	595/595/30	>> 374531

CONTRA LED IP44/IP20

Rated power of the luminaire [W]*	Luminous flux [lm]*	Emergency luminous flux [lm]*	Diffuser type	UGR (4H8H)	DIMM DALI	Motion sensor	Emergency lighting [h]	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
24	3200		matt					IP44/IP20	1195/295/30	>> 375378
24	3200		matt		yes			IP44/IP20	595/595/30	>> 375460
24	3200		matt					IP44/IP20	595/595/30	>> 375453
24	3200		matt		yes			IP44/IP20	1195/295/30	>> 375385
31	4300		matt		yes			IP44/IP20	595/595/30	>> 375484
31	4300		matt					IP44/IP20	595/595/30	>> 375477
31	4300		matt		yes			IP44/IP20	1195/295/30	>> 375446
31	4300		matt					IP44/IP20	1195/295/30	>> 375392

CONTRA LED

GENERAL CARD


Rated power of the luminaire [W]*	Luminous flux [lm]*	Emergency luminous flux [lm]*	Diffuser type	UGR (4H8H)	DIMM DALI	Motion sensor	Emergency lighting [h]	Ingress protection	Dimensions (H/W/T/S) [mm]	Index
36	5000		matt					IP44/IP20	595/595/30	>> 375491
36	5000		matt		yes			IP44/IP20	595/595/30	>> 375545

CONTRA LED


GENERAL CARD

ACCESSORIES AVAILABLE


index	Name
998966	Frame steel white structure RAL9016 600x600 SM "well effect"
374708	CONTRA LED surface-mounted frame CLICK 1200x300x65mm
374715	CONTRA LED surface-mounted frame CLICK 600x600x65mm
374845	Frame adapter KG 635x635 WHITE
374852	Frame adapter KG 1235x335 WHITE
374692	CONTRA LED suspension system 1200x300
374739	CONTRA LED - suspension system 1200x300 DALI
374685	CONTRA LED suspension system 600x600
374722	CONTRA LED suspension system 600x600 DALI
374838	CONTRA LED MOUNTING CLIPS IN KG (4PCS)
761294	Emergency module 2W/10-50V Li-ION EMG-A-Li-2L 3h 3.6V 2.5Ah AT - CONTRA (GKO)




Frame steel white structure RAL9016 600x600 SM "well effect" (998966)



CONTRA LED surface-mounted frame CLICK 1200x300x65mm (374708)



CONTRA LED surface-mounted frame CLICK 600x600x65mm (374715)



Frame adapter KG 635x635 WHITE (374845)



CONTRA LED suspension system 1200x300 (374692)



CONTRA LED suspension system 600x600 (374685)

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 104/2024; 26/2025; 34/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl