


TERRANO P

GENERAL CARD

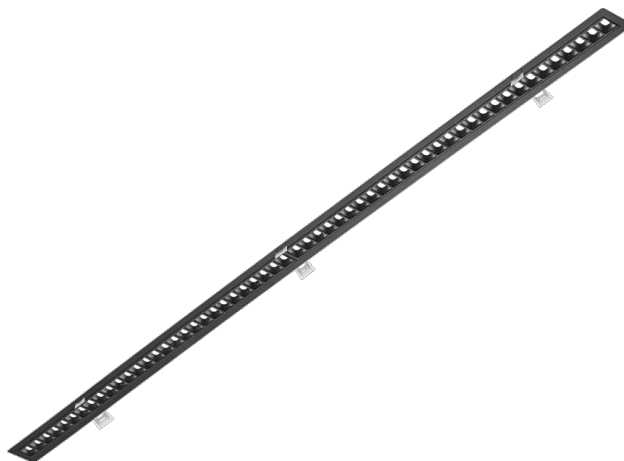

TECHNICAL PARAMETERS

Ingress protection:	IP20
Rated power of the luminaire [W]*:	9.00 - 43.00
Luminous flux [lm]*:	1050 - 6300
Colour temperature [K]:	3000; 4000
Color rendering index (Ra) >:	80
SDCM:	3
Material of the body:	powder coated steel
Colour of the body:	black; white
Diffuser material:	PC
Diffuser type:	matrix led
Mounting version:	recessed
Dimensions (H/W/T/S) [mm]:	566/40/34; 1117/40/34;

CHARACTERISTICS

The new linear luminaire in the form of a compact louver with LEDs and focusing lenses allows extremely effective glare reduction (UGR of 12-19). Terrano luminaires are characterised by excellent performance and a number of conveniences. These include, above all, express installation in plasterboard and modular ceilings. The Terrano P lamp - a plastic louver in a slim steel housing - is available in two colour temperatures of 3000 K and 4000 K and in two colour versions: white and black.

APPLICATION

Terrano P is suitable for installation in plasterboard and modular ceilings and is ideal as general lighting, but it can also be used to spotlight selected elements of a space. Terrano P can be used both as an eye-catching feature in modern settings where lighting plays a key role and to complement subtle, minimalist spaces.

TERRANO P

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Colour of the body	Beam angle [°]	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
9	1050	3000	black	60		566/40/34	>> 946462
9	1100	4000	black	60		566/40/34	>> 946370
9	1150	3000	white	60		566/40/34	>> 946288
9	1200	4000	white	60		566/40/34	>> 946141
13	1750	3000	black	60		566/40/34	>> 946479
13	1850	4000	black	60		566/40/34	>> 946387
13	1950	3000	white	60		566/40/34	>> 946295
13	2050	4000	white	60		566/40/34	>> 946158
18	2300	3000	black	60		566/40/34	>> 946240
18	2300	3000	black	60	yes	566/40/34	>> 946486
18	2400	4000	black	60		566/40/34	>> 946004
18	2400	4000	black	60	yes	566/40/34	>> 946394
18	2500	3000	white	60		566/40/34	>> 946264
18	2500	3000	white	60	yes	566/40/34	>> 946301
18	2650	4000	white	60	yes	566/40/34	>> 946165
18	2650	4000	white	60		566/40/34	>> 946042
23	2850	4000	black	60		566/40/34	>> 946400
23	2850	3000	black	60	yes	566/40/34	>> 577963
23	2850	4000	black	60	yes	566/40/34	>> 577949
23	2850	3000	black	60		566/40/34	>> 946493
23	2950	3000	white	60		566/40/34	>> 946318
23	2950	3000	white	60	yes	566/40/34	>> 577925
23	3000	4000	white	70		566/40/34	>> 420825
23	3150	4000	white	60	yes	566/40/34	>> 577901
23	3150	4000	white	60		566/40/34	>> 946172
18	2300	3000	black	60		1117/40/34	>> 946257
18	2400	4000	black	60		1117/40/34	>> 946011
18	2500	3000	white	60		1117/40/34	>> 946271
18	2650	4000	white	60		1117/40/34	>> 946059
23	2700	3000	black	60		1117/40/34	>> 946530
23	2700	3000	black	60	yes	1117/40/34	>> 577970
23	2850	4000	black	60	yes	1117/40/34	>> 577956
23	2850	4000	black	60		1117/40/34	>> 946448
23	2950	3000	white	60		1117/40/34	>> 946356
23	2950	3000	white	60	yes	1117/40/34	>> 577932

TERRANO P

GENERAL CARD

23	3150	4000	white	60	yes	1117/40/34	>> 577918
23	3150	4000	white	60		1117/40/34	>> 946219
29	3700	3000	black	60		1117/40/34	>> 946509
29	3900	4000	black	60		1117/40/34	>> 946417
29	4100	3000	white	60		1117/40/34	>> 946325
29	4300	4000	white	60		1117/40/34	>> 946189
34	4100	3000	black	60		1117/40/34	>> 946516
34	4400	4000	black	60		1117/40/34	>> 946424
34	4600	3000	white	60		1117/40/34	>> 946332
34	4800	4000	white	60		1117/40/34	>> 946196
36	4600	3000	white	60	yes	1117/40/34	>> 946363
36	4600	4000	black	60	yes	1117/40/34	>> 946547
36	4800	4000	black	60	yes	1117/40/34	>> 946455
36	5000	4000	white	60	yes	1117/40/34	>> 946226
43	5400	3000	black	60		1117/40/34	>> 946523
43	5700	4000	black	60		1117/40/34	>> 946431
43	5900	3000	white	60		1117/40/34	>> 946349
43	6000	4000	white	70		1117/40/34	>> 420818
43	6300	4000	white	60		1117/40/34	>> 946202

Card creation date: 25 March 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 65/2025



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl

