

# CONTRA PLUS LED

GENERAL CARD



## TECHNICAL PARAMETERS

<b>Rated power [W] - range:</b>	26-39
<b>Luminous flux of the luminaire [lm] - range:</b>	3200-4900; 3600-5500
<b>Colour temperature [K] - range:</b>	4000/3000
<b>Ingress protection:</b>	IP40/IP20; IP44/IP20
<b>Impact resistance:</b>	IK03
<b>Colour rendering index:</b>	>80
<b>Electrical protection class:</b>	II
<b>Colour of the body:</b>	white
<b>Diffuser material:</b>	PMMA
<b>Diffuser type:</b>	MAT; PRM
<b>Mounting version:</b>	podtynkowy, natynkowy z akcesorium, zwieszany z akcesorium; recessed. surface-mounted with accessory, suspended with accessories
<b>Dimensions (H/W/T/S) [mm]:</b>	595/595/39; 1195/295/39;
<b>SDCM:</b>	≤ 2 (4000K), SDCM ≤ 1 (3000K)

## CHARACTERISTICS

Contra Plus LED versatile LED panel characterised by its low, slim profile and elegant design. Adapted for flush-mounted installation in modular ceilings, surface-mounted or suspended using an additional frame (available as an accessory). Luminaire with integrated energy-saving LED module, made of white painted aluminium profile, equipped with structured multi-layer PMMA MAT or PRM shade for perfect light diffusion.

## APPLICATION

The luminaire is intended for indoor use in office (offices, conference rooms) or representative use (hotels, restaurants); illumination of public facilities, including hospitals, educational facilities, offices, halls, garages, passageways, warehouses, shops, as well as in the food industry and food-related retail and service facilities. The unique design and excellent light performance enable CONTRA PLUS LED to be used as the main source of light, also for work that requires visual focus. The lamp is suitable for both new applications and the replacement of traditional T8 and T5 luminaires with energy-efficient LED solutions.

# CONTRA PLUS LED

## GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

### CONTRA PLUS LED IP40/IP20

Rated power [W] - range	Colour temperature [K] - range	Luminous flux of the luminaire [lm] - range	Diffuser type	UGR (4H8H)	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
26-39	4000/3000	3200-4900	MAT			1195/295/39	<a href="#">&gt;&gt; 374777</a>
26-39	4000/3000	3200-4900	MAT		yes	1195/295/39	<a href="#">&gt;&gt; 374814</a>
26-39	4000/3000	3200-4900	MAT			595/595/39	<a href="#">&gt;&gt; 374753</a>
26-39	4000/3000	3200-4900	MAT		yes	595/595/39	<a href="#">&gt;&gt; 374791</a>
26-39	4000/3000	3600-5500	PRM	<19		1195/295/39	<a href="#">&gt;&gt; 374784</a>
26-39	4000/3000	3600-5500	PRM	<19	yes	1195/295/39	<a href="#">&gt;&gt; 374821</a>
26-39	4000/3000	3600-5500	PRM	<19		595/595/39	<a href="#">&gt;&gt; 374760</a>
26-39	4000/3000	3600-5500	PRM	<19	yes	595/595/39	<a href="#">&gt;&gt; 374807</a>

### CONTRA PLUS LED IP44/IP20


Rated power [W] - range	Colour temperature [K] - range	Luminous flux of the luminaire [lm] - range	Diffuser type	UGR (4H8H)	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
26-39	4000/3000	3200-4900	MAT			1195/295/39	<a href="#">&gt;&gt; 375651</a>
26-39	4000/3000	3200-4900	MAT		yes	1195/295/39	<a href="#">&gt;&gt; 375668</a>
26-39	4000/3000	3200-4900	MAT			595/595/39	<a href="#">&gt;&gt; 375682</a>
26-39	4000/3000	3200-4900	MAT		yes	595/595/39	<a href="#">&gt;&gt; 375699</a>

# CONTRA PLUS LED


GENERAL CARD

## ACCESSORIES AVAILABLE


index	Name
<a href="#">374708</a>	CONTRA LED surface-mounted frame CLICK 1200x300x65mm
<a href="#">999543</a>	Plasterboard recessing kit 630x630 white (steel version)
<a href="#">998966</a>	Frame steel white structure RAL9016 600x600 SM "well effect"
<a href="#">374715</a>	CONTRA LED surface-mounted frame CLICK 600x600x65mm
<a href="#">374845</a>	Frame adapter KG 635x635 WHITE
374852	Frame adapter KG 1235x335 WHITE
<a href="#">374692</a>	CONTRA LED suspension system 1200x300
374739	CONTRA LED - suspension system 1200x300 DALI
<a href="#">374685</a>	CONTRA LED suspension system 600x600
374722	CONTRA LED suspension system 600x600 DALI
374838	CONTRA LED MOUNTING CLIPS IN KG (4PCS)




CONTRA LED surface-mounted frame  
CLICK 1200x300x65mm (374708)

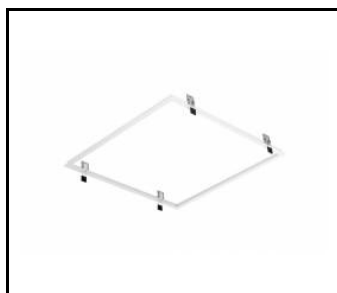

Plasterboard recessing kit 630x630  
white (steel version) (999543)

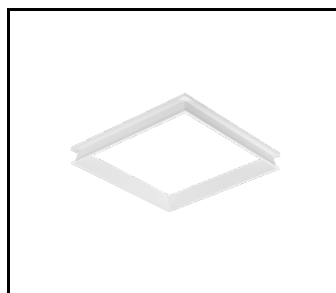

Frame steel white structure RAL9016  
600x600 SM "well effect" (998966)

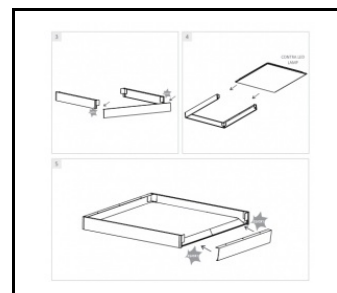

CONTRA LED surface-mounted frame  
CLICK 600x600x65mm (374715)




CONTRA LED suspension system  
1200x300 (374692)

# CONTRA PLUS LED

---

GENERAL CARD

Mounting version:  
recessed

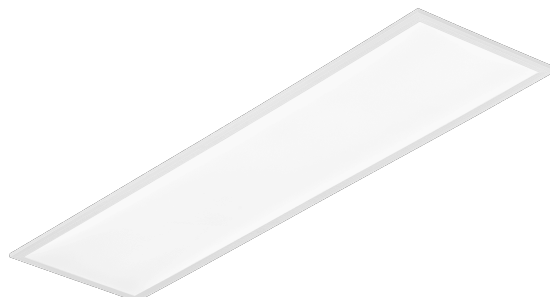

Frame for surface  
mounting



Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 105/2024

---

Frame for surface  
mounting



Mounting version:  
suspended

