

ILUMI GROUND

GENERAL CARD



TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	5.00; 17.00; 30.00
Colour temperature [K]:	3000; 4000
Luminous flux [lm]*:	500 - 4060
Ingress protection:	IP67
Impact resistance:	IK10
Colour rendering index:	80
Material of the body:	aluminium
Colour of the body:	silver
Beam angle [°]:	10; 30
Working temperature [°C]:	from -20 to +55
Dimensions (H/W/T/S) [mm]:	f192; f148; f216.5;

CHARACTERISTICS

The Ground series has been designed to achieve the best visual effect by having no screws on the front. Made from the highest quality materials and modern CREE LEDs. The Ground luminaire can be used to illuminate a wide range of locations and facilities such as:

- * parks,
- * gardens,
- * terraces,
- * squares,
- * premises,
- * plants.

APPLICATION

Ilumi Ground's outdoor ground-mounted luminaires can be used to light and illuminate a wide range of places and objects, including but not limited to:

- * parks,
- * gardens,
- * monuments,
- * squares,
- * fountains.

ILUMI GROUND

GENERAL CARD

AVAILABLE VERSIONS




Click index >>, to see details

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Version	Beam angle [°]	Dimensions (H/W/T/S) [mm]	Index
5	3000	500	XS	10	fi92	>> 377204
5	4000	550	XS	10	fi92	>> 377211
17	3000	1390	S	10	fi148	>> 377228
17	3000	1390	S	30	fi148	>> 377235
17	4000	1450	S	10	fi148	>> 377242
17	4000	1450	S	30	fi148	>> 377259
30	3000	3700	M	10	fi216.5	>> 377266
30	3000	3700	M	30	fi216.5	>> 377273
30	4000	4060	M	10	fi216.5	>> 377280
30	4000	4060	M	30	fi216.5	>> 377297


ILUMI GROUND

GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE

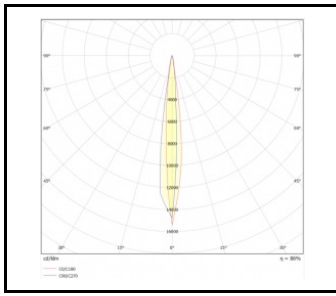


10°

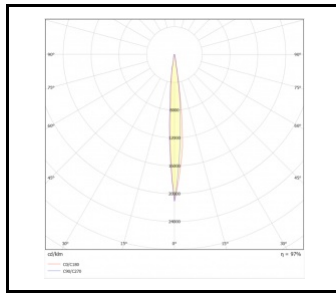


10°

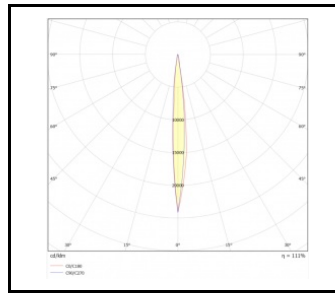


10°

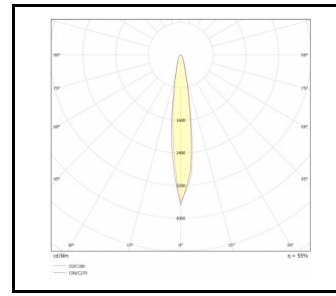


10°

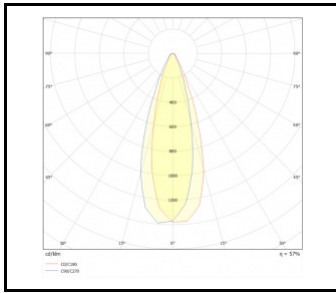

30°

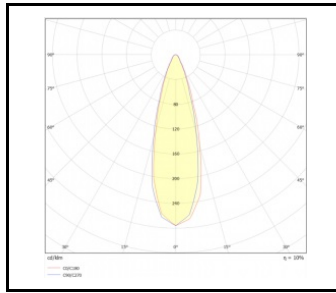

30°

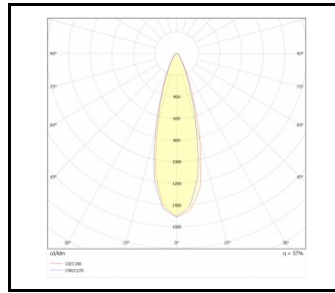


30°


ILUMI GROUND

GENERAL CARD

Ilumi Ground XS

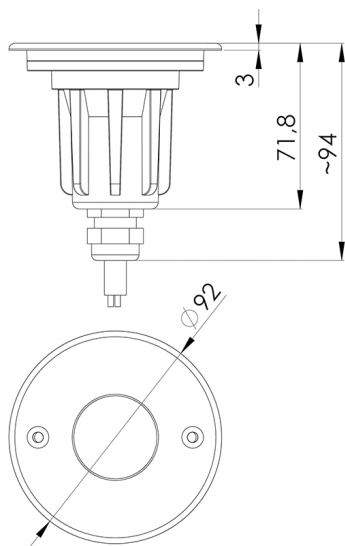

Ilumi Ground S

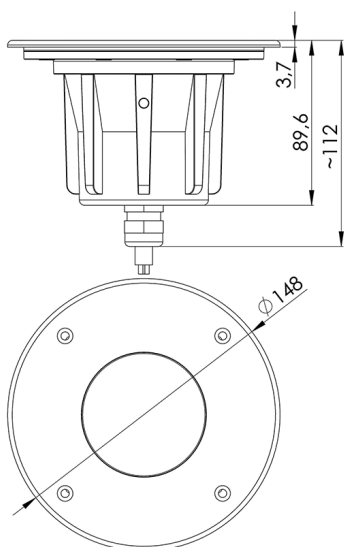

Card creation date: 25 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 80/2024

Ilumi Ground M

