GENERAL CARD





TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	17.00; 30.00	
Colour temperature [K]:	3000; 4000	
Luminous flux [lm]*:	1390 - 3550	
Ingress protection:	IP67	
Impact resistance:	IK10	
Colour rendering index:	80	
Material of the body:	aluminium	
Colour of the body:	silver	
Beam angle [°]:	10; 30	
Working temperature [°C]:	from -20 to +55	
Dimensions (H/W/T/S) [mm]:	fi148; fi216.5;	

CHARACTERISTICS

The llumi Ground series was designed for the most demanding customers looking for customised and economical solutions. The body of the luminaire is made of cast aluminium, which has enabled a significant reduction in weight and price. A mounting box is included.

APPLICATION

The luminaires are ideal for illuminating garden or park spaces. Due to their lightweight construction, they are easy to install on external walls. The llumi Ground luminaire can be used to illuminate a wide range of spaces and objects, such as parks, gardens, terraces, squares, premises and plants.



GENERAL CARD

AVAILABLE VERSIONS

Rated power of the luminaire $\left[W\right]^{*}$

17


Colour temperature [K]Luminous flux [lm]*VersionBeam angle [°]Dimensions (H/W/T/S) [mm]Index30001390S10fi148>> 37722830001390S30fi148>> 377235

17	3000	1390	S	30	fi148	<u>>> 377235</u>
17	4000	1450	S	10	fi148	<u>>> 377242</u>
17	4000	1450	S	30	fi148	<u>>> 377259</u>
30	3000	3200	М	10	fi216.5	<u>>> 377266</u>
30	3000	3200	М	30	fi216.5	<u>>> 377273</u>
30	4000	3550	М	10	fi216.5	<u>>> 377280</u>
30	4000	3550	М	30	fi216.5	<u>>> 377297</u>



GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE

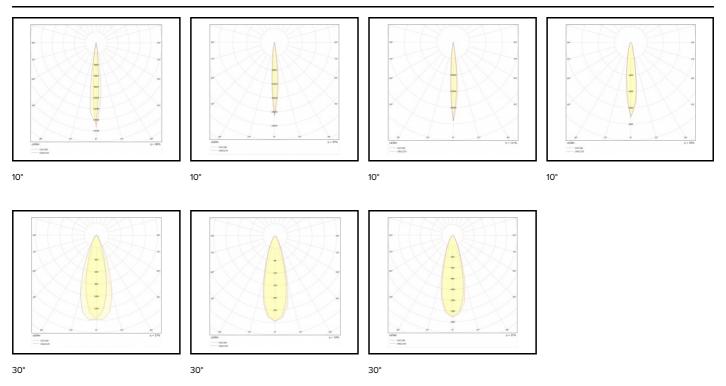




GENERAL CARD

Ilumi Ground XS



llumi Ground S



Card creation date: 22 May 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

Certificate CE - Nr: 55/2025

This product is a subject to electric and electronic waste equipment regulations (WEEE).



Lena Lighting S.A. ul. Kórnicka 52, 63-000 Środa Wielkopolska tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl

llumi Ground M

