



## TECHNICAL PARAMETERS

|                                    |                 |
|------------------------------------|-----------------|
| Rated power of the luminaire [W]*: | 17.00; 30.00    |
| Colour temperature [K]:            | 3000; 4000      |
| Luminous flux [lm]*:               | 1390 - 3550     |
| Ingress protection:                | IP67            |
| Impact resistance:                 | IK10            |
| Colour rendering index:            | 80              |
| Material of the body:              | aluminium       |
| Colour of the body:                | silver          |
| Beam angle [°]:                    | 10; 30          |
| Working temperature [°C]:          | from -20 to +55 |
| Dimensions (H/W/T/S) [mm]:         | f148; f1216.5;  |

## CHARACTERISTICS

The Ilumi Ground series was designed for the most demanding customers looking for customised and economical solutions. The body of the luminaire is made of cast aluminium, which has enabled a significant reduction in weight and price. A mounting box is included.

## APPLICATION

The luminaires are ideal for illuminating garden or park spaces. Due to their lightweight construction, they are easy to install on external walls. The Ilumi Ground luminaire can be used to illuminate a wide range of spaces and objects, such as parks, gardens, terraces, squares, premises and plants.

# ILUMI GROUND

## GENERAL CARD


## AVAILABLE VERSIONS




Click index >>, to see details

| Rated power of the luminaire [W]* | Colour temperature [K] | Luminous flux [lm]* | Version | Beam angle [°] | Dimensions (H/W/T/S) [mm] | Index                           |
|-----------------------------------|------------------------|---------------------|---------|----------------|---------------------------|---------------------------------|
| 17                                | 3000                   | 1390                | S       | 10             | fi148                     | <a href="#">&gt;&gt; 377228</a> |
| 17                                | 3000                   | 1390                | S       | 30             | fi148                     | <a href="#">&gt;&gt; 377235</a> |
| 17                                | 4000                   | 1450                | S       | 10             | fi148                     | <a href="#">&gt;&gt; 377242</a> |
| 17                                | 4000                   | 1450                | S       | 30             | fi148                     | <a href="#">&gt;&gt; 377259</a> |
| 30                                | 3000                   | 3200                | M       | 10             | fi216.5                   | <a href="#">&gt;&gt; 377266</a> |
| 30                                | 3000                   | 3200                | M       | 30             | fi216.5                   | <a href="#">&gt;&gt; 377273</a> |
| 30                                | 4000                   | 3550                | M       | 10             | fi216.5                   | <a href="#">&gt;&gt; 377280</a> |
| 30                                | 4000                   | 3550                | M       | 30             | fi216.5                   | <a href="#">&gt;&gt; 377297</a> |


LUMINOUS INTENSITY DISTRIB. CURVE




10°




10°




10°




10°



30°



30°




30°


# ILUMI GROUND

## GENERAL CARD

### Ilumi Ground XS

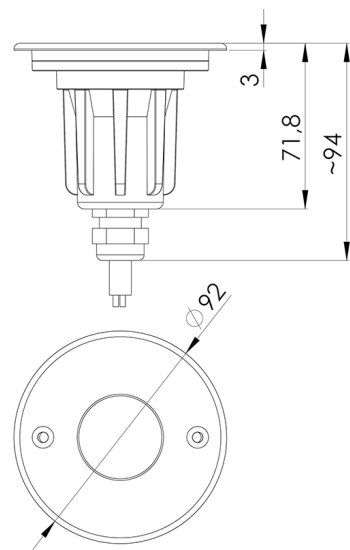

### Ilumi Ground S

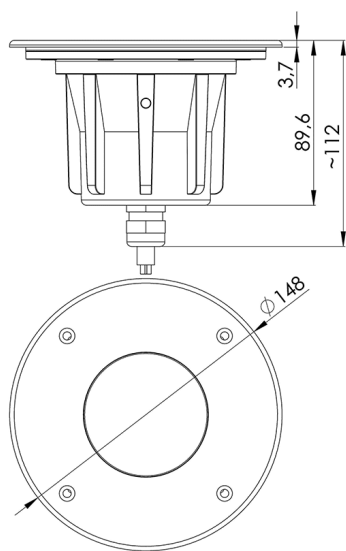

Card creation date: 22 May 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 55/2025



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl

Ilumi Ground M

