
BARIS 40 LED UGR PLUS

GENERAL CARD

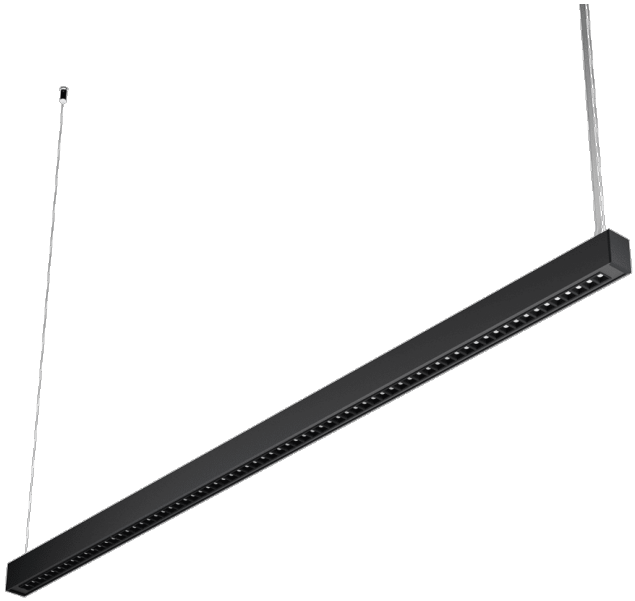

TECHNICAL PARAMETERS

Ingress protection:	IP20; IP44
Impact resistance:	IK03
Rated power of the luminaire [W]*:	17.00 - 40.00
Luminous flux [lm]*:	1875 - 5875
Colour temperature [K]:	3000; 4000
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser material:	PC
Diffuser type:	transparent
Optics material:	PC
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	53/40/1140; 53/40/1421;

CHARACTERISTICS

The BARIS 40 LED UGR PLUS luminaire was created to provide maximum comfort and work efficiency. With a UGR (Unified Glare Rating) value below 19, it minimizes the glare effect, affecting well-being, reducing fatigue and reducing the number of errors made. Suspended or surface-mounted lighting lamp with a very narrow cross-section. Its body is made of anodized aluminum profile in gray or aluminum profile painted white or black (other colors available on request). The optical system is in the form of a lens with a parabolic louver.

The luminaire is equipped with a unique suspension system that facilitates the installation of the lamp and adjustment of the suspension. All BARIS 40 LED suspended luminaires contain 1.2 m long suspensions with a box included in the set.

APPLICATION

The luminaire is intended for indoor use. Especially recommended as a source of main lighting conducive to office work. Unique design, energy-saving LED modules and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern A+ class office buildings, with particular emphasis on representative rooms.

BARIS 40 LED UGR PLUS

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

BARIS 40 LED UGR PLUS surface

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
17	3000	2050	121	70	IP20	black		surface	53/40/1140	>> 770128
17	3000	2050	121	70	IP20	black	yes	surface	53/40/1140	>> 770180
17	3000	2075	122	70	IP20	grey		surface	53/40/1140	>> 770104
17	3000	2075	122	70	IP20	grey	yes	surface	53/40/1140	>> 770166
17	4000	2175	128	70	IP20	black		surface	53/40/1140	>> 770005
17	4000	2175	128	70	IP20	black	yes	surface	53/40/1140	>> 770067
17	4000	2200	129	70	IP20	grey		surface	53/40/1140	>> 769986
17	4000	2200	129	70	IP20	grey	yes	surface	53/40/1140	>> 770043
17	3000	2250	132	60	IP20	black		surface	53/40/1140	>> 769160
17	3000	2250	132	60	IP20	black	yes	surface	53/40/1140	>> 769221
17	3000	2275	134	60	IP20	grey		surface	53/40/1140	>> 769146
17	3000	2275	134	60	IP20	grey	yes	surface	53/40/1140	>> 769207
17	4000	2375	140	60	IP20	black		surface	53/40/1140	>> 769047
17	4000	2375	140	60	IP20	black	yes	surface	53/40/1140	>> 769108
17	3000	2375	140	70	IP20	white		surface	53/40/1140	>> 770081
17	3000	2375	140	70	IP20	white	yes	surface	53/40/1140	>> 770142
17	4000	2400	141	60	IP20	grey		surface	53/40/1140	>> 769023
17	4000	2400	141	60	IP20	grey	yes	surface	53/40/1140	>> 769085
17	3000	2500	147	60	IP20	white		surface	53/40/1140	>> 769122
17	3000	2500	147	60	IP20	white	yes	surface	53/40/1140	>> 769184
17	4000	2500	147	70	IP20	white		surface	53/40/1140	>> 769962
17	4000	2500	147	70	IP20	white	yes	surface	53/40/1140	>> 770029
17	4000	2625	154	60	IP20	white		surface	53/40/1140	>> 769009
17	4000	2625	154	60	IP20	white	yes	surface	53/40/1140	>> 769061
24	3000	2850	119	70	IP20	black		surface	53/40/1140	>> 770135
24	3000	2850	119	70	IP20	black	yes	surface	53/40/1140	>> 770197
24	3000	2900	121	70	IP20	grey		surface	53/40/1140	>> 770111
24	3000	2900	121	70	IP20	grey	yes	surface	53/40/1140	>> 770173
24	4000	2975	124	70	IP20	black		surface	53/40/1140	>> 770012
24	4000	2975	124	70	IP20	black	yes	surface	53/40/1140	>> 770074
24	4000	3025	126	70	IP20	grey		surface	53/40/1140	>> 769993
24	4000	3025	126	70	IP20	grey	yes	surface	53/40/1140	>> 770050
24	3000	3125	130	60	IP20	black		surface	53/40/1140	>> 769177

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
24	3000	3125	130	60	IP20	black	yes	surface	53/40/1140	>> 769238
24	3000	3175	132	60	IP20	grey		surface	53/40/1140	>> 769153
24	3000	3175	132	60	IP20	grey	yes	surface	53/40/1140	>> 769214
24	4000	3275	136	60	IP20	black		surface	53/40/1140	>> 769054
24	4000	3275	136	60	IP20	black	yes	surface	53/40/1140	>> 769115
24	3000	3300	138	70	IP20	white		surface	53/40/1140	>> 770098
24	3000	3300	138	70	IP20	white	yes	surface	53/40/1140	>> 770159
24	4000	3325	139	60	IP20	grey		surface	53/40/1140	>> 769030
24	4000	3325	139	60	IP20	grey	yes	surface	53/40/1140	>> 769092
24	3000	3475	145	60	IP20	white		surface	53/40/1140	>> 769139
24	3000	3475	145	60	IP20	white	yes	surface	53/40/1140	>> 769191
24	4000	3475	145	70	IP20	white		surface	53/40/1140	>> 769979
24	4000	3475	145	70	IP20	white	yes	surface	53/40/1140	>> 770036
24	4000	3650	152	60	IP20	white		surface	53/40/1140	>> 769016
24	4000	3650	152	60	IP20	white	yes	surface	53/40/1140	>> 769078
26	3000	3175	122	70	IP20	black		surface	53/40/1421	>> 770371
26	3000	3175	122	70	IP20	black	yes	surface	53/40/1421	>> 770432
26	3000	3225	124	70	IP20	grey		surface	53/40/1421	>> 770357
26	3000	3225	124	70	IP20	grey	yes	surface	53/40/1421	>> 770418
26	4000	3325	128	70	IP20	black		surface	53/40/1421	>> 770258
26	4000	3325	128	70	IP20	black	yes	surface	53/40/1421	>> 770319
26	4000	3350	129	70	IP20	grey		surface	53/40/1421	>> 770234
26	4000	3350	129	70	IP20	grey	yes	surface	53/40/1421	>> 770296
26	3000	3700	142	70	IP20	white		surface	53/40/1421	>> 770333
26	3000	3700	142	70	IP20	white	yes	surface	53/40/1421	>> 770395
26	4000	3850	148	70	IP20	white		surface	53/40/1421	>> 770210
26	4000	3850	148	70	IP20	white	yes	surface	53/40/1421	>> 770272
31	3000	3725	120	70	IP20	black		surface	53/40/1421	>> 770364
31	3000	3725	120	70	IP20	black	yes	surface	53/40/1421	>> 770425
31	3000	3775	122	70	IP20	grey		surface	53/40/1421	>> 770340
31	3000	3775	122	70	IP20	grey	yes	surface	53/40/1421	>> 770401
31	4000	3925	127	70	IP20	black		surface	53/40/1421	>> 770241
31	4000	3925	127	70	IP20	black	yes	surface	53/40/1421	>> 770302
31	4000	3950	127	70	IP20	grey		surface	53/40/1421	>> 770227
31	4000	3950	127	70	IP20	grey	yes	surface	53/40/1421	>> 770289
31	3000	4100	132	60	IP20	black		surface	53/40/1421	>> 769405
31	3000	4100	132	60	IP20	black	yes	surface	53/40/1421	>> 769467
31	3000	4150	134	60	IP20	grey		surface	53/40/1421	>> 769382

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
31	3000	4150	134	60	IP20	grey	yes	surface	53/40/1421	>> 769443
31	4000	4300	139	60	IP20	black		surface	53/40/1421	>> 769283
31	4000	4300	139	60	IP20	black	yes	surface	53/40/1421	>> 769344
31	3000	4325	140	70	IP20	white		surface	53/40/1421	>> 770326
31	3000	4325	140	70	IP20	white	yes	surface	53/40/1421	>> 770388
31	4000	4350	140	60	IP20	grey		surface	53/40/1421	>> 769269
31	4000	4350	140	60	IP20	grey	yes	surface	53/40/1421	>> 769320
31	3000	4550	147	60	IP20	white		surface	53/40/1421	>> 769368
31	3000	4550	147	60	IP20	white	yes	surface	53/40/1421	>> 769429
31	4000	4550	147	70	IP20	white		surface	53/40/1421	>> 770203
31	4000	4550	147	70	IP20	white	yes	surface	53/40/1421	>> 770265
31	4000	4775	154	60	IP20	white		surface	53/40/1421	>> 769245
31	4000	4775	154	60	IP20	white	yes	surface	53/40/1421	>> 769306
40	3000	5050	126	60	IP20	black		surface	53/40/1421	>> 769412
40	3000	5050	126	60	IP20	black	yes	surface	53/40/1421	>> 769474
40	3000	5100	128	60	IP20	grey		surface	53/40/1421	>> 769399
40	3000	5100	128	60	IP20	grey	yes	surface	53/40/1421	>> 769450
40	4000	5300	133	60	IP20	black		surface	53/40/1421	>> 769290
40	4000	5300	133	60	IP20	black	yes	surface	53/40/1421	>> 769351
40	4000	5350	134	60	IP20	grey		surface	53/40/1421	>> 769276
40	4000	5350	134	60	IP20	grey	yes	surface	53/40/1421	>> 769337
40	3000	5625	141	60	IP20	white		surface	53/40/1421	>> 769375
40	3000	5625	141	60	IP20	white	yes	surface	53/40/1421	>> 769436
40	4000	5875	147	60	IP20	white		surface	53/40/1421	>> 769252
40	4000	5875	147	60	IP20	white	yes	surface	53/40/1421	>> 769313

BARIS 40 LED UGR PLUS suspended

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
17	3000	1875	110	70	IP44	black		suspended	53/40/1140	>> 771569
17	3000	1875	110	70	IP44	black	yes	suspended	53/40/1140	>> 771620
17	3000	1900	112	70	IP44	grey		suspended	53/40/1140	>> 771545
17	3000	1900	112	70	IP44	grey	yes	suspended	53/40/1140	>> 771606
17	4000	1975	116	70	IP44	black		suspended	53/40/1140	>> 771446
17	4000	1975	116	70	IP44	black	yes	suspended	53/40/1140	>> 771507
17	4000	2000	118	70	IP44	grey		suspended	53/40/1140	>> 771422
17	4000	2000	118	70	IP44	grey	yes	suspended	53/40/1140	>> 771484
17	3000	2050	121	70	IP20	black		suspended	53/40/1140	>> 770609

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
17	3000	2050	121	70	IP20	black	yes	suspended	53/40/1140	>> 770661
17	3000	2075	122	70	IP20	grey		suspended	53/40/1140	>> 770586
17	3000	2075	122	70	IP20	grey	yes	suspended	53/40/1140	>> 770647
17	3000	2075	122	60	IP44	black		suspended	53/40/1140	>> 771088
17	3000	2075	122	60	IP44	black	yes	suspended	53/40/1140	>> 771149
17	3000	2100	124	60	IP44	grey		suspended	53/40/1140	>> 771064
17	3000	2100	124	60	IP44	grey	yes	suspended	53/40/1140	>> 771125
17	4000	2175	128	70	IP20	black		suspended	53/40/1140	>> 770487
17	4000	2175	128	70	IP20	black	yes	suspended	53/40/1140	>> 770548
17	3000	2175	128	70	IP44	white		suspended	53/40/1140	>> 771521
17	3000	2175	128	70	IP44	white	yes	suspended	53/40/1140	>> 771583
17	4000	2200	129	70	IP20	grey		suspended	53/40/1140	>> 770463
17	4000	2200	129	70	IP20	grey	yes	suspended	53/40/1140	>> 770524
17	4000	2200	129	60	IP44	black		suspended	53/40/1140	>> 770968
17	4000	2200	129	60	IP44	black	yes	suspended	53/40/1140	>> 771026
17	4000	2225	131	60	IP44	grey		suspended	53/40/1140	>> 770944
17	4000	2225	131	60	IP44	grey	yes	suspended	53/40/1140	>> 771002
17	3000	2250	132	60	IP20	black		suspended	53/40/1140	>> 769641
17	3000	2250	132	60	IP20	black	yes	suspended	53/40/1140	>> 769702
17	3000	2275	134	60	IP20	grey		suspended	53/40/1140	>> 769627
17	3000	2275	134	60	IP20	grey	yes	suspended	53/40/1140	>> 769689
17	4000	2275	134	70	IP44	white		suspended	53/40/1140	>> 771408
17	4000	2275	134	70	IP44	white	yes	suspended	53/40/1140	>> 771460
17	3000	2300	135	60	IP44	white		suspended	53/40/1140	>> 771040
17	3000	2300	135	60	IP44	white	yes	suspended	53/40/1140	>> 771101
17	4000	2375	140	60	IP20	black		suspended	53/40/1140	>> 769528
17	4000	2375	140	60	IP20	black	yes	suspended	53/40/1140	>> 769580
17	3000	2375	140	70	IP20	white		suspended	53/40/1140	>> 770562
17	3000	2375	140	70	IP20	white	yes	suspended	53/40/1140	>> 770623
17	4000	2400	141	60	IP20	grey		suspended	53/40/1140	>> 769504
17	4000	2400	141	60	IP20	grey	yes	suspended	53/40/1140	>> 769566
17	4000	2425	143	60	IP44	white		suspended	53/40/1140	>> 770920
17	4000	2425	143	60	IP44	white	yes	suspended	53/40/1140	>> 770982
17	3000	2500	147	60	IP20	white		suspended	53/40/1140	>> 769603
17	3000	2500	147	60	IP20	white	yes	suspended	53/40/1140	>> 769665
17	4000	2500	147	70	IP20	white		suspended	53/40/1140	>> 770449
17	4000	2500	147	70	IP20	white	yes	suspended	53/40/1140	>> 770500
17	4000	2625	154	60	IP20	white		suspended	53/40/1140	>> 769481

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
17	4000	2625	154	60	IP20	white	yes	suspended	53/40/1140	>> 769542
24	3000	2600	108	70	IP44	black		suspended	53/40/1140	>> 771576
24	3000	2600	108	70	IP44	black	yes	suspended	53/40/1140	>> 771637
24	3000	2650	110	70	IP44	grey		suspended	53/40/1140	>> 771552
24	3000	2650	110	70	IP44	grey	yes	suspended	53/40/1140	>> 771613
24	4000	2725	114	70	IP44	black		suspended	53/40/1140	>> 771453
24	4000	2725	114	70	IP44	black	yes	suspended	53/40/1140	>> 771514
24	4000	2775	116	70	IP44	grey		suspended	53/40/1140	>> 771439
24	4000	2775	116	70	IP44	grey	yes	suspended	53/40/1140	>> 771491
24	3000	2850	119	70	IP20	black		suspended	53/40/1140	>> 770616
24	3000	2850	119	70	IP20	black	yes	suspended	53/40/1140	>> 770678
24	3000	2875	120	60	IP44	black		suspended	53/40/1140	>> 771095
24	3000	2875	120	60	IP44	black	yes	suspended	53/40/1140	>> 771156
24	3000	2900	121	70	IP20	grey		suspended	53/40/1140	>> 770593
24	3000	2900	121	70	IP20	grey	yes	suspended	53/40/1140	>> 770654
24	3000	2925	122	60	IP44	grey		suspended	53/40/1140	>> 771071
24	3000	2925	122	60	IP44	grey	yes	suspended	53/40/1140	>> 771132
24	4000	2975	124	70	IP20	black		suspended	53/40/1140	>> 770494
24	4000	2975	124	70	IP20	black	yes	suspended	53/40/1140	>> 770555
24	4000	3025	126	70	IP20	grey		suspended	53/40/1140	>> 770470
24	4000	3025	126	70	IP20	grey	yes	suspended	53/40/1140	>> 770531
24	4000	3025	126	60	IP44	black		suspended	53/40/1140	>> 770975
24	4000	3025	126	60	IP44	black	yes	suspended	53/40/1140	>> 771033
24	3000	3025	126	70	IP44	white		suspended	53/40/1140	>> 771538
24	3000	3025	126	70	IP44	white	yes	suspended	53/40/1140	>> 771590
24	4000	3075	128	60	IP44	grey		suspended	53/40/1140	>> 770951
24	4000	3075	128	60	IP44	grey	yes	suspended	53/40/1140	>> 771019
24	3000	3125	130	60	IP20	black		suspended	53/40/1140	>> 769658
24	3000	3125	130	60	IP20	black	yes	suspended	53/40/1140	>> 769719
24	3000	3175	132	60	IP20	grey		suspended	53/40/1140	>> 769634
24	3000	3175	132	60	IP20	grey	yes	suspended	53/40/1140	>> 769696
24	4000	3175	132	70	IP44	white		suspended	53/40/1140	>> 771415
24	4000	3175	132	70	IP44	white	yes	suspended	53/40/1140	>> 771477
24	3000	3200	133	60	IP44	white		suspended	53/40/1140	>> 771057
24	3000	3200	133	60	IP44	white	yes	suspended	53/40/1140	>> 771118
24	4000	3275	136	60	IP20	black		suspended	53/40/1140	>> 769535
24	4000	3275	136	60	IP20	black	yes	suspended	53/40/1140	>> 769597
24	3000	3300	138	70	IP20	white		suspended	53/40/1140	>> 770579

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
24	3000	3300	138	70	IP20	white	yes	suspended	53/40/1140	>> 770630
24	4000	3325	139	60	IP20	grey		suspended	53/40/1140	>> 769511
24	4000	3325	139	60	IP20	grey	yes	suspended	53/40/1140	>> 769573
24	4000	3375	141	60	IP44	white		suspended	53/40/1140	>> 770937
24	4000	3375	141	60	IP44	white	yes	suspended	53/40/1140	>> 770999
24	3000	3475	145	60	IP20	white		suspended	53/40/1140	>> 769610
24	3000	3475	145	60	IP20	white	yes	suspended	53/40/1140	>> 769672
24	4000	3475	145	70	IP20	white		suspended	53/40/1140	>> 770456
24	4000	3475	145	70	IP20	white	yes	suspended	53/40/1140	>> 770517
24	4000	3650	152	60	IP20	white		suspended	53/40/1140	>> 769498
24	4000	3650	152	60	IP20	white	yes	suspended	53/40/1140	>> 769559
26	3000	2900	112	70	IP44	black		suspended	53/40/1421	>> 771811
26	3000	2900	112	70	IP44	black	yes	suspended	53/40/1421	>> 771873
26	3000	2925	113	70	IP44	grey		suspended	53/40/1421	>> 771798
26	3000	2925	113	70	IP44	grey	yes	suspended	53/40/1421	>> 771859
26	4000	3050	117	70	IP44	grey		suspended	53/40/1421	>> 771675
26	4000	3050	117	70	IP44	black		suspended	53/40/1421	>> 771699
26	4000	3050	117	70	IP44	grey	yes	suspended	53/40/1421	>> 771736
26	4000	3050	117	70	IP44	black	yes	suspended	53/40/1421	>> 771750
26	3000	3175	122	70	IP20	black		suspended	53/40/1421	>> 770852
26	3000	3175	122	70	IP20	black	yes	suspended	53/40/1421	>> 770913
26	3000	3225	124	70	IP20	grey		suspended	53/40/1421	>> 770838
26	3000	3225	124	70	IP20	grey	yes	suspended	53/40/1421	>> 770890
26	4000	3325	128	70	IP20	black		suspended	53/40/1421	>> 770739
26	4000	3325	128	70	IP20	black	yes	suspended	53/40/1421	>> 770791
26	4000	3350	129	70	IP20	grey		suspended	53/40/1421	>> 770715
26	4000	3350	129	70	IP20	grey	yes	suspended	53/40/1421	>> 770777
26	3000	3375	130	70	IP44	white		suspended	53/40/1421	>> 771774
26	3000	3375	130	70	IP44	white	yes	suspended	53/40/1421	>> 771835
26	4000	3525	136	70	IP44	white		suspended	53/40/1421	>> 771651
26	4000	3525	136	70	IP44	white	yes	suspended	53/40/1421	>> 771712
26	3000	3700	142	70	IP20	white		suspended	53/40/1421	>> 770814
26	3000	3700	142	70	IP20	white	yes	suspended	53/40/1421	>> 770876
26	4000	3850	148	70	IP20	white		suspended	53/40/1421	>> 770692
26	4000	3850	148	70	IP20	white	yes	suspended	53/40/1421	>> 770753
31	3000	3400	110	70	IP44	black		suspended	53/40/1421	>> 771804
31	3000	3400	110	70	IP44	black	yes	suspended	53/40/1421	>> 771866
31	3000	3450	111	70	IP44	grey		suspended	53/40/1421	>> 771781

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
31	3000	3450	111	70	IP44	grey	yes	suspended	53/40/1421	>> 771842
31	4000	3575	115	70	IP44	black		suspended	53/40/1421	>> 771682
31	4000	3575	115	70	IP44	black	yes	suspended	53/40/1421	>> 771743
31	4000	3625	117	70	IP44	grey		suspended	53/40/1421	>> 771668
31	4000	3625	117	70	IP44	grey	yes	suspended	53/40/1421	>> 771729
31	3000	3725	120	70	IP20	black		suspended	53/40/1421	>> 770845
31	3000	3725	120	70	IP20	black	yes	suspended	53/40/1421	>> 770906
31	3000	3775	122	70	IP20	grey		suspended	53/40/1421	>> 770821
31	3000	3775	122	70	IP20	grey	yes	suspended	53/40/1421	>> 770883
31	3000	3775	122	60	IP44	black		suspended	53/40/1421	>> 771323
31	3000	3775	122	60	IP44	black	yes	suspended	53/40/1421	>> 771385
31	3000	3825	123	60	IP44	grey		suspended	53/40/1421	>> 771309
31	3000	3825	123	60	IP44	grey	yes	suspended	53/40/1421	>> 771361
31	4000	3925	127	70	IP20	black		suspended	53/40/1421	>> 770722
31	4000	3925	127	70	IP20	black	yes	suspended	53/40/1421	>> 770784
31	4000	3950	127	70	IP20	grey		suspended	53/40/1421	>> 770708
31	4000	3950	127	70	IP20	grey	yes	suspended	53/40/1421	>> 770760
31	3000	3950	127	70	IP44	white		suspended	53/40/1421	>> 771767
31	3000	3950	127	70	IP44	white	yes	suspended	53/40/1421	>> 771828
31	4000	3975	128	60	IP44	black		suspended	53/40/1421	>> 771200
31	4000	3975	128	60	IP44	black	yes	suspended	53/40/1421	>> 771262
31	4000	4025	130	60	IP44	grey		suspended	53/40/1421	>> 771187
31	4000	4025	130	60	IP44	grey	yes	suspended	53/40/1421	>> 771248
31	3000	4100	132	60	IP20	black		suspended	53/40/1421	>> 769887
31	3000	4100	132	60	IP20	black	yes	suspended	53/40/1421	>> 769948
31	3000	4150	134	60	IP20	grey		suspended	53/40/1421	>> 769863
31	3000	4150	134	60	IP20	grey	yes	suspended	53/40/1421	>> 769924
31	4000	4150	134	70	IP44	white		suspended	53/40/1421	>> 771644
31	4000	4150	134	70	IP44	white	yes	suspended	53/40/1421	>> 771705
31	3000	4200	135	60	IP44	white		suspended	53/40/1421	>> 771286
31	3000	4200	135	60	IP44	white	yes	suspended	53/40/1421	>> 771347
31	4000	4300	139	60	IP20	black		suspended	53/40/1421	>> 769764
31	4000	4300	139	60	IP20	black	yes	suspended	53/40/1421	>> 769825
31	3000	4325	140	70	IP20	white		suspended	53/40/1421	>> 770807
31	3000	4325	140	70	IP20	white	yes	suspended	53/40/1421	>> 770869
31	4000	4350	140	60	IP20	grey		suspended	53/40/1421	>> 769740
31	4000	4350	140	60	IP20	grey	yes	suspended	53/40/1421	>> 769801
31	4000	4400	142	60	IP44	white	yes	suspended	53/40/1421	>> 771224

BARIS 40 LED UGR PLUS

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Luminous efficacy [lm/W]	Beam angle [°]	Ingress protection	Colour of the body	DIMM DALI	Mounting version	Dimensions (H/W/T/S) [mm]	Index
31	3000	4550	147	60	IP20	white		suspended	53/40/1421	>> 769849
31	3000	4550	147	60	IP20	white	yes	suspended	53/40/1421	>> 769900
31	4000	4550	147	70	IP20	white		suspended	53/40/1421	>> 770685
31	4000	4550	147	70	IP20	white	yes	suspended	53/40/1421	>> 770746
31	4000	4775	154	60	IP20	white		suspended	53/40/1421	>> 769726
31	4000	4775	154	60	IP20	white	yes	suspended	53/40/1421	>> 769788
33	4000	4400	133	60	IP44	white		suspended	53/40/1421	>> 771163
40	3000	4650	116	60	IP44	black		suspended	53/40/1421	>> 771330
40	3000	4650	116	60	IP44	black	yes	suspended	53/40/1421	>> 771392
40	3000	4700	118	60	IP44	grey		suspended	53/40/1421	>> 771316
40	3000	4700	118	60	IP44	grey	yes	suspended	53/40/1421	>> 771378
40	4000	4900	123	60	IP44	black		suspended	53/40/1421	>> 771217
40	4000	4900	123	60	IP44	black	yes	suspended	53/40/1421	>> 771279
40	4000	4925	123	60	IP44	grey		suspended	53/40/1421	>> 771194
40	4000	4925	123	60	IP44	grey	yes	suspended	53/40/1421	>> 771255
40	3000	5050	126	60	IP20	black		suspended	53/40/1421	>> 769894
40	3000	5050	126	60	IP20	black	yes	suspended	53/40/1421	>> 769955
40	3000	5100	128	60	IP20	grey		suspended	53/40/1421	>> 769870
40	3000	5100	128	60	IP20	grey	yes	suspended	53/40/1421	>> 769931
40	3000	5175	129	60	IP44	white		suspended	53/40/1421	>> 771293
40	3000	5175	129	60	IP44	white	yes	suspended	53/40/1421	>> 771354
40	4000	5300	133	60	IP20	black		suspended	53/40/1421	>> 769771
40	4000	5300	133	60	IP20	black	yes	suspended	53/40/1421	>> 769832
40	4000	5350	134	60	IP20	grey		suspended	53/40/1421	>> 769757
40	4000	5350	134	60	IP20	grey	yes	suspended	53/40/1421	>> 769818
40	4000	5425	136	60	IP44	white		suspended	53/40/1421	>> 771170
40	4000	5425	136	60	IP44	white	yes	suspended	53/40/1421	>> 771231
40	3000	5625	141	60	IP20	white		suspended	53/40/1421	>> 769856
40	3000	5625	141	60	IP20	white	yes	suspended	53/40/1421	>> 769917
40	4000	5875	147	60	IP20	white		suspended	53/40/1421	>> 769733
40	4000	5875	147	60	IP20	white	yes	suspended	53/40/1421	>> 769795

Card creation date: 24 July 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

CE Certificate CE - Nr: 122/2025

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl