NECTRA LED PLUS IOT

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44
Nominal power [W]:	15.00
Luminous flux [lm]*:	1400
Colour temperature [K] - range:	2700 - 6500
Color rendering index (Ra) >:	80
Electrical protection class:	II
Material of the body:	PC + aluminium
Colour of the body:	white
Diffuser material:	PMMA
Diffuser type:	OPAL
Mounting version:	recessed
Dimensions (H/W/T/S) [mm]:	ø170/69;

CHARACTERISTICS

The downlight with an increased IP44 level of protection is equipped with energy-saving LED light sources. Its body made of thermally conductive polycarbonate with an integrated aluminum heat sink ensures optimal working conditions for LEDs. The lampshade is designed from highly permeable PMMA and guarantees high light efficiency. The luminaire allows tool-free installation in plasterboard ceilings for low service costs. Thanks to the use of housing, it is possible to surface mount the luminaire.

IoT characteristics

The **IoT BT HYT DALI** version has: a built-in **BT HYT** module that allows you to program functions in the Lena Lighting Clue app and control in real time, and a **DALI** driver that allows you to dim the light source.

APPLICATION

Designed for indoor use in common areas, passageways or to provide additional illumination in the office rooms. Due to equal surface illumination and high energy savings, it is especially recommended for public buildings.

NECTRA LED PLUS IOT

GENERAL CARD

AVAILABLE VERSIONS

Click index >>, to see details

Nominal power [W]	Colour temperature [K] - range	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Dimensions (H/W/T/S) [mm]	Index
15	2700 - 6500	1400	OPAL	yes	BT HYT DALI	ø170/69	>> 502897


Card creation date: 22 June 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 60/2020

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl

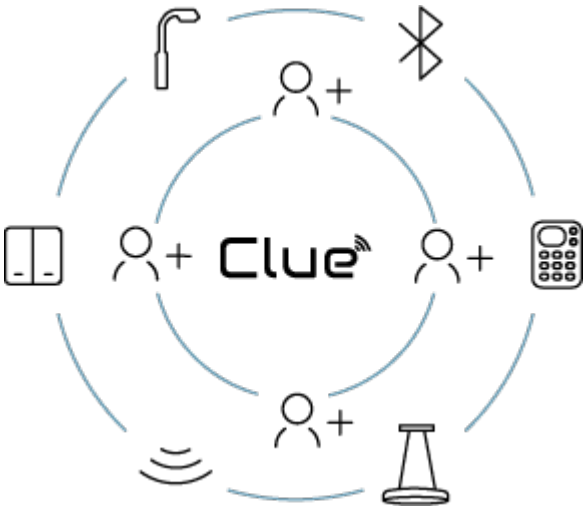

Generuj oszczędności

Efektywnie zarządzaj energią elektryczną dzięki funkcjom automatyzacji, jak inteligentne sceny, czujniki ruchu i automatyczne ściemnianie i wyłączanie oświetlenia, gdy nie jest konieczne.

Lena Lighting Clue

Bezprzewodowy system sterowania oświetleniem, który wykorzystuje technologię Bluetooth Mesh 5.0,zapewniając pełną kontrolę nad światłem w Twojej przestrzeni.Intuicyjna aplikacja i zaawansowane funkcje systemu Clue ułatwiają zarządzanie oświetleniem na drogach, w parkach, biurach, magazynach i innych przestrzeniach użytkowych.

Łącz modularnie elementy IoT

W systemie Lena Lighting Clue wszystkie komponenty z „BT HYT” w nazwie mogą się ze sobą komunikować przez Bluetooth SIG Mesh i są widoczne w aplikacji LL Clue.

Nie martw się o dane

BT Mesh oferuje zaawansowane bezpieczeństwo sieci dzięki szyfrowaniu end-to-end, uwierzytelnianiu urządzeń oraz unikalnym kluczom dla każdej warstwy komunikacji.

Rozbuduj system niezależnie od miejsca

Z systemem Clue inteligentnie rozświetlisz takie miejsca jak: biura i sale konferencyjne, magazyny i hale produkcyjne, hotele i restauracje, sklepy i galerie handlowe, drogi i parki.

Steruj i programuj z dowolnego miejsca

Dzięki użyciu opcjonalnej bramki dostępu możesz sterować i monitorować zużycie energii swojego oświetlenia z dowolnego miejsca.