


# TITAN GUARD LED PRO

GENERAL CARD

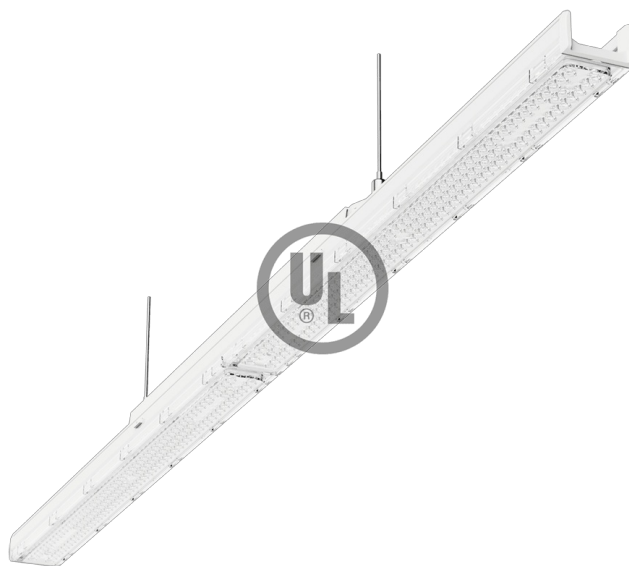

## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK06
<b>Rated power of the luminaire [W]*:</b>	26.00 - 67.00
<b>Luminous flux [lm]*:</b>	3850 - 11600
<b>Colour temperature [K]:</b>	3000; 4000
<b>Material of the body:</b>	coated steel
<b>Colour of the body:</b>	RAL9010
<b>Diffuser material:</b>	PC
<b>Beam angle [°]:</b>	30 - butterfly
<b>Light distribution type:</b>	symmetric - SN
<b>Mounting version:</b>	surface, suspended
<b>Dimensions [inches]:</b>	23.62; 47.25

## CHARACTERISTICS

Titan Guard LED Pro is an innovative solution in the category of classic hermetic luminaires, combining functionality with modern design. All the technical advantages of a traditional hermetic are enclosed in an elegant, low-profile housing, enriched with advanced optics that make the Titan Guard LED Pro a versatile luminaire. It will prove its worth in both the simplest applications and advanced industrial solutions. The product is distinguished by very fast installation and low purchase and operating costs (178 lm/W). The reliable components used in the lamp minimise the need for servicing. The Titan Guard LED Pro lamp is made of steel for exceptional durability and, thanks to its U-shaped profile design, retains the lightness typical of plastic luminaires, making it easy to install and not weighing down load-bearing structures. Titan Guard LED Pro is the ideal economic and functional solution for a wide range of applications.

## APPLICATION

The multi-purpose LED luminaire is designed for use in areas with high dust- and water-tightness requirements. It is particularly recommended for the illumination of industrial and warehouse halls, garages, car parks (underground and multi-storey), public facilities including hospitals, educational and educational facilities, retail and service facilities, transport terminals and underground passages. The lamp is ideal for new lighting applications as well as replacing traditional fluorescent luminaires with energy-efficient LED solutions. Its design is suitable for surface-mounted and suspended installation.

# TITAN GUARD LED PRO

GENERAL CARD

## AVAILABLE VERSIONS



Click index >>, to see details

Titan Guard LED Pro 23.62inches

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
26	3000	3850	105	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614750</a>
26	3000	4000	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614767</a>
26	3000	4000	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614774</a>
26	4000	4050	105	symmetric	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612480</a>
26	3000	4150	35/67	CN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614781</a>
26	3000	4150	65	SN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614798</a>
26	3000	4150	30	VN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614804</a>
26	3000	4150	90	MW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614811</a>
26	3000	4150	80	SW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614828</a>
26	3000	4150	105	VW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614835</a>
26	4000	4200	butterfly	DAN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612497</a>
26	4000	4200	asymmetric	SA	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612503</a>
26	3000	4200	120	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614842</a>
26	4000	4350	35/67	CN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612510</a>
26	4000	4350	65	SN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612527</a>
26	4000	4350	30	VN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612534</a>
26	4000	4350	90	MW	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612541</a>
26	4000	4350	80	SW	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612558</a>
26	4000	4350	105	VW	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612565</a>
26	4000	4400	120	symmetric	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612572</a>
35	3000	5050	105	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614859</a>
35	3000	5200	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614866</a>
35	3000	5250	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614873</a>
35	4000	5300	105	symmetric	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612589</a>
35	3000	5400	35/67	CN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614880</a>
35	3000	5400	65	SN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614897</a>
35	3000	5400	30	VN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614903</a>

# TITAN GUARD LED PRO

## GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
35	3000	5400	90	MW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614910</a>
35	3000	5400	80	SW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614927</a>
35	3000	5400	105	VW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614934</a>
35	4000	5450	butterfly	DAN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612596</a>
35	3000	5450	120	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614941</a>
35	4000	5500	asymmetric	SA	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612633</a>
35	4000	5700	35/67	CN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612664</a>
35	4000	5700	65	SN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612671</a>
35	4000	5700	30	VN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612688</a>
35	4000	5700	90	MW	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612695</a>
35	4000	5700	80	SW	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612701</a>
35	4000	5700	105	VW	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612718</a>
35	4000	5750	120	symmetric	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612725</a>
40	3000	5950	105	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614958</a>
40	3000	6150	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614965</a>
40	3000	6200	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614972</a>
40	4000	6250	105	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612732</a>
40	3000	6350	35/67	CN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614989</a>
40	3000	6350	65	SN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 614996</a>
40	3000	6350	30	VN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 616686</a>
40	3000	6400	90	MW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 616693</a>
40	3000	6400	80	SW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 616709</a>
40	3000	6400	105	VW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 616716</a>
40	4000	6450	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612749</a>
40	3000	6450	120	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 616723</a>
40	4000	6500	asymmetric	SA	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612756</a>
40	4000	6700	35/67	CN	-20 to +50 (68 to 122 °F)	23.62	<a href="#">&gt;&gt; 612763</a>
40	4000	6700	65	SN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612770</a>
40	4000	6700	30	VN	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612787</a>
40	4000	6750	90	MW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612794</a>
40	4000	6750	80	SW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612800</a>
40	4000	6750	105	VW	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612817</a>

# TITAN GUARD LED PRO

## GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
40	4000	6800	120	symmetric	-20 +35 °C (-4 to 95 °F)	23.62	<a href="#">&gt;&gt; 612824</a>

## Titan Guard LED Pro 47.25inches

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
41	3000	6300	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619618</a>
41	3000	6550	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619625</a>
41	3000	6550	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619632</a>
41	4000	6650	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612831</a>
41	3000	6800	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619649</a>
41	3000	6800	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619656</a>
41	3000	6800	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619663</a>
41	3000	6850	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619670</a>
41	3000	6850	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619687</a>
41	3000	6850	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619694</a>
41	4000	6900	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612848</a>
41	4000	6900	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612855</a>
41	3000	6900	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619700</a>
41	4000	7150	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612862</a>
41	4000	7150	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612879</a>
41	4000	7150	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612886</a>
41	4000	7200	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612893</a>
41	4000	7200	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612909</a>
41	4000	7200	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612916</a>
41	4000	7250	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612923</a>
46	3000	7150	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619717</a>
46	3000	7350	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619724</a>
46	3000	7400	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619731</a>
46	4000	7500	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612930</a>
46	3000	7650	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619748</a>
46	3000	7650	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619755</a>
46	3000	7650	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619762</a>
46	3000	7700	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619779</a>
46	3000	7700	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619786</a>
46	3000	7700	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619793</a>
46	4000	7750	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612947</a>
46	3000	7750	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619809</a>
46	4000	7800	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612954</a>
46	4000	8050	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612961</a>

# TITAN GUARD LED PRO

## GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
46	4000	8050	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612978</a>
46	4000	8050	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612985</a>
46	4000	8100	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 612992</a>
46	4000	8100	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613845</a>
46	4000	8100	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613852</a>
46	4000	8150	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613869</a>
51	3000	7900	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619816</a>
51	3000	8100	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619823</a>
51	3000	8150	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619830</a>
51	4000	8300	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613876</a>
51	3000	8450	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619847</a>
51	3000	8450	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619854</a>
51	3000	8450	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619861</a>
51	3000	8500	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619878</a>
51	3000	8500	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619885</a>
51	3000	8500	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619892</a>
51	4000	8550	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613883</a>
51	4000	8600	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613890</a>
51	3000	8600	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619908</a>
51	4000	8900	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613906</a>
51	4000	8900	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613913</a>
51	4000	8900	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613920</a>
51	4000	8950	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613937</a>
51	4000	8950	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613944</a>
51	4000	8950	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613951</a>
51	4000	9050	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613968</a>
57	3000	8700	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619915</a>
57	3000	9000	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619922</a>
57	3000	9050	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619939</a>
57	4000	9150	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613975</a>
57	3000	9300	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619946</a>
57	3000	9300	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619953</a>
57	3000	9300	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619960</a>
57	3000	9350	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619977</a>
57	3000	9350	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619984</a>
57	3000	9350	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 619991</a>
57	4000	9450	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613982</a>
57	3000	9450	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621642</a>

# TITAN GUARD LED PRO

## GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
57	4000	9500	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 613999</a>
57	4000	9800	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614156</a>
57	4000	9800	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614163</a>
57	4000	9800	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614170</a>
57	4000	9850	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614514</a>
57	4000	9850	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614521</a>
57	4000	9850	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614538</a>
57	4000	9950	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614545</a>
60	3000	9250	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621659</a>
60	3000	9600	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621666</a>
60	3000	9650	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621673</a>
60	4000	9750	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614552</a>
60	3000	9950	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621680</a>
60	3000	9950	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621697</a>
60	3000	9950	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621710</a>
60	3000	10000	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621727</a>
60	3000	10000	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621734</a>
60	3000	10000	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621741</a>
60	4000	10100	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614569</a>
60	3000	10100	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621758</a>
60	4000	10150	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614576</a>
60	4000	10500	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614583</a>
60	4000	10500	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614590</a>
60	4000	10500	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614606</a>
60	4000	10550	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614613</a>
60	4000	10550	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614620</a>
60	4000	10550	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614637</a>
60	4000	10650	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614644</a>
67	3000	10100	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621765</a>
67	3000	10450	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621772</a>
67	3000	10500	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621789</a>
67	4000	10650	105	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614651</a>
67	3000	10850	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621796</a>
67	3000	10850	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621819</a>
67	3000	10850	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621826</a>
67	3000	10950	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621833</a>
67	3000	10950	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621840</a>
67	3000	10950	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621857</a>

# TITAN GUARD LED PRO

## GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	Light distribution type	Working temperature [°C]	Dimensions [inches]	Index
67	4000	11000	butterfly	DAN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614668</a>
67	3000	11000	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 621864</a>
67	4000	11050	asymmetric	SA	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614675</a>
67	4000	11400	35/67	CN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614682</a>
67	4000	11400	65	SN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614699</a>
67	4000	11400	30	VN	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614705</a>
67	4000	11500	90	MW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614712</a>
67	4000	11500	80	SW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614729</a>
67	4000	11500	105	VW	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614736</a>
67	4000	11600	120	symmetric	-20 +35 °C (-4 to 95 °F)	47.25	<a href="#">&gt;&gt; 614743</a>

Card creation date: 07 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: