


CONTRA II LED IOT

GENERAL CARD

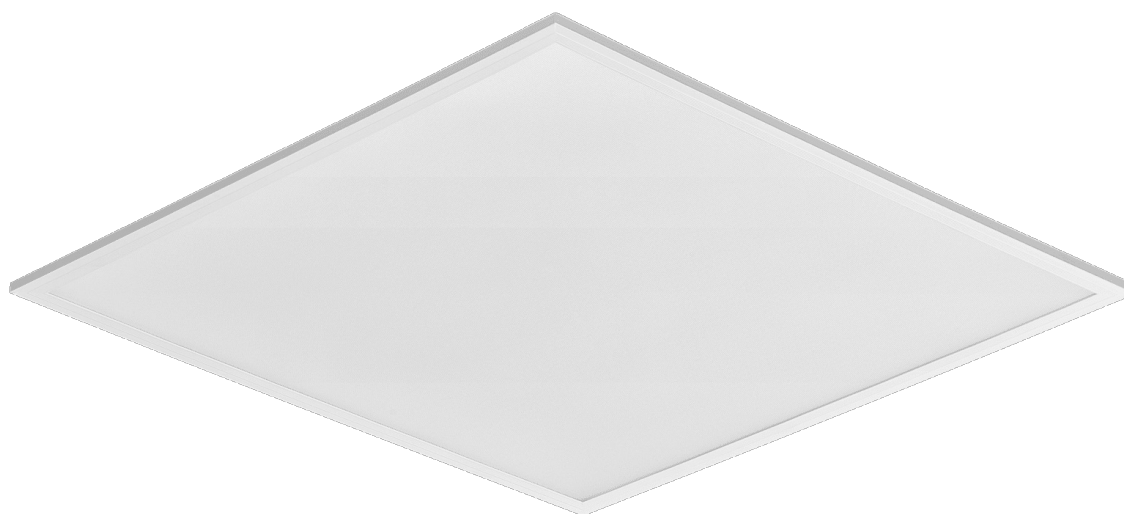

TECHNICAL PARAMETERS

Ingress protection:	IP40/IP20
Impact resistance:	IK06
Rated power of the luminaire [W]*:	24.00; 31.00; 36.00
Luminous flux [lm]*:	3200; 4300; 5000
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	2
Material of the body:	coated aluminium
Diffuser material:	PS
Diffuser type:	matt
Mounting version:	podtynkowy, natynkowy, zwieszany
Version:	DS HYT DALI
Dimensions (H/W/T/S) [mm]:	595/595/60; 1195/295/60;

CHARACTERISTICS

Contra II LED versatile LED panel characterised by its low, slim profile and elegant design. Adapted for flush-mounted installation in modular ceilings, surface-mounted or suspended using an additional frame (available as an accessory). Luminaire with integrated energy-saving LED module, made of white painted aluminium profile, equipped with structured multi-layer PS MAT or PRM shade for perfect light diffusion. Contra II LED is a new version of the proven series of LED cassette panels, designed for maximum energy efficiency, user comfort and modern commercial and office spaces. The use of a new, high-efficiency LED module with a luminous efficacy of 145–163 lm/W significantly reduces energy consumption while maintaining high light quality. Contra II LED is ideally suited to the requirements of modern investments where energy efficiency, durability and compliance with current lighting standards are of key importance.

IoT characteristics

The IoT RC DS HYT DALI version features: a built-in DS daylight sensor programmable via an RC remote control (HRC-11) and a DALI driver enabling dimming of the light source.

APPLICATION

The luminaire is intended for indoor use in office (offices, conference rooms) or representative use (hotels, restaurants); illumination of public facilities, including hospitals, educational facilities, offices, halls, garages, passageways, warehouses, shops, as well as in the food industry and food-related retail and service facilities. The unique design and excellent light performance enable CONTRA LED to be used as the main source of light, also for work that requires visual focus. The lamp is suitable for both new applications and the replacement of traditional T8 and T5 luminaires with energy-efficient LED solutions.

CONTRA II LED IOT

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Control	Version	Dimensions (H/W/T/S) [mm]	Index
24	4000	3200	yes	DS.	DS HYT DALI	595/595/60	>> 761324
24	4000	3200	yes	DS.	DS HYT DALI	1195/295/60	>> 761348
31	4000	4300	yes	DS.	DS HYT DALI	595/595/60	>> 761317
31	4000	4300	yes	DS.	DS HYT DALI	1195/295/60	>> 761331
36	4000	5000	yes	DS.	DS HYT DALI	595/595/60	>> 761300

Card creation date: 14 May 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 06/2026



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl