CORAL LED N 10W 4000K BEZ PIERŚCIENIA

DETAILED CARD



TECHNICAL PARAMETERS

Index:	229725
Ingress protection:	IP44
Impact resistance:	IK10
Nominal power [W]:	10
Luminous flux [lm]*:	860
Colour temperature [K]:	4000
SDCM:	3
Energy efficiency class:	G
Material of the body:	PP

CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation.The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation.Surface-mounted luminaire allows cable termination.

APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.

CORAL LED N 10W 4000K BEZ PIERŚCIENIA


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module
Nominal power [W]:	10
Rated power of the luminaire [W]:	12
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Luminous flux [lm]:	860
Luminous efficacy [lm/W]:	71
Energy efficiency class:	G
Electrical protection class:	II
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Power factor:	0.59
LED lifespan L70B50 [h]:	81 000
Beam angle [°]:	120
Exchangeable source:	yes
Diffuser type:	OPAL

Material of the body:	PP
Dimensions (H/W/T/S) [mm]:	ø260/108
Impact resistance:	IK10
Ingress protection:	IP44
Mounting version:	surface
Working temperature [°C]:	from -20 to +35
Net weight [kg]:	0.550
CE certificate:	46/2014
Index:	229725
EAN:	5905963229725
Category type:	bulkheads
Luminaire rated power 0min [W]:	12
ETIM class:	EC002892
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Warranty [years]:	5
Manual:	Download PDF


LIGHT CURVES

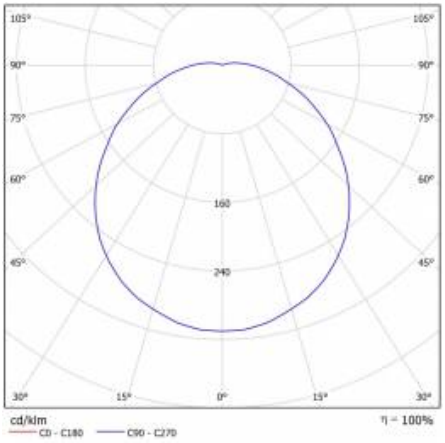

CORAL LED N 10W 4000K BEZ PIERŚCIENIA

DETAILED CARD

TECHNICAL DETAILS




CORAL LED natynkowe prowadzenie przewodów

CORAL LED N 10W 4000K BEZ PIERŚCIENIA

DETAILED CARD

ACCESSORIES AVAILABLE


index	Name
229831	CORAL- 10W service kit 10W 3000K
229770	CORAL- 10W service kit 10W 4000K
229848	CORAL- 10W service kit 10W RCR 3000K
229787	CORAL- 10W service kit 10W RCR 4000K
229763	CORAL - flush-mounting support



CORAL- 10W service kit 10W 3000K (229831)




CORAL- 10W service kit 10W 4000K (229770)



CORAL- 10W service kit 10W RCR 3000K (229848)



CORAL- 10W service kit 10W RCR 4000K (229787)



CORAL - flush-mounting support (229763)

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 46/2014

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl