

# INDUSTRY SLIM LED 590MM 3800LM 850 IP66 80X100D (33W)

---

DETAILED CARD



# INDUSTRY SLIM LED 590MM 3800LM 850 IP66 80X100D (33W)

DETAILED CARD

## TECHNICAL PARAMETERS

Ingress protection:	IP66
Rated power of the luminaire [W]*:	14
Luminous flux [lm]*:	2000 - 45500
Colour temperature [K]:	3000; 4000; 5000
Material of the body:	aluminium; profil aluminiowy
Colour of the body:	RAL 7016; czarny; srebrny; szary
Diffuser material:	PC
Diffuser type:	OPAL; Przezroczysty; clear; transparentny
Optics material:	PC
Mounting version:	natynkowy, zwieszany

## CHARACTERISTICS

Industry Slim Led - a brand new industrial luminaire is characterized by high luminous flux and very high luminous efficiency >160 lm/W, which makes this luminaire highly energy-efficient and environmentally friendly. It is distinguished by its very high IP66 tightness. It owes this tightness to its well-thought-out design. The polycarbonate diffuser is permanently attached to the housing with a durable silicone gasket. This means that in addition to the tightness thus achieved, the light module is protected from uncontrolled interference and access to the LEDs. The tightness of the lamp, is ensured by the gland, which screwed tightens the gasket and prevents the penetration of dust or moisture and water. Industry Slim Led allows for pendant or surface mounting.

## APPLICATION

The luminaire is designed to illuminate industrial and warehouse facilities, due to its minimal dimensions, also in hard-to-reach places. The Industry Slim Led luminaire is available in various versions: with different optics, wide, narrow, and dedicated to high-bay light distribution, and five types of the diffuser, including an anti-glare diffuser.

## DETAILS



# INDUSTRY SLIM LED 590MM 3800LM 850 IP66 80X100D (33W)


DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	x
EAN:	x
Rated power of the luminaire [W]:	14
Luminous flux [lm]:	2000 - 45500
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60; 50-60
Energy efficiency class:	B; C; D; E; G
Electrical protection class:	I; II
Colour temperature [K]:	3000; 4000; 5000
Colour rendering index:	>80; >90
SDCM:	≤ 3
LED lifespan L70B50 [h]:	max 179000
LED lifespan L80B20 [h]:	max 113000
LED lifespan L90B10 [h]:	max 54000
Beam angle [°]:	40/30 - 120
Diffuser material:	PC
Optics:	max 120D

Optics material:	PC
Material of the body:	aluminium; profil aluminiowy
Colour of the body:	RAL 7016; czarny; srebrny; szary
Dimensions (H/W/T/S) [mm]:	max 3600/50/75
Ingress protection:	IP66
Impact resistance:	IK09
Mounting version:	natynkowy, zwieszany
Working temperature [°C]:	od -25 do +35; od -35 do +35
DIMM DALI:	yes
Wire type:	5x1,5; 5x2,5
Through wiring:	LS2; LS2,5
UGR (4H8H):	<19
Warranty [years]:	5
CE certificate:	<a href="#">109/2022; 167/2023; 30/2022; 31/2024</a>
Manual:	<a href="#">Download PDF</a>
Vandalproof:	yes

## LIGHT CURVES

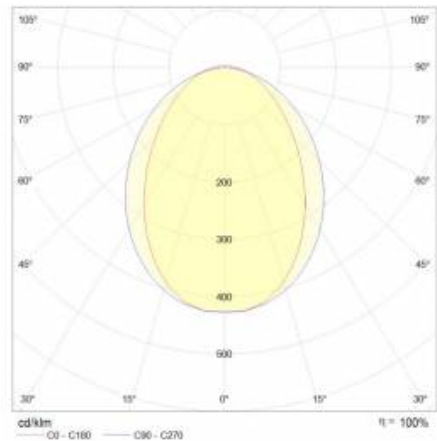

# INDUSTRY SLIM LED 590MM 3800LM 850 IP66 80X100D (33W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
908200	TYTAN LED. ATLAS LED. INDUSTRY LED - adjustable handle (set of 2)
60000006	M16 stuffing box plug various PA black M-16 - BPM-21



TYTAN LED. ATLAS LED. INDUSTRY LED - adjustable handle (set of 2) (908200)



M16 stuffing box plug various PA black M-16 - BPM-21 (60000006)

Card creation date: 25 March 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 30/2022