TERRANO S 1140X48MM 3300LM 830 I KL. WHITE 60D (28W)

DETAILED CARD

TECHNICAL PARAMETERS

Index:	577208
Rated power of the luminaire [W]*:	28
Luminous flux [lm]*:	3300
Luminous efficacy [lm/W]:	128
Energy efficiency class:	D
Electrical protection class:	I
Colour temperature [K]:	3000
Beam angle [°]:	60

CHARACTERISTICS

The new Terrano S linear luminaire, thanks to the use of the latest generation of LED modules, is characterized by energy efficiency and excellent technical parameters. Equipped with focusing lenses, Terrano S lamps are sight-friendly and effectively reduce glare (UGR of 12-19). Mounted in a busbar system, they are available in two color temperatures of 3000 K and 4000 K and two color versions: white and black.

APPLICATION

Mounting on a rail system, increases the range of applications of this lamp and allows the user to make rearrangements, even after installation. The lamp has an adapter equipped with mechanical catches that make it easy to plug in, unplug and move the lamps, while ensuring that the fixture is securely held in the rail. The lamps, together with appropriately selected rails and components, allow for ceiling or wall mounting. The Terrano S lamp is perfect as a source of light in offices, stores, dressing rooms, in passageways.

TERRANO S 1140X48MM 3300LM 830 I KL. WHITE 60D (28W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	577208
EAN:	5905963577208
Light source:	LED module
Rated power of the luminaire [W]:	28
Luminous flux [lm]:	3300
Luminous efficacy [lm/W]:	128
Energy efficiency class:	D
Electrical protection class:	I
Colour temperature [K]:	3000
Colour rendering index:	>80
SDCM:	≤ 3
Beam angle [°]:	60
Light distribution type:	symmetric
Diffuser material:	PC
Diffuser type:	matrix led

Diffuser colour:	transparent
Optics:	lens
Optics material:	PC
Material of the body:	powder coated steel
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	48/1117/69
Ingress protection:	IP20
Mounting version:	track
Working temperature [°C]:	from -10 to +35
Net weight [kg]:	1.760
CE certificate:	303/2023
Manual:	Download PDF
Category type:	louvres
Warranty [years]:	5

LIGHT CURVES

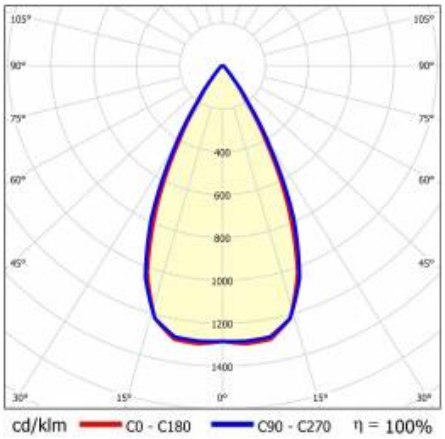

Card creation date: 19 June 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 303/2023

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl