

# TIARA 2 LED S 2050LM 730 RM9 IP66 II CL. 1DIM (14W)

## DETAILED CARD



### TECHNICAL PARAMETERS

Index:	988684/MG
Ingress protection:	IP66
Impact resistance:	IK10
Rated power of the luminaire [W]*:	14
Luminous flux [lm]*:	2050
Colour temperature [K]:	3000
Colour rendering index:	> 70
Electrical protection class:	II
Optics:	RM9

### CHARACTERISTICS

TIARA 2 LED a new generation of LED road luminaires. It uses directional multi-lens arrays made of PMMA, with each lens having the same optics, ensuring that the light characteristics remain constant over time. The luminaire's dual-chamber design maintains the integrity of the optical chamber during installation work and the opening of the electrical chamber. As standard, the luminaire offers tool-free access to the electrical fixtures using two independent clips, which, if desired and needed to protect against vandalism or uncontrolled opening, can optionally be permanently secured with screws or a seal. The upper part of the luminaire, has dedicated hinges and a safety cable to prevent falling. Using standard tools, quick and convenient service is possible, allowing replacement of any component without the need to disassemble the entire fixture and make soldered connections. The body and handle made of die-cast aluminum, powder-coated in gray, is characterized by a very high degree of IP66 and IK09 impact resistance. Standard features: ergonomic light module suspension system; NTC luminaire accidental overheating protection; fully programmable DALI driver; available functions for maintaining constant lumen output during CLO and autonomous 5-stage power reduction; filter to prevent condensation; connection terminals; tool-free access. Additional options: NEMA, ZHAGA connectors; interfacing with control systems, RCR motion sensor; anti-vandal protection with screws/seal; additional SP10kV protection outside the power supply, on/off power supply without power reduction function; knife disconnect switch that disconnects voltage if the electrical compartment is opened; design with cable terminated with quick disconnect; painting in any RAL color. Certifications: CE, RoHS, ENEC, ENEC+, Zhaga D4i.

### APPLICATION

Thanks to the use of dedicated optics, it is possible to illuminate objects such as: highways, expressways, national, provincial, county, municipal, city, neighborhood, area lighting. Optics are also available to illuminate: pedestrian crossings, sidewalks and bicycle paths.


# TIARA 2 LED S 2050LM 730 RM9 IP66 II CL. 1DIM (14W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	988684/MG	Colour of the body:	grey
Rated power of the luminaire [W]:	14	Dimensions (H/W/T/S) [mm]:	424/251/105
Luminous flux [lm]:	2050	Mounting dimensions [mm]:	ø48-60
ETIM class:	EC000062	Impact resistance:	IK10
Luminous efficacy [lm/W]:	146	Ingress protection:	IP66
Category type:	street lighting	Mounting version:	Top, on pole / Side, on boom
Energy efficiency class:	C	Tilt angle adjustment [°]:	-30° to +120° (peak); -120° to +30° (side)
Colour temperature [K]:	3000	Lateral surface (SCx) [m2]:	0.021
Version:	S	Working temperature [°C]:	from -40 to +50
Colour rendering index:	> 70	Control:	5-stage power reduction
Light source:	LED module	Protection type:	NTC + ESD
Electrical protection class:	II	Vandalproof:	yes
Optics:	RM9	Net weight [kg]:	4.280
Supply voltage [V]:	220 - 240	ULOR:	0%
Frequency [Hz]:	50 - 60	Photobiological safety:	RG0 - exempt (no photobiological hazard)
SDCM:	≤ 5	Technical Warranty:	5 with the possibility of extension to 10
Surge protection [kV]:	10	ENEC Certificate:	<a href="#">0410/ENEC/25; 0141/ENEC+/25</a>
Diffuser material:	toughened glass	CE certificate:	<a href="#">91/2023</a>
Diffuser type:	transparent	Zhaga-D4i:	<a href="#">ZG407220042023</a>
Optics material:	PMMA	Environmental Product Declaration (EPD):	<a href="#">682/2024</a>
Exchangeable source:	yes	Manual:	<a href="#">Download PDF</a>
Material of the body:	powder coated aluminium	LED lifespan L95B10 [h]:	100000

## LIGHT CURVES

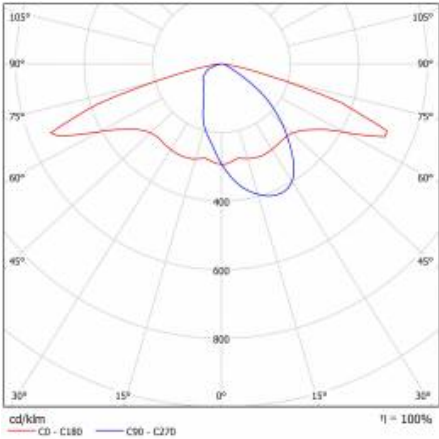

# TIARA 2 LED S 2050LM 730 RM9 IP66 II CL. 1DIM (14W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
314049	wall holder (galvanized)
314056	wall holder (grey)
UL01350	Handle fi 76mm for Tiara 2 LED M and Tiara 2 LED S
813443	Backshield P (right) Tiara 2 LED S RAL9006
813450	Backshield L (left) Tiara 2 LED S RAL9006
813436	Backshield T (back) Tiara 2 LED S RAL9006



wall holder (galvanized) (314049)



wall holder (grey) (314056)

Card creation date: 09 May 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 91/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl