

INDO SMD LED P1 30W 3000K

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|--------|
| Index: | 380181 |
| Ingress protection: | IP20 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 30 |
| Luminous flux [lm]*: | 2400 |
| Colour temperature [K]: | 3000 |
| Colour rendering index: | >80 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | A |

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light. UGR < 19.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO SMD LED P1 30W 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|------------------------------|-------------|--------------------------|---|
| Nominal power [W]: | 30 | LED lifespan L70B50 [h]: | 50000 |
| Index: | 380181 | Impact resistance: | IK07 |
| Colour temperature [K]: | 3000 | Ingress protection: | IP20 |
| Luminous flux [lm]: | 2400 | Net weight [kg]: | 3.800 |
| Dimensions (H/W/T/S) [mm]: | 595/595/105 | CE certificate: | 29/2015 |
| Energy efficiency class: | A | Category type: | louvres |
| Luminous efficacy [lm/W]: | 80 | Warranty [years]: | 5 |
| Electrical protection class: | I | ETIM class: | EC002892 |
| Colour rendering index: | >80 | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| SDCM: | ≤ 3 | Manual: | Download PDF |
| Power factor: | 0.95 | Pliik LDT: | Download |

LIGHT CURVES

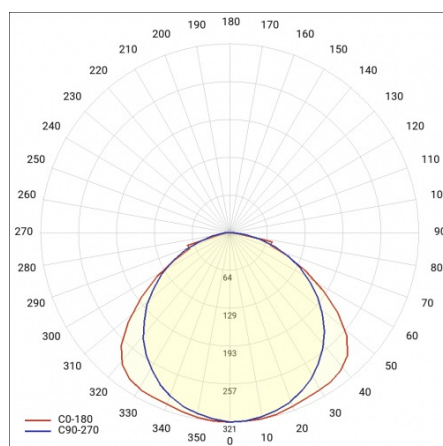

INDO SMD LED P1 30W 3000K

DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|--------|--|
| 999543 | Plasterboard recessing kit 630x630 white (steel version) |



Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 29/2015