

LEO PARK LED 30W 3200LM 4000K ASM1

DETAILED CARD



TECHNICAL PARAMETERS

Index:	599781
Light source:	LED module
Ingress protection:	IP65
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	3200
Colour temperature [K]:	4000
Colour rendering index:	>70
Electrical protection class:	I
Energy efficiency class:	E

CHARACTERISTICS

A modern street light characterised by minimalist design of its aluminium body. The PMMA light diffuser emits pleasant light. Thanks to the use of lens matrices (arrays), 3 light distribution versions are available:
ASM1 – medium asymmetric – squares, car parks, parks;
RM2 – medium street – estate roads, alleys in a park;
SM1 – medium symmetric – squares, car parks, parks.
Installation possible directly on a pole with end diameter of 60–65 mm.

APPLICATION

Luminaires for lighting streets, pavements, built-up areas, parks, squares and car parks.

DETAILS

"
Oprawy do oświećlenia placó


LEO PARK LED 30W 3200LM 4000K ASM1

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	30	Material of the body:	aluminium
Index:	599781	Colour of the body:	graphite RAL 7016
Colour temperature [K]:	4000	Dimensions (H/W/T/S) [mm]:	430/ø400
EAN:	5905963599781	Impact resistance:	IK07
Luminous flux [lm]:	3200	Ingress protection:	IP65
Light source:	LED module	Mounting version:	on the pole
Version:	ASM1	Working temperature [°C]:	from -30 to +40
Rated power of the luminaire [W]:	30	Net weight [kg]:	4
Energy efficiency class:	E	Category type:	Park and city lighting
Supply voltage [V]:	220-240	Category of application:	parkings and bicycle paths
Frequency [Hz]:	50 - 60	ETIM class:	EC000062
Luminous efficacy [lm/W]:	107	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Electrical protection class:	I	CE certificate:	167/2020
Colour rendering index:	>70	Warranty [years]:	5
LED lifespan L70B50 [h]:	100000	Manual:	Download PDF
Diffuser material:	PMMA	Plik LDT:	Download
Diffuser type:	transparent		

LIGHT CURVES

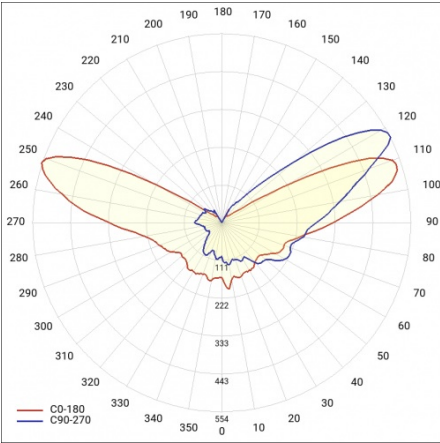

Card creation date: 09 May 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 167/2020

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl