

LEO PARK LED RM-2 4600LM 740 DALI (40W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	599804/WM
Light source:	LED module
Ingress protection:	IP65
Impact resistance:	IK07
Nominal power [W]:	40
Luminous flux [lm]*:	4600
Colour temperature [K]:	4000
Colour rendering index:	>70
Electrical protection class:	I
Energy efficiency class:	D

CHARACTERISTICS

A modern street light characterised by minimalist design of its aluminium body. The PMMA light diffuser emits pleasant light. Thanks to the use of lens matrices (arrays), 3 light distribution versions are available:

ASM1 – medium asymmetric – squares, car parks, parks;

RM2 – medium street – estate roads, alleys in a park;

SM1 – medium symmetric – squares, car parks, parks.

Installation possible directly on a pole with end diameter of 60–65 mm.

APPLICATION

Svítlidla pro osvětlení ulic, chodníků, zastavěných ploch, parků, náměstí a parkovišť.


LEO PARK LED RM-2 4600LM 740 DALI (40W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	599804/WM	Colour of the body:	graphite RAL 7016
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	430/ø400
Nominal power [W]:	40	Impact resistance:	IK07
Rated power of the luminaire [W]:	40	Ingress protection:	IP65
Supply voltage [V]:	220-240	Mounting version:	on the pole
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -30 to +40
Luminous flux [lm]:	4600	Net weight [kg]:	4
Luminous efficacy [lm/W]:	115	Category type:	Park and city lighting
Energy efficiency class:	D	Category of application:	parkings and bicycle paths
Electrical protection class:	I	Version:	RM2
Colour temperature [K]:	4000	ETIM class:	EC000062
Colour rendering index:	>70	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	100000	CE certificate:	167/2020
Diffuser material:	PMMA	Warranty [years]:	5
Diffuser type:	transparent	Manual:	Download PDF
Material of the body:	aluminium		

LIGHT CURVES

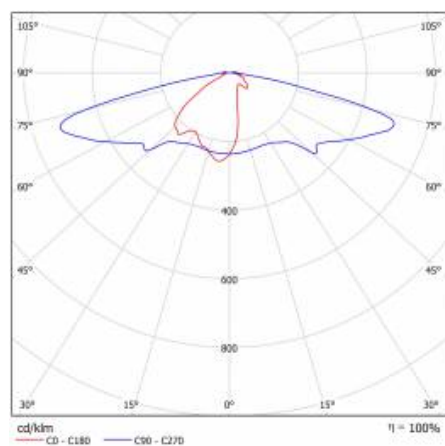

Card creation date: 06 October 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 167/2020



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl