

# FACTOR LED HB 2M 58800LM 840 90D DALI IP66 (434W) C5-M

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	683015
Ingress protection:	IP66
Impact resistance:	IK09
Rated power of the luminaire [W]*:	434
Luminous flux [lm]*:	58800
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	I
Energy efficiency class:	D

## CHARACTERISTICS

Factor Led HB C5-M (corrosion protection in harsh industrial and marine environments) is the latest generation of high bay with high power and high lumen output. It is characterised not only by very high luminous efficacy, but also by high IP66 sealing and IK09 impact resistance. These parameters are achieved thanks to the branded components used, the robust housing made of cast aluminium LM-6 (aluminium-silicon alloy) and the use of a passive lamp cooling system, which allows excess heat generation to be dissipated during lamp operation. In the C5-M version, the paint coating plays an even more important role. The Factor Led has the advantage of being very quickly and easily suspended or surface-mounted. The design allows the hanging or mounting of a lamp consisting of one or two light modules.

## APPLICATION

Ports, wharves, shipyards, oil rigs and offshore infrastructure, chemical industry and refineries, bridges and infrastructure exposed to marine conditions, lighting on ships and ferries, industrial areas, playing fields, airports, car parks with high humidity and salinity.


# FACTOR LED HB 2M 58800LM 840 90D DALI IP66 (434W) C5-M

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Rated power of the luminaire [W]:	434	Surge protection [kV]:	6
Index:	683015	Dimensions (H/W/T/S) [mm]:	387/397/125
EAN:	5905963683015	Material of the body:	aluminium
Luminous flux [lm]:	58800	Colour of the body:	RAL7016
Beam angle [°]:	90	Mounting dimensions [mm]:	357/273
Diffuser material:	PC	Impact resistance:	IK09
Diffuser type:	matrix led	Ingress protection:	IP66
Supply voltage [V]:	220-240	Mounting version:	surface-mounted or suspended
Luminous efficacy [lm/W]:	135	Working temperature [°C]:	from -40 to +45
Energy efficiency class:	D	Dimensions of single box [mm]:	430
Electrical protection class:	I	Number on the palette [pcs]:	18
Colour temperature [K]:	4000	Net weight [kg]:	9.760
Colour rendering index:	>80	Version:	2 modules
SDCM:	≤ 3	Corrosivity category:	C5-M
Power factor:	0.98	Warranty [years]:	5
LED lifespan L70B50 [h]:	156000	CE certificate:	<a href="#">263/2023</a>
LED lifespan L80B20 [h]:	98000	ENEC Certificate:	<a href="#">0404/ENEC/25</a>
LED lifespan L90B10 [h]:	47000	Manual:	<a href="#">Download PDF</a>
DIMM DALI:	yes		

## LIGHT CURVES

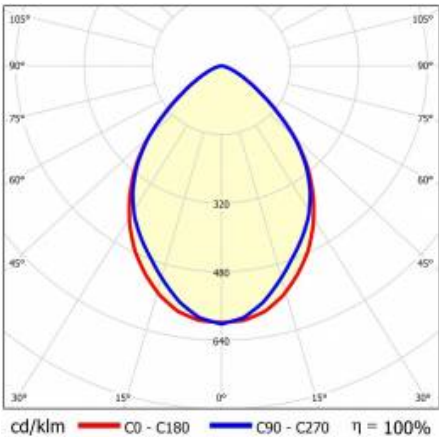

Card creation date:19 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 263/2023

 **LENA**  
LIGHTING

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)