


# BARIS 52 LED Z LAMPA T 2100LM 840 IP20 I CL. PLX BLACK 17W SINGLE

DETAILED CARD

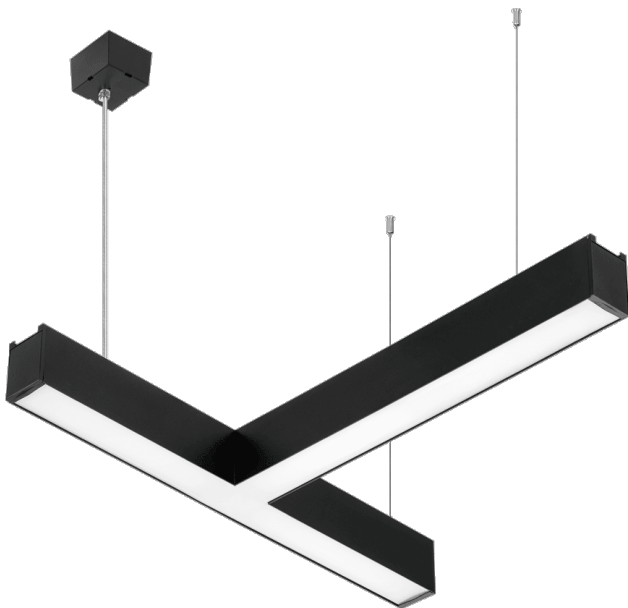

## TECHNICAL PARAMETERS

Index:	320156
Ingress protection:	IP20
Impact resistance:	IK03
Rated power of the luminaire [W]*:	17
Luminous flux [lm]*:	2100
Colour temperature [K]:	4000
Material of the body:	aluminium
Colour of the body:	black
Diffuser material:	PC
Diffuser type:	OPAL

## CHARACTERISTICS

A suspended lighting lamp of classic proportions and modern design. The lamp body is made from anodised aluminium profile in grey or an aluminium profile painted in white or black (other colours available on request). The optical system in the form of a prismatic diffuser (PRM) or a dedicated, flexible opal shade evenly illuminates the lamp. The modularity and demountability of the lamp allow the replacement of electronic components such as the LED strip, power supply and the replacement of the diffuser by qualified persons. The lamp profile has been adapted to work with IoT smart modules, which will further optimise the level and amount of light it provides. The lamp is equipped with a unique pendant system for easy lamp installation and sling adjustment. All Baris 52 LED Single suspended luminaires include a 1.2m sling with box included and are fitted with a diffuser.

## APPLICATION

Baris 52 LED Single in the shape of an L, X, T create extraordinary lighting configurations to suit the character and shape of the room, making it possible to create different figures and patterns.

# BARIS 52 LED Z LAMPA T 2100LM 840 IP20 I CL. PLX BLACK 17W SINGLE

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	320156	Diffuser type:	OPAL
Light source:	LED module	Diffuser colour:	milky
Rated power of the luminaire [W]:	17	Material of the body:	aluminium
Luminous flux [lm]:	2100	Colour of the body:	black
Supply voltage [V]:	220 - 240	Dimensions (H/W/T/S) [mm]:	590/575/52
Frequency [Hz]:	50 - 60	Impact resistance:	IK03
Luminous efficacy [lm/W]:	124	Ingress protection:	IP20
Energy efficiency class:	D	Mounting version:	suspended
Electrical protection class:	I	Net weight [kg]:	1.960
Colour temperature [K]:	4000	Product line:	T
Color rendering index (Ra) >:	80	Category of application:	office lighting
SDCM:	3	Warranty [years]:	5
LED lifespan L70B50 [h]:	112000	CE certificate:	<a href="#">40/2025</a>
LED lifespan L80B20 [h]:	70 000	Manual:	<a href="#">Download PDF</a>
LED lifespan L90B10 [h]:	34000	Environmental Product Declaration (EPD):	<a href="#">852/2025</a>
Diffuser material:	PC	Plik LDT:	<a href="#">Download</a>