QUEST LED EVO 2XM HB NT 57400LM I CL. IP67 740 SW(75D) 370W

DETAILED CARD

TECHNICAL PARAMETERS

Index:	829666
Ingress protection:	IP67
Rated power of the luminaire [W]*:	370
Luminous flux [lm]*:	57400
Colour temperature [K]:	4000
Color rendering index (Ra) >:	70
SDCM:	3
Electrical protection class:	I
Energy efficiency class:	C
Material of the body:	aluminium

CHARACTERISTICS

Quest LED EVO M, their high-bay versions: surface-mounted Quest LED EVO M HB NT and suspended Quest LED EVO M HB Z are extremely efficient floodlights and premium HB class luminaires, manufactured in Poland. Their body is made of die-cast aluminium, powder coated, without an external heat sink and ribs that make it difficult to keep clean. The diffuser is made of tempered glass, under which there are LEDs with the highest efficiency. Different types of optics, especially asymmetrical ones, provide great freedom in choosing the right solution for a specific application. Thanks to the highest tightness rating on the market (IP67) and maximum impact resistance (IK10), the floodlights will perform well in all conditions, regardless of the weather and installation location. The new version of the renowned and proven QUEST model offers even better lighting parameters, achieving an efficiency of over 170 lm/W. Quest LED EVO M meets the requirements of PN-EN 60598-2 part 5, which allows it to be classified as an illumination projector, enabling complete freedom of installation in any position, with 360° rotation and resistance to strong winds. An additional advantage for contractors is the sealed quick connector – an innovative solution that eliminates traditional, time-consuming connection methods. Thanks to an intuitive system of coloured latches, connector installation is simple, quick and tool-free. The HB NT version is designed for surface mounting as a highbay using dedicated brackets. The HB Z version is designed for suspension. The accessory kit includes brackets for pole mounting, a frame for flush mounting (e.g. shelters), light pollution reduction screens and protective grids in two colours with different degrees of light reduction (white RAL7016: 4%, body colour RAL7016: 8%). The models can be equipped with an external motion and twilight sensor. They are also available in the ENDURA version, resistant to elevated ambient temperatures up to 50°C. The range also includes dual-module versions with increased flux and power. DALI versions are available (in the case of a gap in a specific power rating in the range with a DALI power supply, check the ENDURA DALI versions). In addition, a version designed for RGB+W illumination is available.

APPLICATION

Quest LED EVO M is widely used in lighting educational, administrative and recreational facilities, halls, garages, passageways, warehouses, shops, as well as in the food industry and commercial and service facilities related to food products. They are an ideal solution for illuminating buildings, small sports fields, open spaces and car parks. They can be mounted as floodlights on poles and masts, on building facades, as well as surface-mounted highbays (HB NT version) and suspended highbays (HB Z version). Thanks to the flush-mounted option, they are perfect for shelters. Quest LED EVO M is an excellent choice for factories, production halls and large warehouses.

QUEST LED EVO 2XM HB NT 57400LM I CL. IP67 740 SW(75D) 370W

DETAILED CARD


TECHNICAL PARAMETERS TABLE

Index:	829666	**Colour of the body:**	RAL7016
EAN:	5905963829666	**Dimensions (H/W/T/S) [mm]:**	753/635/152
Light source:	LED	**Mounting dimensions [mm]:**	590/260
Rated power of the luminaire [W]:	370	**Ingress protection:**	IP67
Luminous flux [lm]:	57400	**Mounting version:**	surface
Supply voltage [V]:	220 - 240	**Working temperature [°C]:**	from -20 to +35
Surge protection [kV]:	6	**The number of implement units:**	4
AC voltage range [V]:	198-264	**Dimensions of single box [mm]:**	645
DC voltage range [V]:	176-280	**Light distribution type:**	SW
Frequency [Hz]:	50-60	**Version:**	2xM HB NT
Luminous efficacy [lm/W]:	155	**Impact resistance:**	IK10
Energy efficiency class:	C	**LED lifespan L70B50 [h]:**	162000
Electrical protection class:	I	**LED lifespan L80B10 [h]:**	108000
Colour temperature [K]:	4000	**LED lifespan L90B10 [h]:**	108000
Color rendering index (Ra) >:	70	**Warranty [years]:**	5
SDCM:	3	**CE certificate:**	79/2025
Beam angle [°]:	75	**Environmental Product Declaration (EPD):**	816/2025
Diffuser material:	glass	**Manual:**	Download PDF
Diffuser type:	transparent	**Plik LDT:**	Download
Material of the body:	aluminium		

QUEST LED EVO 2XM HB NT 57400LM I CL. IP67 740 SW(75D) 370W

DETAILED CARD

TECHNICAL PICTURES

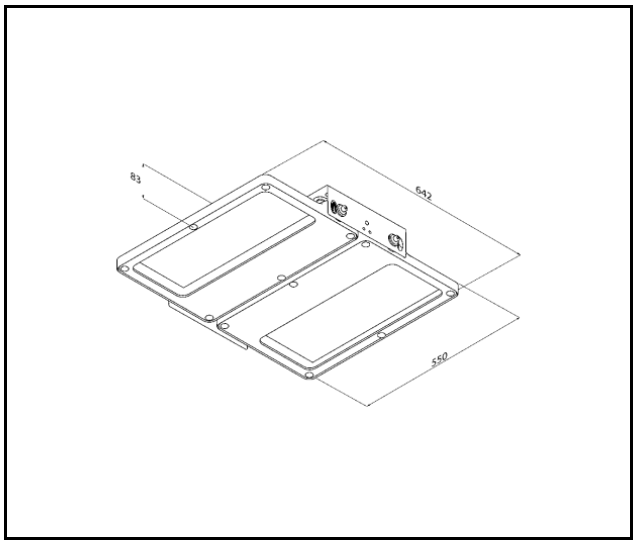


QUEST LED EVO 2XM HB NT 57400LM I CL. IP67 740 SW(75D) 370W


DETAILED CARD

ACCESSORIES AVAILABLE


index	Name
840432	QUEST LED EVO M protective grid RAL7016
840074	QUEST LED EVO M protective grid RAL9003
840388	QUEST LED EVO S/M/L RCR set 1x
840371	QUEST LED EVO S/M/L RCR set 2x




QUEST LED EVO M protective grid RAL7016 (840432)



QUEST LED EVO M protective grid RAL9003 (840074)



QUEST LED EVO S/M/L RCR set 1x (840388)



QUEST LED EVO S/M/L RCR set 2x (840371)

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 79/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl