

PROXIMA LED 1350LM 3000K IP65 II CL. RCR OPAL WHITE 12W (H)

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|------------------------------------|---------|
| Index: | 103919 |
| Ingress protection: | IP65/54 |
| Impact resistance: | IK10 |
| Rated power of the luminaire [W]*: | 12 |
| Luminous flux [lm]*: | 1350 |
| Colour temperature [K]: | 3000 |
| Energy efficiency class: | E |
| Material of the body: | PP |
| Diffuser material: | PC |
| Diffuser type: | OPAL |

CHARACTERISTICS

Surface-mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact-resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.


PROXIMA LED 1350LM 3000K IP65 II CL. RCR OPAL WHITE 12W (H)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|--------------------------------|------------------------------|
| Index: | 103919 | Impact resistance: | IK10 |
| EAN: | 5905963103919 | Ingress protection: | IP65/54 |
| Light source: | LED module | Mounting version: | surface |
| Rated power of the luminaire [W]: | 12 | Working temperature [°C]: | from -20 to +35 |
| Supply voltage [V]: | 220 - 240 | Motion sensor: | yes |
| Frequency [Hz]: | 50-60 | Number on the palette [pcs]: | 60 |
| Luminous flux [lm]: | 1350 | Net weight [kg]: | 1.300 |
| Luminous efficacy [lm/W]: | 113 | Category type: | bulkheads |
| Energy efficiency class: | E | LED lifespan L70B50 [h]: | 118000 |
| Electrical protection class: | II | LED lifespan L80B20 [h]: | 75000 |
| Colour temperature [K]: | 3000 | LED lifespan L90B10 [h]: | 36000 |
| Colour rendering index: | 80 | SDCM: | ≤ 3 |
| Power factor: | 0.90 | Ring material: | ABS |
| Beam angle [°]: | 120 | Mounting dimensions [mm]: | 165/165 |
| Diffuser material: | PC | Dimensions of single box [mm]: | 100 |
| Diffuser type: | OPAL | AC voltage range [V]: | 198 - 264 |
| Material of the body: | PP | DC voltage range [V]: | 176-276 |
| Colour of the body: | white | Warranty [years]: | 5 |
| Ring colour: | white | CE certificate: | 92/2025 |
| Dimensions (H/W/T/S) [mm]: | ø390/110 | Manual: | Download PDF |

LIGHT CURVES

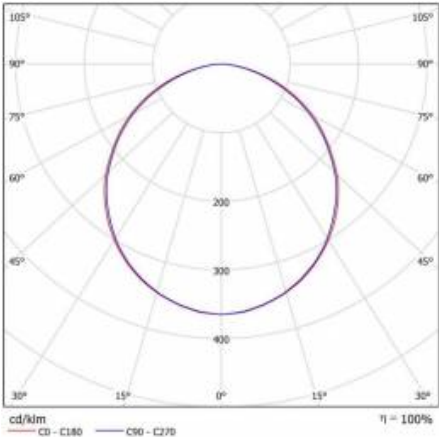

Card creation date: 21 July 2025
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric and electronic waste equipment regulations (WEEE).

CE Certificate CE - Nr: 92/2025



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl