


BARIS 52 LED UGR PLUS N 1703MM 5525LM 840 IP44 I CL. DALI WHITE 40W NO DIFFUSER 70D (27W/M)

DETAILED CARD

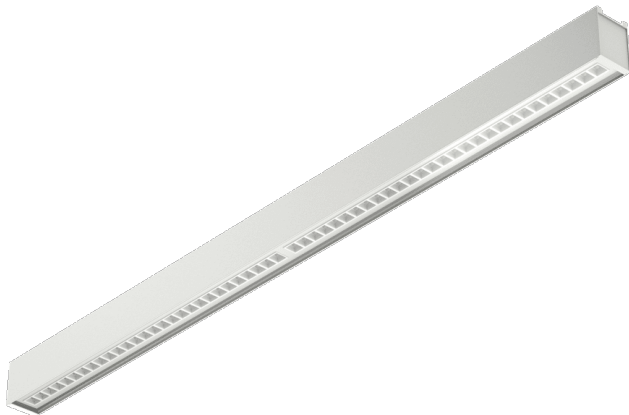

TECHNICAL PARAMETERS

Index:	122477
Ingress protection:	IP44
Impact resistance:	IK03
Luminaire power [W/m]:	27
Luminous flux [lm]*:	5525
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	C
Material of the body:	aluminium

CHARACTERISTICS

Baris 52 LED UGR Plus is a modern LED linear luminaire designed for flexible, elegant lighting arrangements. Available in 9 lengths (1143–5623 mm) and with the possibility of connecting into unlimited lines, it fits perfectly into any interior. Precise UGR < 19 optics ensure comfortable working conditions, while efficiency of up to 143 lm/W guarantees high performance and energy savings. Available in surface-mounted or suspended versions, in grey, white and black, with an aluminium body and DALI or on/off control. It is the perfect combination of modern design, quality and functionality – ideal for offices, commercial spaces and modern interiors.

APPLICATION

The luminaire is designed for indoor use. It is used as a main light source and is ideal for office work requiring visual concentration. Its unique design, energy-efficient LED modules and compatibility with external DALI lighting control systems make it ideal for use in modern A+ class office buildings, particularly in representative rooms.

BARIS 52 LED UGR PLUS N 1703MM 5525LM 840 IP44 I CL. DALI WHITE 40W NO DIFFUSER 70D (27W/M)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	122477	Optics material:	PC
EAN:	5905963122477	Optics:	lens
Light source:	LED module	Material of the body:	aluminium
Luminaire power [W/m]:	27	Colour of the body:	white
Supply voltage [V]:	220-240	Dimensions (H/W/T/S) [mm]:	69/52/1703
Frequency [Hz]:	50-60	Impact resistance:	IK03
Luminous flux [lm]:	5525	Ingress protection:	IP44
Luminous efficacy [lm/W]:	138	Mounting version:	surface
Energy efficiency class:	C	Working temperature [°C]:	35
Electrical protection class:	I	DIMM DALI:	yes
Colour temperature [K]:	4000	Net weight [kg]:	2.950
Color rendering index (Ra) >:	80	UGR (4H8H):	<19
SDCM:	3	Warranty [years]:	5
Power factor:	0.95	CE certificate:	146/2025
LED lifespan L70B50 [h]:	153000	Manual:	Download PDF
LED lifespan L80B20 [h]:	100000	Environmental Product Declaration (EPD):	852/2025
LED lifespan L90B10 [h]:	50000	Plik LDT:	Download
Beam angle [°]:	70		

Card creation date: 04 December 2025
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 146/2025



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl