

# GAMMA LED BASIC 280 2100LM 840 IP54 II CL. SIDE PIR OPAL (16W) 280MM + REMOTE CONTROL

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	192302
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK10
<b>Nominal power [W]:</b>	16
<b>Luminous flux [lm]*:</b>	2100
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	PP
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

The latest version of our bestseller - even better performance, same proven quality.

Surface-mounted, round LED light fitting, ingress protection class IP54, and an integrated energy-saving light source LED. White base; diffuser made of impact-resistant PC provides even light distribution and ensures a high impact resistance class (IK10).

## APPLICATION

Surface mounted fitting intended for indoor use in representative rooms and passageways (large conference halls, hotel corridors, studies). Designed for mounting on ceilings and walls. Wide range of diameters and two diffuser versions allow for the same fitting to be used in rooms with different parameters. Well suited to be used as a basic or general interior light source.

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


# GAMMA LED BASIC 280 2100LM 840 IP54 II CL. SIDE PIR OPAL (16W) 280MM + REMOTE CONTROL

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	192302	Colour of the body:	white
EAN:	5905963192302	Dimensions (H/W/T/S) [mm]:	ø280/72
Light source:	LED module	Mounting dimensions [mm]:	160
Nominal power [W]:	16	Impact resistance:	IK10
Rated power of the luminaire [W]:	16	Ingress protection:	IP54
Supply voltage [V]:	220-240	Mounting version:	surface
Luminous flux [lm]:	2100	Working temperature [°C]:	from -20 to +25
Luminous efficacy [lm/W]:	131	Dimensions of single box [mm]:	280
Energy efficiency class:	E	Number on the palette [pcs]:	80
Electrical protection class:	II	Net weight [kg]:	0.430
Colour temperature [K]:	4000	Category type:	bulkheads
Color rendering index (Ra) >:	80	AC voltage range [V]:	220-240
SDCM:	3	Light distribution type:	open space
Power factor:	0.55	PIR:	yes
LED lifespan L70B50 [h]:	125000	LED lifespan L80B10 [h]:	79500
Beam angle [°]:	120	LED lifespan L90B10 [h]:	38500
Surge protection [kV]:	1	Warranty [years]:	5
Diffuser material:	PC	CE certificate:	<a href="#">48/2025</a>
Diffuser type:	OPAL	PZH certificate:	
Diffuser colour:	white	Environmental Product Declaration (EPD):	<a href="#">944/2026</a>
Optics material:	PC	Manual:	<a href="#">Download PDF</a>
Material of the body:	PP	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018

## LIGHT CURVES

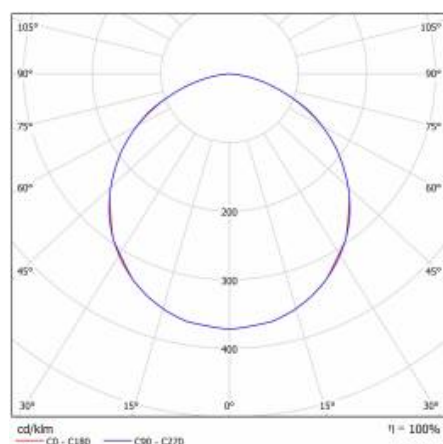

# GAMMA LED BASIC 280 2100LM 840 IP54 II CL. SIDE PIR OPAL (16W) 280MM + REMOTE CONTROL

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
WSE0005	RC MOS MR004 IoT programming remote control



RC MOS MR004 IoT programming  
remote control (WSE0005)

Card creation date: 29 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 48/2025