


LINERO LED 632MM 15650LM 840 IP66 SN 111W

DETAILED CARD

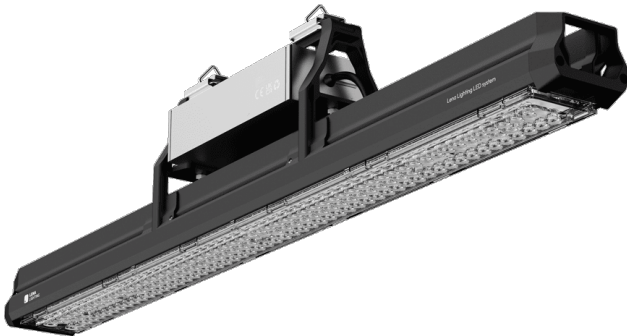

TECHNICAL PARAMETERS

Index:	488283
Ingress protection:	IP66
Rated power of the luminaire [W]*:	111
Luminous flux [lm]*:	15650
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Electrical protection class:	II
Energy efficiency class:	C
Material of the body:	aluminium
Mounting version:	surface, suspended

CHARACTERISTICS

A family of lightweight, linear, high-bay, hermetic luminaires made of extruded aluminium, with a heat sink to dissipate excess heat and a separate compartment for the power supply. It combines durability and tightness with maximum light efficiency. Its uncompromising, modern design represents a breakthrough in the design of efficient and economical industrial luminaires. The modular construction allows for maximum light output at low cost and size. Professional optics made of durable polycarbonate (PC) provide great freedom in choosing the optimal solution, even at significant mounting heights.

APPLICATION

Designed for the most demanding production and warehouse spaces.

LINERO LED 632MM 15650LM 840 IP66 SN 111W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	488283	Colour of the body:	black
EAN:	5905963488283	Dimensions (H/W/T/S) [mm]:	632/61/129
Light source:	LED module	Mounting dimensions [mm]:	129
Rated power of the luminaire [W]:	111	Ingress protection:	IP66
Luminous flux [lm]:	15650	Mounting version:	surface, suspended
Supply voltage [V]:	220-240	Working temperature [°C]:	35
Luminous efficacy [lm/W]:	141	Dimensions of single box [mm]:	188/89/293
Energy efficiency class:	C	Light distribution type:	SN
Electrical protection class:	II	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour temperature [K]:	4000	Warranty [years]:	5
Color rendering index (Ra) >:	80	CE certificate:	152/2025
Material of the body:	aluminium	Manual:	Download PDF