

CAMEA SMD LED 9W MAT BIAŁY 4000K LC

DETAILED CARD



TECHNICAL PARAMETERS

Index:	067259
Ingress protection:	IP44
Impact resistance:	IK10
Nominal power [W]:	9
Luminous flux [lm]*:	980
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	PP
Diffuser type:	OPAL

CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, ingress protection class IP44 and an integrated energy-saving lights source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10).

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for indoor use (usable rooms, staircases, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms.


CAMEA SMD LED 9W MAT BIAŁY 4000K LC

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø300/90
Nominal power [W]:	9	Impact resistance:	IK10
Rated power of the luminaire [W]:	10	Ingress protection:	IP44
Supply voltage [V]:	220-240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -17 to +35
Luminous flux [lm]:	980	Net weight [kg]:	0.600
Luminous efficacy [lm/W]:	98	CE certificate:	397/2023
Energy efficiency class:	E	Index:	067259
Electrical protection class:	I	EAN:	5905963067259
Colour temperature [K]:	4000	Category type:	bulkheads
Colour rendering index:	>80	Luminaire rated power Omin [W]:	10
SDCM:	≤ 3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	OPAL	Warranty [years]:	5
Material of the body:	PP	LED lifespan L80B20 [h]:	60000
Ring colour:	white	Manual:	Download PDF

LIGHT CURVES

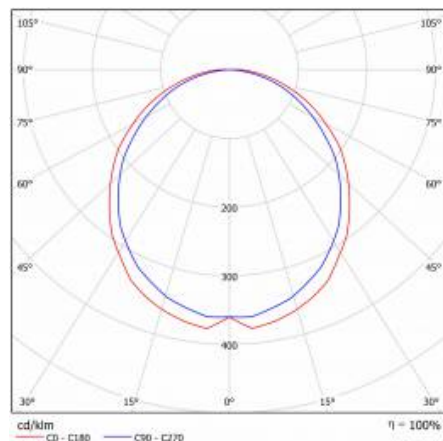

Card creation date: 27 October 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 397/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl