

# CORAL LED N RCR 10W 3000K BEZ PIERŚCIENIA

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	229817
<b>Ingress protection:</b>	IP44
<b>Impact resistance:</b>	IK10
<b>Nominal power [W]:</b>	10
<b>Luminous flux [lm]*:</b>	800
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	G
<b>Material of the body:</b>	PP

## CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

## APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.


# CORAL LED N RCR 10W 3000K BEZ PIERŚCIENIA

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Material of the body:	PP
Nominal power [W]:	10	Dimensions (H/W/T/S) [mm]:	ø260/108
Rated power of the luminaire [W]:	12	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP44
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	800	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	66	Motion sensor:	yes
Energy efficiency class:	G	Net weight [kg]:	0.620
Electrical protection class:	II	CE certificate:	<a href="#">46/2014</a>
Colour temperature [K]:	3000	Index:	229817
Colour rendering index:	>80	EAN:	5905963229817
SDCM:	≤ 3	Category type:	bulkheads
Power factor:	0.59	Luminaire rated power $P_{min}$ [W]:	12
LED lifespan L70B50 [h]:	81 000	ETIM class:	EC002892
Beam angle [°]:	120	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Exchangeable source:	yes	Warranty [years]:	5
Diffuser type:	OPAL	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

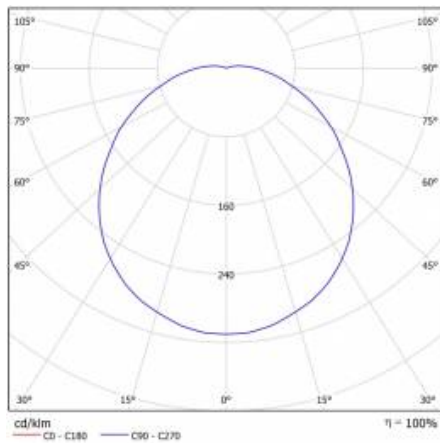


# CORAL LED N RCR 10W 3000K BEZ PIERŚCIENIA

---

DETAILED CARD

## TECHNICAL DETAILS

---



CORAL LED natynkowe prowadzenie przewodów

# CORAL LED N RCR 10W 3000K BEZ PIERŚCIENIA

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
229831	CORAL- 10W service kit 10W 3000K
229770	CORAL- 10W service kit 10W 4000K
229848	CORAL- 10W service kit 10W RCR 3000K
229787	CORAL- 10W service kit 10W RCR 4000K
229763	CORAL - flush-mounting support



CORAL- 10W service kit 10W 3000K (229831)



CORAL- 10W service kit 10W 4000K (229770)



CORAL- 10W service kit 10W RCR 3000K (229848)



CORAL- 10W service kit 10W RCR 4000K (229787)



CORAL - flush-mounting support (229763)

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 46/2014