
TERRACO AS LED ALU PRM 1300LM IP54 I CL. 840 18W GRAPHITE

DETAILED CARD

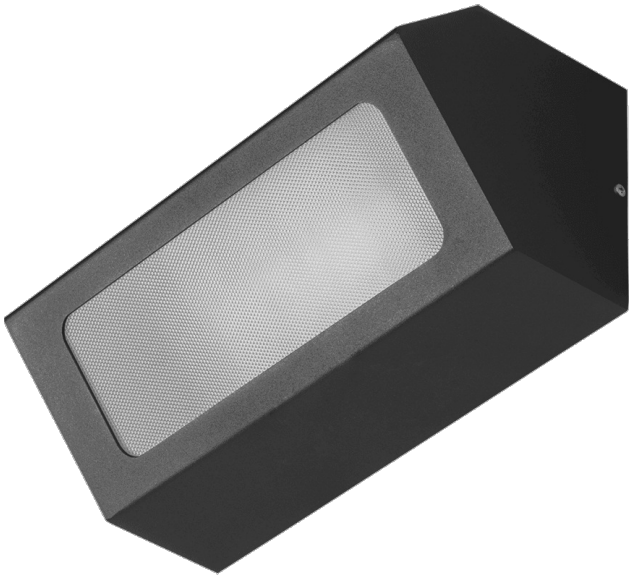

TECHNICAL PARAMETERS

Index:	995712
Nominal power [W]:	18
Luminous flux [lm]*:	1300
Colour temperature [K]:	4000
Ingress protection:	IP54
Impact resistance:	IK04
Material of the body:	aluminium
Colour of the body:	graphite
Diffuser material:	PMMA
Diffuser type:	PRM

CHARACTERISTICS

Terraco AS LED is a luminaire with a modernist structure, distinguished by its striking minimalist design. The powder-coated aluminium body is available in four colours: grey, graphite, white and black. It features a high IP54 protection rating. It is designed for surface mounting.

APPLICATION

The Terraco AS LED luminaire is particularly well-suited for external façade lighting, as well as for illuminating terraces and balconies. Its compact dimensions broaden its range of applications – it can illuminate recesses or hard-to-reach areas. Terraco luminaires can also be used indoors and arranged in various ways on walls to create interesting lighting schemes.

TERRACO AS LED ALU PRM 1300LM IP54 I CL. 840 18W GRAPHITE

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	995712
EAN:	5905963995712
Light source:	LED module
Nominal power [W]:	18
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50-60
Luminous flux [lm]:	1300
Luminous efficacy [lm/W]:	72
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	4
Power factor:	0.99
Exchangeable source:	yes
Diffuser material:	PMMA
Diffuser type:	PRM
Diffuser colour:	milky
Optics:	general
Material of the body:	aluminium


Colour of the body:	graphite
Dimensions (H/W/T/S) [mm]:	260/110/120
Impact resistance:	IK04
Ingress protection:	IP54
Mounting version:	surface
Working temperature [°C]:	from -25 to +35
Number on the palette [pcs]:	120
Net weight [kg]:	0.950
Gross weight [kg]:	1.100
Category type:	accent lighting
AC voltage range [V]:	220 - 240
LED lifespan L70B50 [h]:	134000
LED lifespan L80B10 [h]:	86000
LED lifespan L90B10 [h]:	46000
Light distribution type:	DIR
Warranty [years]:	5
CE certificate:	71/2026
Manual:	Download PDF
Plik LDT:	Download

TERRACO AS LED ALU PRM 1300LM IP54 I CL. 840 18W GRAPHITE

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
WSE0005	RC MOS MR004 IoT programming remote control



RC MOS MR004 IoT programming remote control (WSE0005)

Card creation date: 14 October 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 71/2026

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl