


LINEA LED EVO 1404MM 4150LM DALI LS2 840 ASYMETRYCZNY (30W)

DETAILED CARD

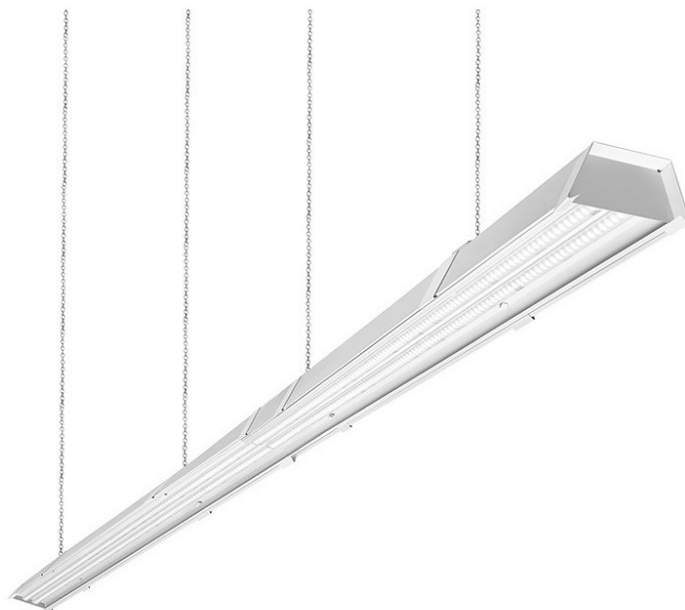

TECHNICAL PARAMETERS

Index:	150937
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	30
Luminous flux [lm]*:	4150
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	D
Material of the body:	powder coated steel
Colour of the body:	white

CHARACTERISTICS

System of suspended industrial lighting line with integrated energy-saving LED light source. Through-wiring and line connector enable quick assembly of the fitting. Equipped with an unique panel mounting systems facilitating the easy assembly of the product. Available with various types of optic: 90°, 60° 45° 20°, asymmetric and butterfly.

APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.

LINEA LED EVO 1404MM 4150LM DALI LS2 840


ASYMETRYCZNY (30W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Mounting dimensions [mm]:	1110
Nominal power [W]:	30	Impact resistance:	IK07
Rated power of the luminaire [W]:	31.90	Ingress protection:	IP20
Supply voltage [V]:	220-240	Mounting version:	surface, suspended
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -25 to +35
Luminous flux [lm]:	4150	DIMM DALI:	yes
Luminous efficacy [lm/W]:	130	Through wiring:	LS2
Energy efficiency class:	D	Net weight [kg]:	3.500
Electrical protection class:	I	CE certificate:	22/2017
Colour temperature [K]:	4000	Index:	150937
Colour rendering index:	>80	EAN:	5,90596E+12
SDCM:	≤ 3	Category type:	systems
Power factor:	0.98	Light distribution type:	asymmetric
Beam angle [°]:	Asymmetric	ETIM class:	EC000282
Diffuser material:	PMMA	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	milky	Warranty [years]:	5
Optics material:	PMMA	LED lifespan L70B50 [h]:	116000
Optics:	lens	LED lifespan L90B10 [h]:	35000
Material of the body:	powder coated steel	LED lifespan L80B20 [h]:	72000
Colour of the body:	white	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	1404/115/64	Manual:	Download PDF

LIGHT CURVES

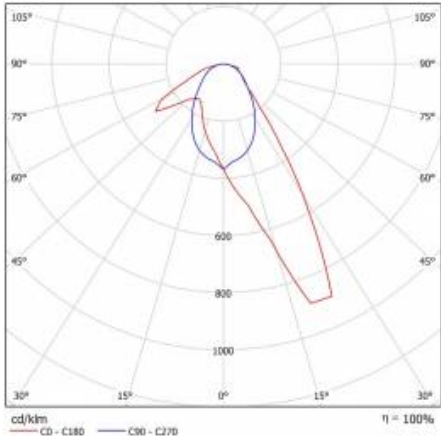

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 22/2017



LENA
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl