

TUBE LED EVO 2 DALI 21W 4000K LS2 60 MEDIUM BEAM

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP65
Impact resistance:	IK08
Nominal power [W]:	21
Luminous flux [lm]*:	2500
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	PC
Diffuser type:	transparent

CHARACTERISTICS

LED luminaire system designed for suspended and surface mounting on walls and ceilings. Provides a combination of high illumination parameters and functionality. With its slim diameter of 42 mm possible to mount in hard-to-reach locations. Mounting is easy and quick. Due to the line lens, it is possible to adjust the fitting to different lighting requirements – three light distribution options: 90°, 60°, 30°.

APPLICATION

Luminaire intended for both outdoor and indoor use in industry areas and passageways. Provides good surface lighting and is perfect in situations that require eyesight concentration. Four housing sizes available. Suitable for mounting in all types of suspended ceilings (modular, plasterboard).


TUBE LED EVO 2 DALI 21W 4000K LS2 60 MEDIUM BEAM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Material of the body:	PC
Nominal power [W]:	21	Colour of the body:	silver
Rated power of the luminaire [W]:	24	Dimensions (H/W/T/S) [mm]:	42/45/1065
Supply voltage [V]:	220-240	Mounting dimensions [mm]:	1047
Frequency [Hz]:	50 - 60	Impact resistance:	IK08
Luminous flux [lm]:	2500	Ingress protection:	IP65
Luminous efficacy [lm/W]:	119	Mounting version:	surface, suspended
Energy efficiency class:	E	DIMM DALI:	yes
Electrical protection class:	I	Through wiring:	LS2
Colour temperature [K]:	4000	Net weight [kg]:	1.100
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	CE certificate:	226/2023
Power factor:	0.92	Index:	267703
LED lifespan L70B50 [h]:	50000	EAN:	5905963267703
Diffuser type:	transparent	Category type:	battens
Optics material:	PMMA	Warranty [years]:	5
Optics:	lens	Manual:	Download PDF

LIGHT CURVES

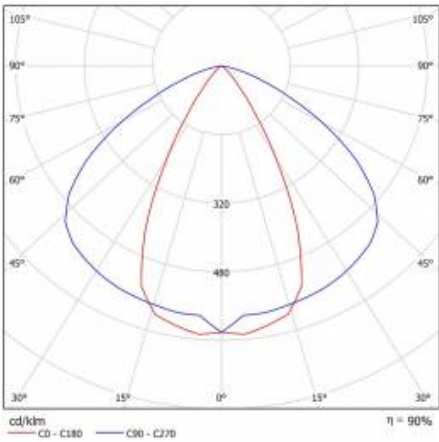

TUBE LED EVO 2 DALI 21W 4000K LS2 60 MEDIUM BEAM


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
267604	Tube LED EVO surface mounting bracket adjustable +/- 100 degrees
266591	Tube LED EVO electric suspension
266607	Tube LED EVO suspension cord
266829	Tube LED EVO Suspension (round box)
266492	Star connector TUBE LED EVO system
266485	Star connector TUBE LED EVO system matt white
266478	Star connector TUBE LED EVO system matt black



Tube LED EVO surface mounting bracket adjustable +/- 100 degrees (267604)



Tube LED EVO suspension cord (266607)



Star connector TUBE LED EVO system (266492)

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 226/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl