

# RQ 160 LED N VD 650LM MAT 830 (8W)

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	570469
Ingress protection:	IP33
Impact resistance:	IK08
Nominal power [W]:	8
Luminous flux [lm]*:	650
Colour temperature [K]:	3000
Colour rendering index:	>80
Energy efficiency class:	G
Material of the body:	ABS
Colour of the body:	white

## CHARACTERISTICS

RQ 160 LED N VD is a new line of round luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

## APPLICATION

Surface-mounted luminaire is especially recommended for offices, spacious corridors and public spaces.


# RQ 160 LED N VD 650LM MAT 830 (8W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	570469	Dimensions (H/W/T/S) [mm]:	166/86
Light source:	LED module	Mounting dimensions [mm]:	117
Nominal power [W]:	8	Impact resistance:	IK08
Rated power of the luminaire [W]:	10	Ingress protection:	IP33
Supply voltage [V]:	220 - 240	Glow wire test [°C]:	650
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	650	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	67	Net weight [kg]:	0.300
Energy efficiency class:	G	Warranty [years]:	5
Electrical protection class:	II	Category type:	downlights
Colour temperature [K]:	3000	LED lifespan L70B50 [h]:	132000
Colour rendering index:	>80	LED lifespan L80B20 [h]:	84000
SDCM:	≤ 3	LED lifespan L90B10 [h]:	42000
Power factor:	0.99	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Beam angle [°]:	110	Warranty [years]:	5
Diffuser material:	PC	Category of application:	HoReCa, commercial facilities, educational institutions, art and culture
Diffuser type:	MAT	Manual:	<a href="#">Download PDF</a>
Material of the body:	ABS	CE certificate:	<a href="#">155/2020</a>
Colour of the body:	white		

## LIGHT CURVES

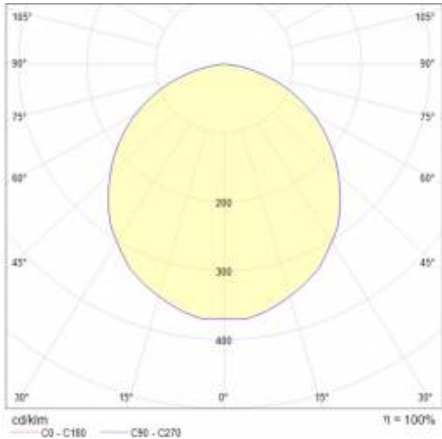

Card creation date: 23 September 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 155/2020



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)