

RQ 160 LED P VD 800LM PRM 830 (8W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	570216
Ingress protection:	IP44/20
Nominal power [W]:	8
Luminous flux [lm]*:	800
Colour temperature [K]:	3000
Electrical protection class:	II
Energy efficiency class:	F
Material of the body:	ABS
Colour of the body:	white
Diffuser material:	PC

CHARACTERISTICS

RQ 160 LED P is a new line of round luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

APPLICATION

Recessed-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


RQ 160 LED P VD 800LM PRM 830 (8W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	570216	Dimensions (H/W/T/S) [mm]:	162/70
Light source:	LED module	Mounting dimensions [mm]:	150
Nominal power [W]:	8	Impact resistance:	IK08
Rated power of the luminaire [W]:	10	Ingress protection:	IP44/20
Supply voltage [V]:	220 - 240	Glow wire test [°C]:	650
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	800	Number on the palette [pcs]:	420
Luminous efficacy [lm/W]:	83	Warranty [years]:	5
Energy efficiency class:	F	Flicker procent:	100
Electrical protection class:	II	Luminous flux of the luminaire 0 min [lm]*:	799
Colour temperature [K]:	3000	ITHD [%]:	11
Colour rendering index:	>80	LED lifespan L70B50 [h]:	132000
SDCM:	≤ 3	LED lifespan L80B20 [h]:	84000
Power factor:	0.99	Rated current of the diode [mA]:	60
Beam angle [°]:	115	Technical Warranty:	5
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	PRM	Category of application:	HoReCa, commercial facilities, educational institutions, art and culture
Material of the body:	ABS	Manual:	Download PDF
Colour of the body:	white	CE certificate:	153/2020

LIGHT CURVES

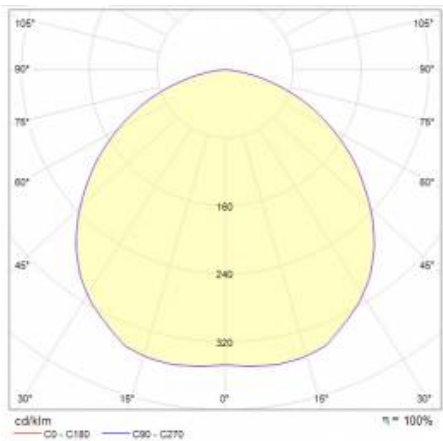

Card creation date:13 September 2021
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 153/2020