

MODO LED FI 185 1435LM 857 IP67 I CL. 30° (18W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	958434
Ingress protection:	IP67
Impact resistance:	IK10
Rated power of the luminaire [W]*:	18
Luminous flux [lm]*:	1435
Colour temperature [K]:	5700
Energy efficiency class:	F
Material of the body:	odlew aluminiowy
Diffuser material:	tempered glass
Diffuser type:	transparent

CHARACTERISTICS

Energy-saving, outdoor up-light fitting designed for ground mounting. It ensures economical and long-term operation without the need to replace light sources. It stands out with high ingress protection rating of IP67, thus making it resistant to immersion in water. In order to ensure optimum performance, it is made of aluminium and tempered glass which is additionally protected with a seal. Available in many light distribution options.

APPLICATION

The fitting is a popular choice both as facade lighting of various premises, like for example: office buildings, commercial buildings, car showrooms, religious buildings and also green spaces, parks and other architectural structures.


MODO LED FI 185 1435LM 857 IP67 I CL. 30° (18W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Ring material:	Steel
Rated power of the luminaire [W]:	18	Ring colour:	silver
Colour temperature [K]:	5700	Mounting dimensions [mm]:	ø172/123,6
Luminous flux [lm]:	1435	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP67
Diffuser type:	transparent	Warranty [years]:	2
Frequency [Hz]:	50 - 60	Index:	958434
Beam angle [°]:	30	EAN:	5905963958434
Dimensions (H/W/T/S) [mm]:	ø185/123,6	Category type:	accent lighting
Energy efficiency class:	F	AC voltage range [V]:	220 - 240
Electrical protection class:	I	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	tempered glass	Luminous efficacy [lm/W]:	80
Optics material:	PMMA	Manual:	Download PDF
Optics:	lens	Plik LDT:	Download
Material of the body:	odlew aluminiowy		

LIGHT CURVES

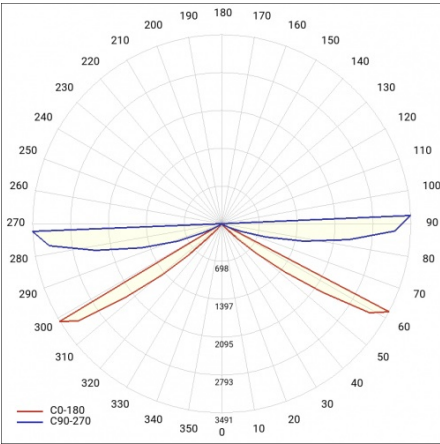

Card creation date:12 January 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 86/2019



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl